

D

C

B

A

D

C

B

A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

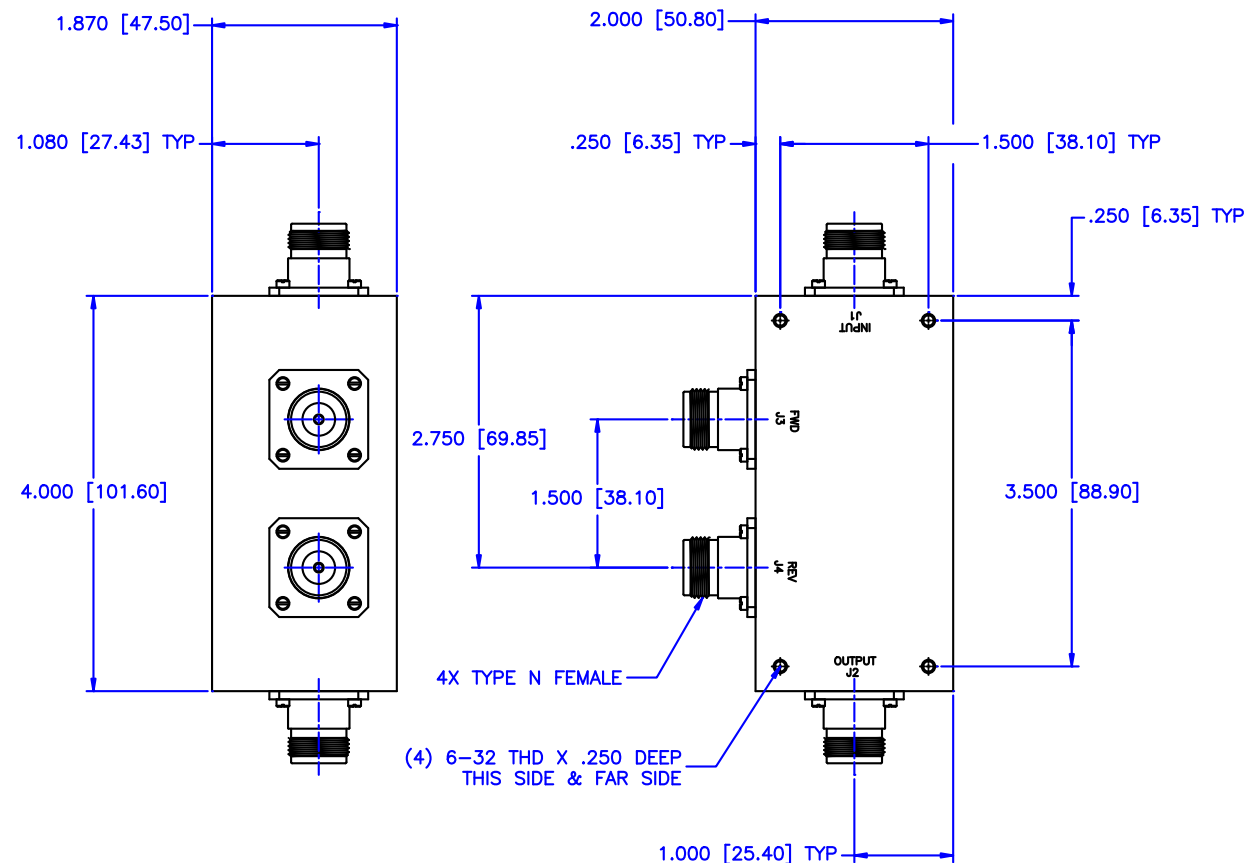

SPECIFICATIONS

FREQUENCY RANGE: 2-32 MHz
FREQUENCY SENSITIVITY: ± 0.20 dB
INSERTION LOSS: 0.3 dB Max.
DIRECTIVITY: 25 dB Min.
VSWR PRIME LINE: 1.10:1 Max.
POWER: 1000 Watts

MATERIAL:	
DRAWN:	Paiboon Luekhamthan
DATE:	03-27-1999
APPROVED:	T. Nguyen
DATE:	03-27-1999

MCLI UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$ THIRD ANGLE PROJECTION		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER		SHEET:	N/A
PART NO.		HDL-13-30			
CAGE CODE:		SIZE:	C	REV:	N/A
DWG NO.		DO NOT SCALE THE DRAWING		81245	