

MECHANICAL CHARACTERISTICS

INTERFACE	PER MICRO-COAX DRAWING A-18557
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	IEEE P287 REF.
RECOMMENDED MATING TORQUE	9 IN-LBS. NOM.
COUPLING NUT PROOF TORQUE	15 IN-LBS. MAX.
FORCE TO ENGAGE	2 IN-LBS. MAX.
FORCE TO DISENGAGE	2 IN-LBS. MAX.
COUPLING NUT RETENTION	60 LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MAX.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MAX.
CABLE RETENTION	10 LBS. MIN.
MASS	6.29 GRAMS NOM.

ELECTRICAL CHARACTERISTICS

IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	40 GHz
VSWR DC - 18 GHz	1.16:1 MAX.
18 GHz - 40 GHz	1.22:1 MAX.
INSERTION LOSS	0.03 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	675 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
CORONA	180 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL (5 MHz)	450 Vrms MIN.
CONTACT RESISTANCE (INNER)	3.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	3.0 MilliOhms MAX.

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE	-55°C TO 150°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%

MATERIALS AND FINISH


CONTACT	BERYLLIUM COPPER PER ASTM-B-196, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290.
BEAD	POLYETHERIMIDE THERMOPLASTIC, PER ASTM-D-5205
BODY, FRONT BODY, CLAMP NUT, COUPLING NUT, & SPACER RING	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
GASKET	SILICONE RUBBER PER ZZ-R-765
CONTACT RING-ELBOW	BRASS, PER ASTM-B-16, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197

APPLICATION

CABLE(S)	UFB142A SERIES CABLE
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

REV	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	07/22/2003	RDM	RDS
B	ECO 45013	01/09/2004	RDM	DBK
C	ECO 105601	8/2/2010	CCF	RS
D	ECO 135327	6/14/2013	MJM	RS

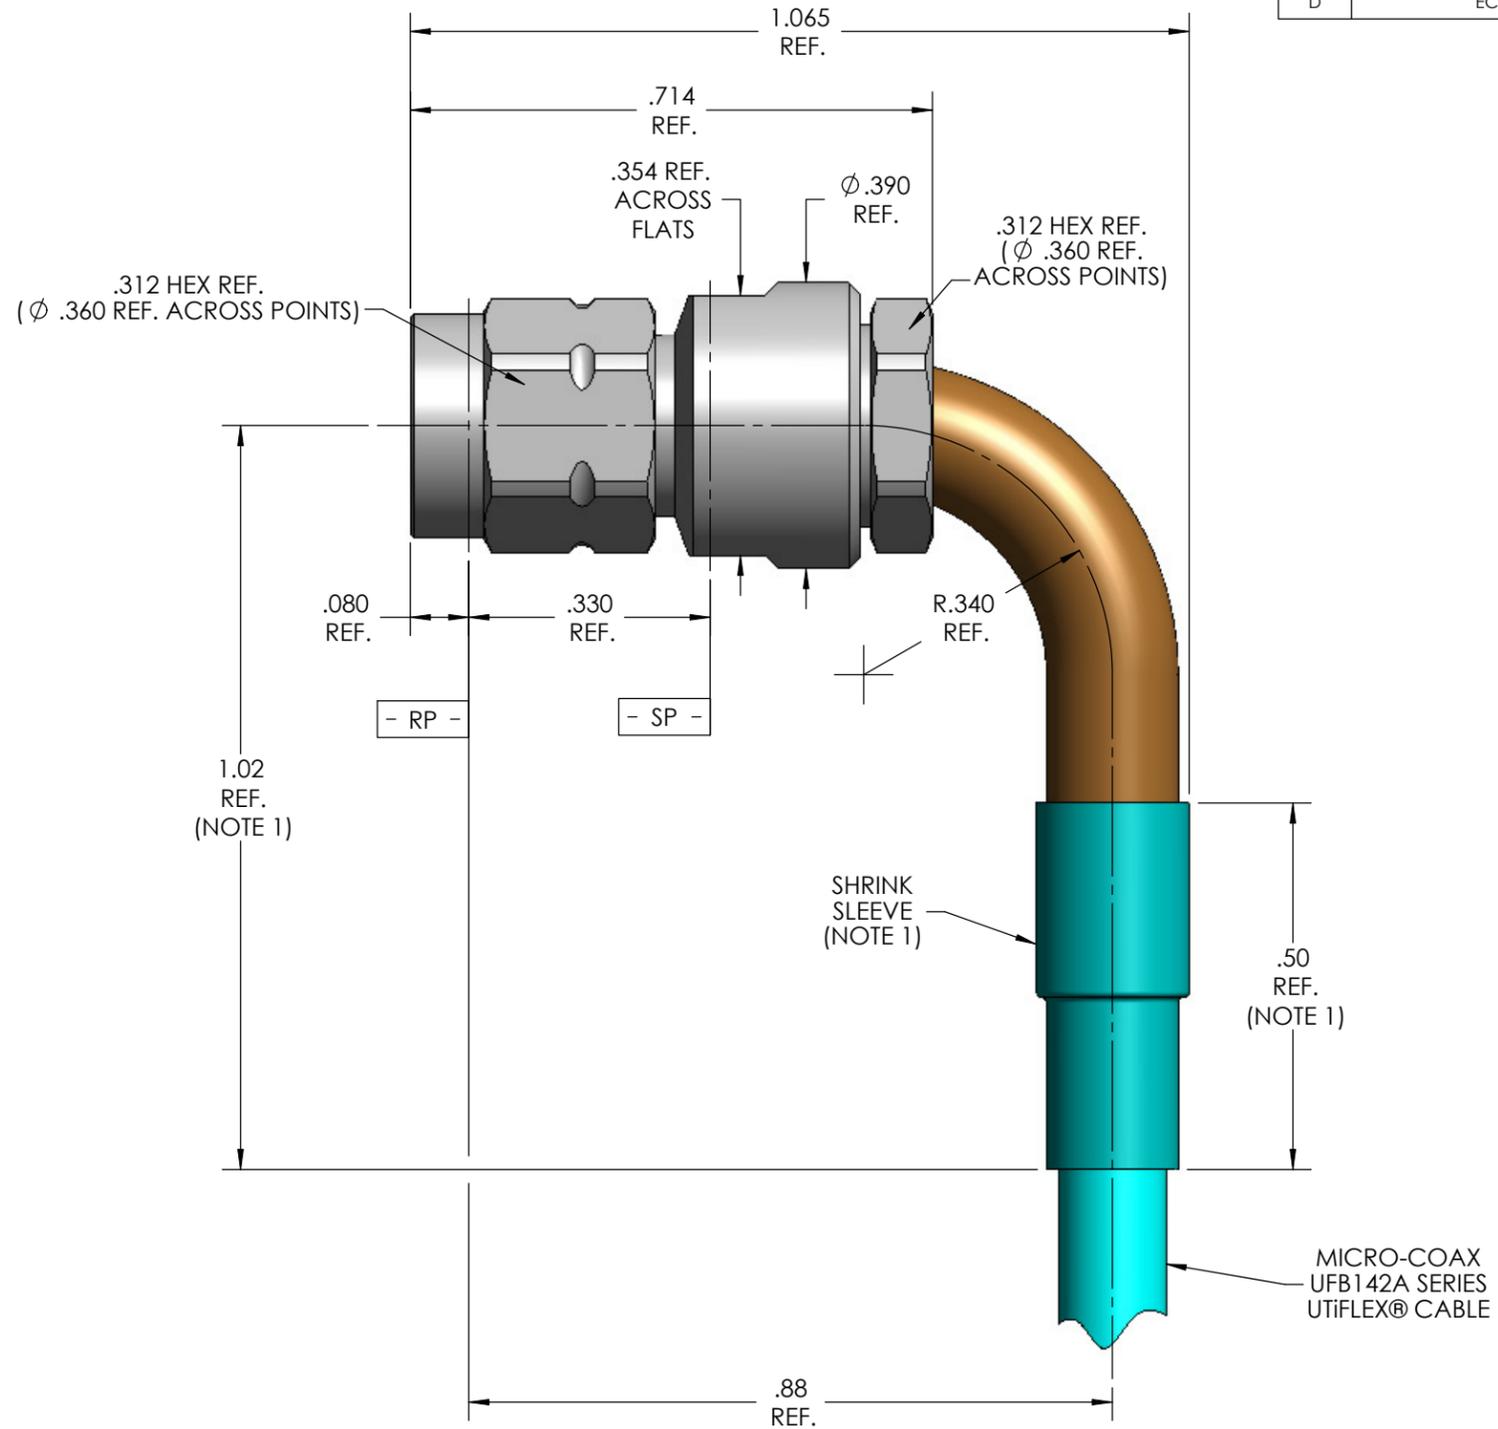

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.	INITIALS	DATE	 Leading the way in transmission line solutions. Copyright Micro-Coax, Inc.					
	DWN. CCF	08/02/10						
	CHKD. CCF	6/17/13						
	APPVD.							
TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE		2.4mm PLUG, UFB142A CABLE					
.XX ±.02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV
.XXX ±.005			64639	B	4:1	1 OF 1	SD903677	D
.XXXX ±.0010								
ANGLES ±2°								