

PART NO. : WVX-806P-30A810

◆ APPLICATION
> LTE Systems

◆ FEATURE
> High Reliability
> **RoHS Compliant**

◆ ELECTRICAL SPECIFICATION




ITEM	SPECIFICATION
Frequency Range	791~821 MHz
Operating Bandwidth	30 MHz
Insertion Loss in BW	3.5dB Max.
Ripple in BW	1.5dB Max.
Return Loss in BW	15.0dB Min.
Rejection	30dB Min. @ 832 ~ 862MHz
Input Power	5 Watts Max.
In/Out Impedance	50 Ohms Nominal

◆ ENVIRONMENTAL SPECIFICATIONS

ITEM	SPECIFICATION
Operating Temperature Range	-30°C to +80°C
Dimension	See the drawing

CERAMIC BPF

◆ OUTLINE DRWAING

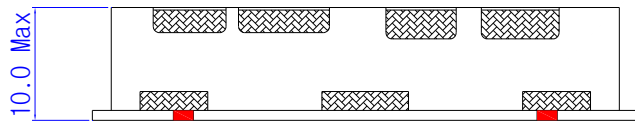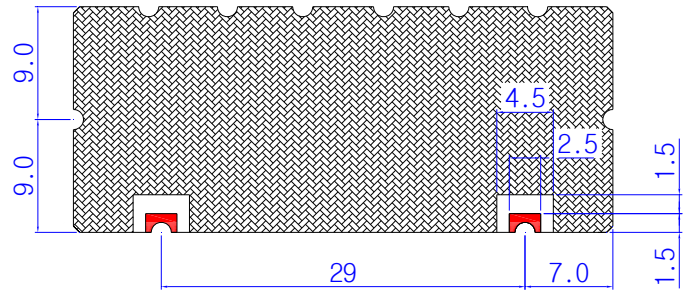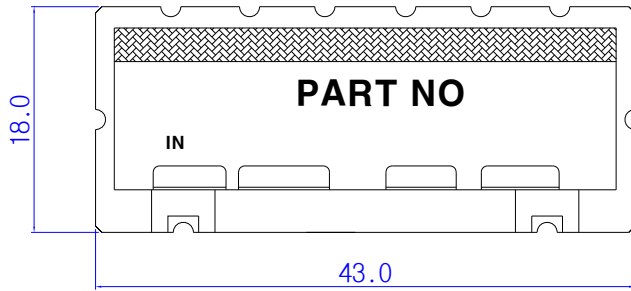

■ :I/O PORT
▨ :GROUND

TOLERANCE UNLESS
OTHERWISE SPECIFIED : ± 0.2
DIMENSIONS : mm

