


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

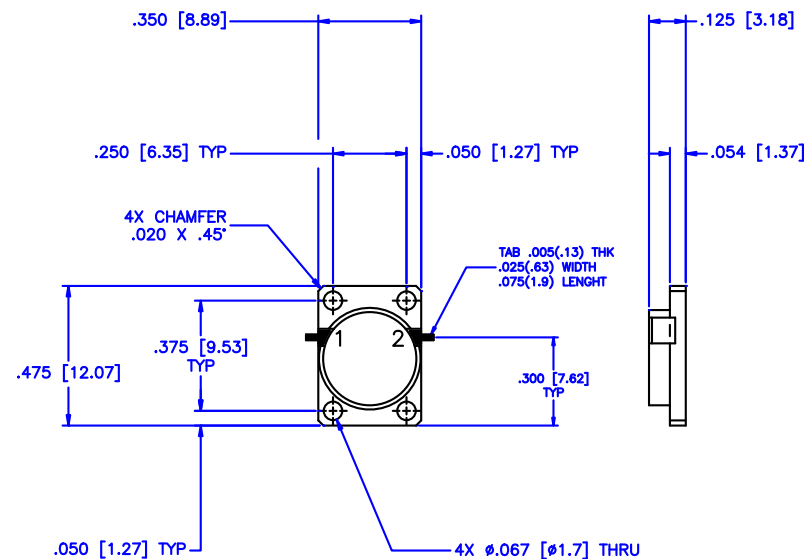

SPECIFICATIONS

Frequency Range: 9.37–10.10 GHz
 Insertion Loss: 0.5dB Max.
 Isolation: 20dB Min.
 VSWR: 1.22:1 Max.
 Impedance Nominal: 50 Ohms
 Power Rating: 1 Watt
 Operating Temperature: –30°C to +85°C
 Storage Temperature: –55°C to +100°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344–6254 FAX: (727) 381–6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: DROP-IN ISOLATOR			
		PART NO. DI-32			
DRAWN: Paiboon Luekhamhan		DATE: 01-05-2005		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 01-05-2005		SIZE: N/A REV: N/A DWG NO. 82154 DO NOT SCALE THE DRAWING	
		THIRD ANGLE PROJECTION 