



MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 319-1
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	MIL-PRF-39012/139 REF.
RECOMMENDED MATING TORQUE	5 IN-LBS. NOM.
COUPLING PROOF TORQUE	15 IN-LBS NOM.
COUPLING NUT RETENTION	60 LBS. MIN.
FORCE TO ENGAGE	2 LBS. MIN.
FORCE TO DISENGAGE	2 LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	4 LBS. MAX.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MAX.
CABLE RETENTION	10 LBS MIN.
MASS	1.60 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	40 GHz
VSWR DC - 18 GHz	1.16:1 MAX.
18 - 40GHz	1.25:1 MAX
INSERTION LOSS	0.03 √F (GHz)dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	650 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 40 GHz	-90 dB MIN.
CORONA	170 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	425 Vrms MIN.
CONTACT RESISTANCE (INNER)	4.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-62°C TO 165°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MOISTURE RESISTANCE	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
BODY	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
COUPLING NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATED PER ASTM-A-967
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
CONTACT	BERYLLIUM COPPER, ASTM-B-196 GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
DIELECTRIC STOP, DIELECTRIC BEAD	POLYETHERIMIDE THERMOPLASTIC, PER ASTM-D-5205E
INSULATOR	TFE FLUOROCARBON PER ASTM-D-1710
GASKET	SILICONE RUBBER PER A-A-59588 (ZZ-R-765)
APPLICATION	
CABLE(S)	088/092 SERIES
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

REV	DESCRIPTION	DATE	BY	APPVD	CHKD
1	PRELIMINARY RELEASE - ESR 1414001	1/15/2014	MJM	RS	CCF

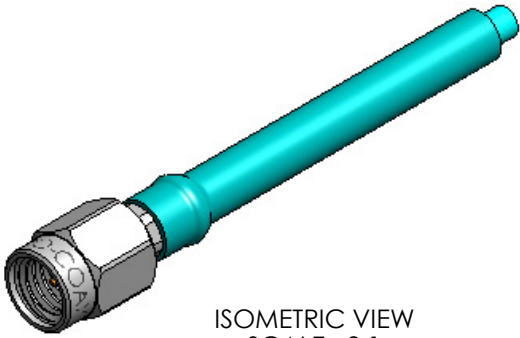

ISOMETRIC VIEW
SCALE: 2:1

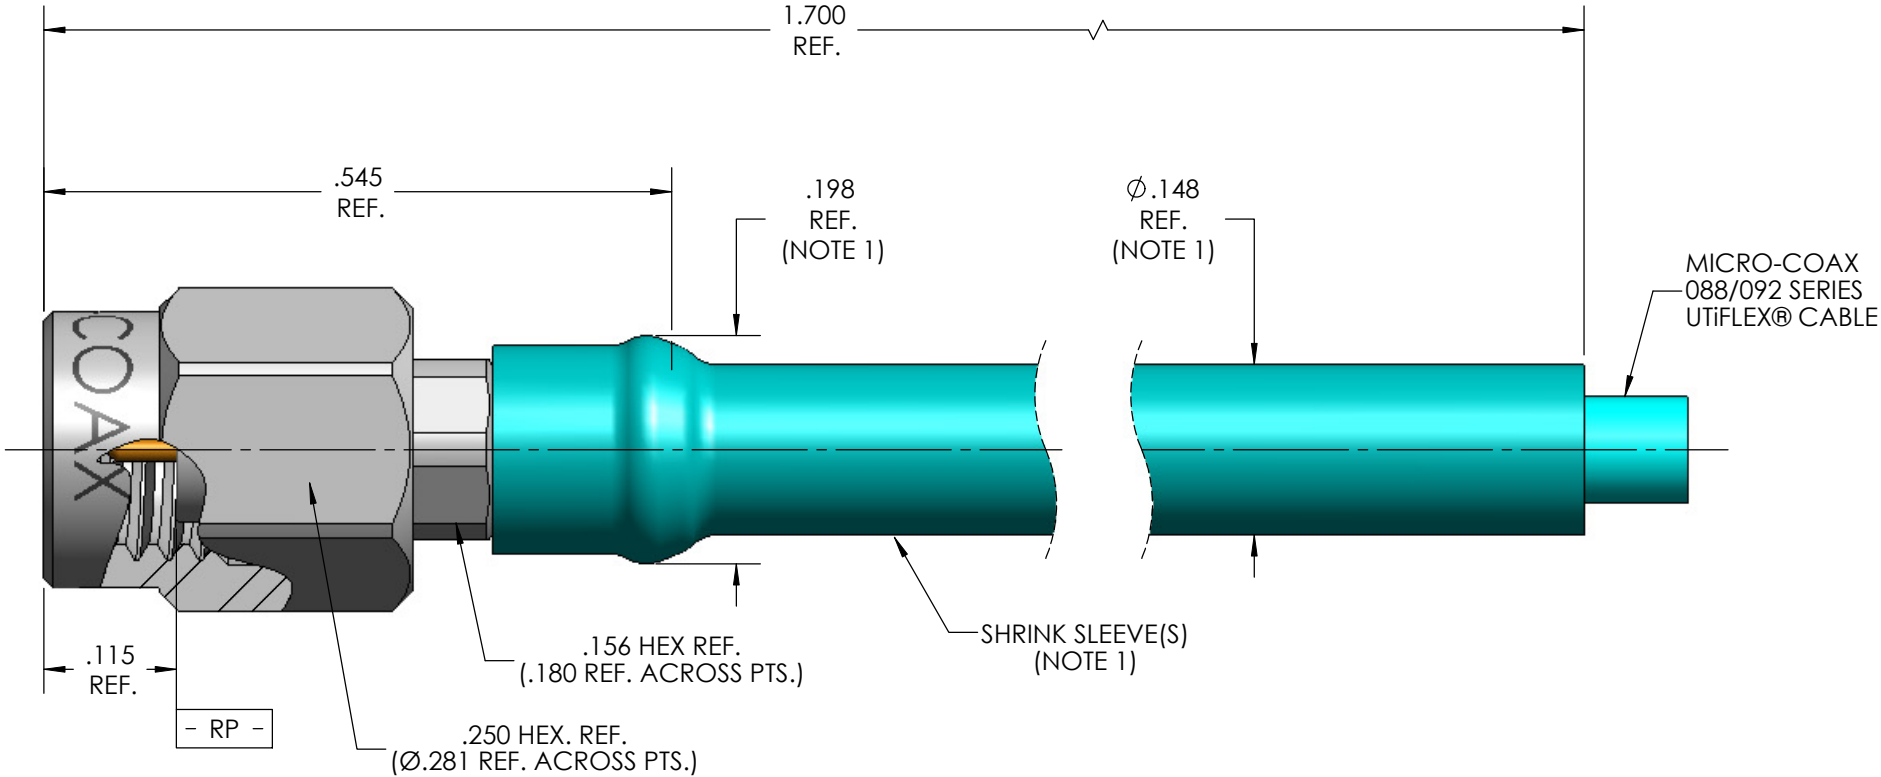

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.	INITIALS		DATE		MICRO-COAX PROVEN RELIABLE					
	DWN.	MJM	1/15/14							
	CHKD.	CCF	1/20/14							
	APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED			TITLE							
			SSMA, PLUG, 088/092 CABLE							
.XX	± .02		ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO. 64639	SIZE B	SCALE 6:1	SHEET NO. 1 OF 1	DRAWING NO. SD905319	REV 1
.XXX	± .005									
.XXXX	± .0010									
ANGLES	± 2°									

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.