


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

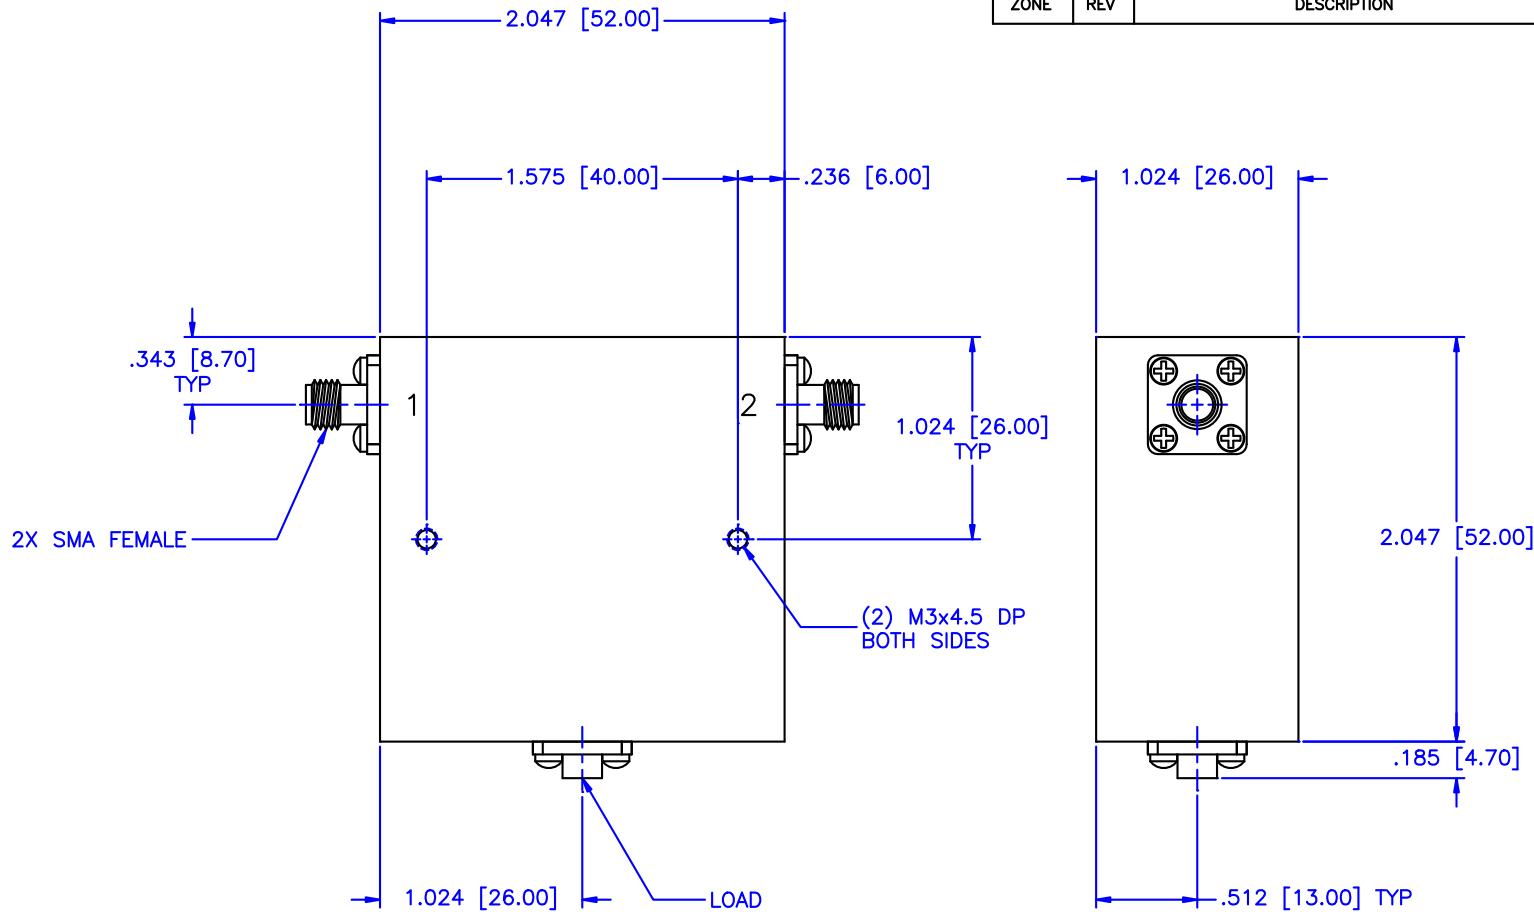

SPECIFICATIONS

Frequency Range: 0.5–0.7 GHz
 Isolation: 15dB Min.
 Insertion loss: 0.85dB Max.
 VSWR: 1.50:1 Max.
 Operating Temperature: 0°C to +50°C
 Forward Power: 1 Watt

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
				SHEET: N/A
		MCLI <small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02$ $\pm .008$ ANGLE: $\pm 1/2'$</small>		DRAWING TITLE: COAXIAL ISOLATOR
DRAWN: Paiboon Luekhamhan		DATE: 11-19-2013		PART NO. IS-108
APPROVED: T. Nguyen		DATE: 11-19-2013		CAGE CODE: OD2L5
				SIZE: A REV: A DWG NO. 84329
				DO NOT SCALE THE DRAWING