


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

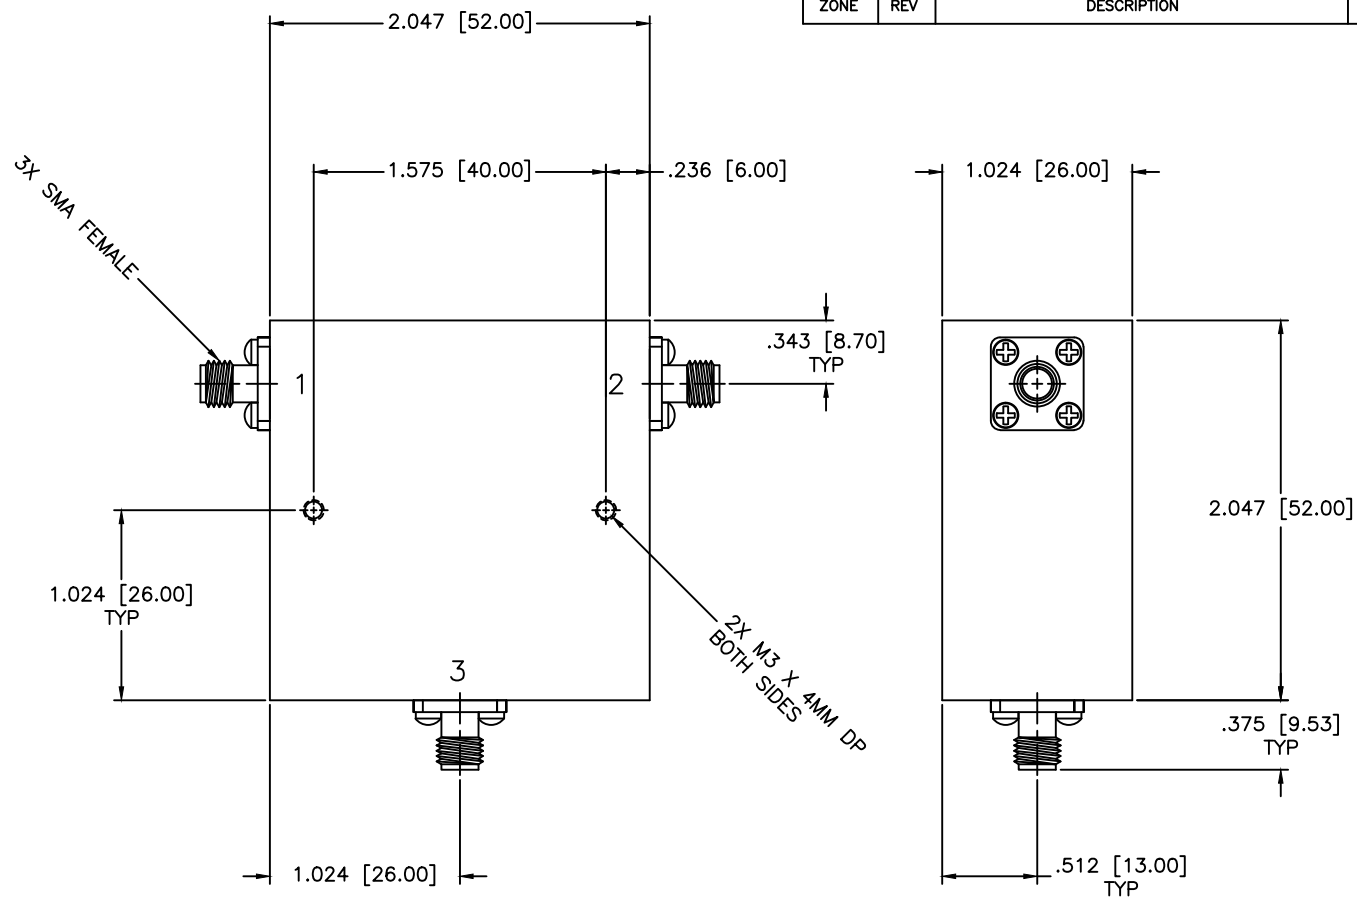

SPECIFICATIONS

Frequency Range: 0.5–0.7 GHz
 Isolation: 15dB Min.
 Insertion loss: 0.85dB Max.
 VSWR: 1.50:1 Max.
 Operating Temperature: 0°C to +50°C
 Power: 100W Avg, 500W Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A							
				SHEET:		N/A							
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR									
				PART NO. CS-108									
DRAWN: Paiboon Luekhamhan		DATE: 11-19-2013		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		SIZE: A		REV: A		DWG NO.	
APPROVED: T. Nguyen		DATE: 11-19-2013				OD2L5		DO NOT SCALE THE DRAWING		85634			
				THIRD ANGLE PROJECTION									