

DC BLOCKS

2.9mm, 10 MHz - 26.5 GHz, 200 Volts

SPECIFICATIONS:

Models: 8060, 8061, 8062

Electrical:

Frequency Range _____ 10 MHz - 26.5 GHz
VSWR _____ 1.35:1 Max.
Impedance _____ 50 Ohms
Insertion Loss _____ 0.5 dB Max.
Voltage Rating _____ 200 Volts Max.
Operating Temp. Range _____ -65°C to +125°C

Mechanical:


Connectors _____ Passivated Stainless Steel
Mates both Mechanically and Electrically with
SMA, 3.5mm and K* Series Connectors
Conductors _____ Gold Plated Beryllium Copper
Housings: _____ See Below

* K is a Trademark of Anritsu Corp.

Model Number: **8060**

Inner Only


Housings _____ Passivated Stainless Steel
Weight _____ 5.3 Grams Max.

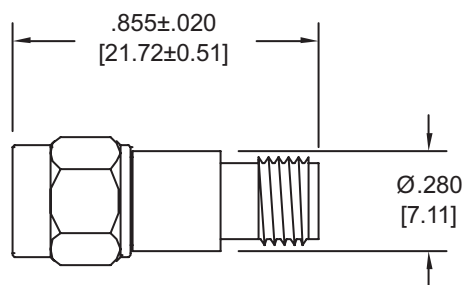

Model Number: **8061**

Outer Only

Housings _____ High Temperature Plastic
Weight _____ 5.5 Grams Max.

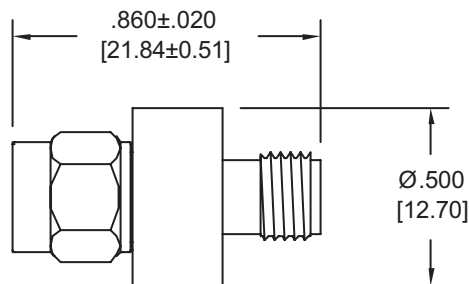

Model Number: **8062**

Inner / Outer

Housings _____ High Temperature Plastic
Weight _____ 5.5 Grams Max.

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8060: REV J



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmetcorp.com • sales@aeroflex-inmetcorp.com