


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

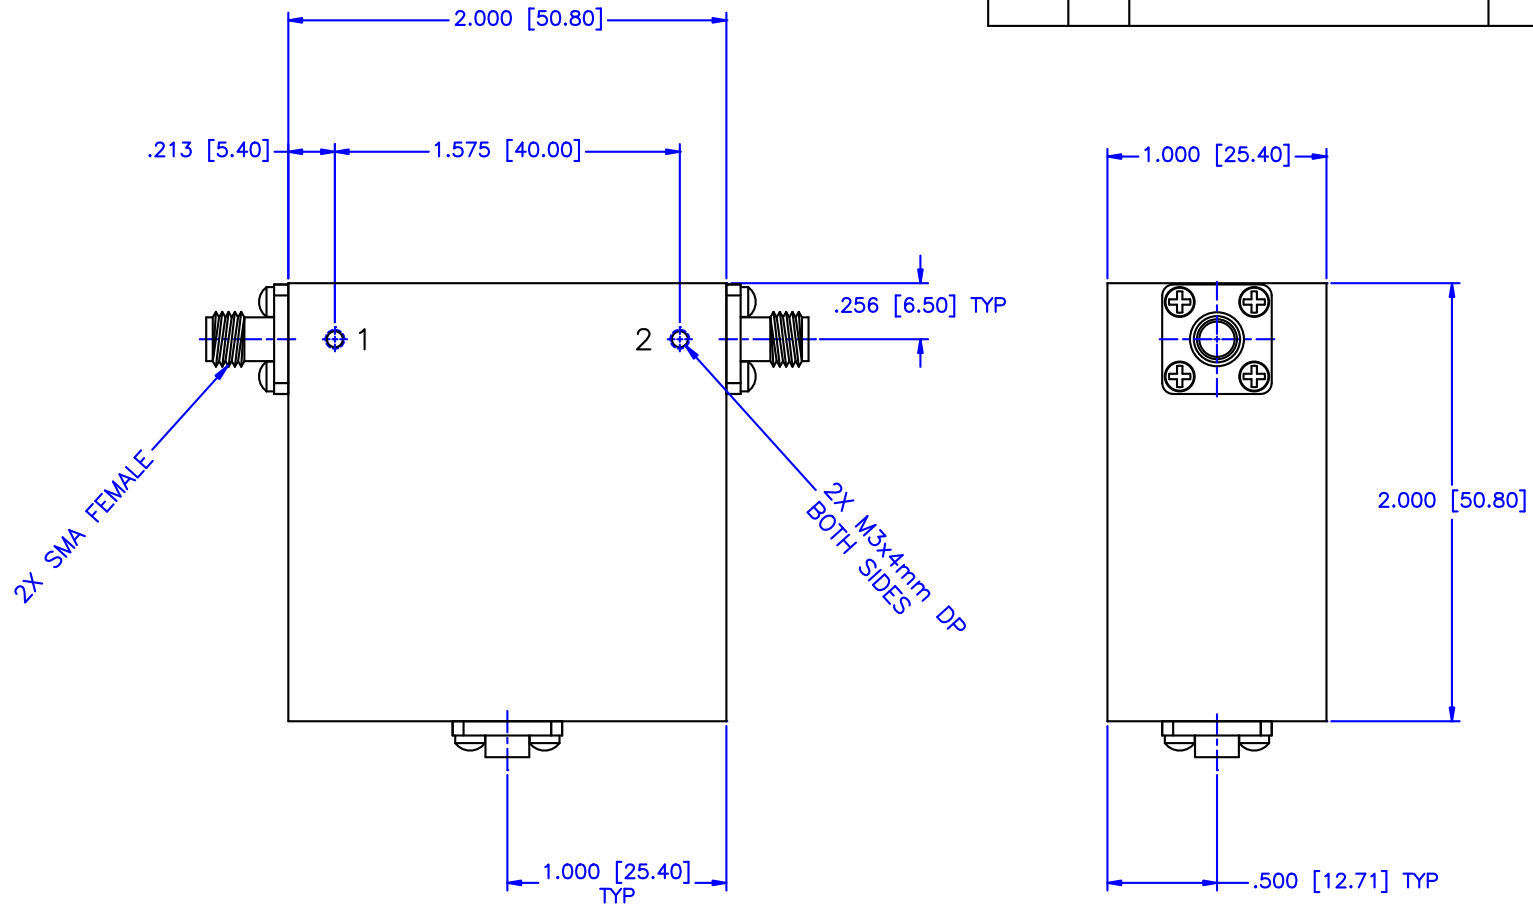

SPECIFICATIONS



Frequency Range: 0.8–1.0 GHz

Isolation: 20dB Min.

Insertion loss: 0.40dB Max.

VSWR: 1.25:1 Max.

Operating Temperature: –54°C to +85°C

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01$ $\pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE: COAXIAL ISOLATOR		PART NO. IS-62		
DRAWN: Paiboon luekhamhan	DATE: 03-13-2008	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 03-13-2008	THIRD ANGLE PROJECTION 	REV: N/A	DWG NO. 83089
			DO NOT SCALE THE DRAWING	