


剥线尺寸
stripping dimension

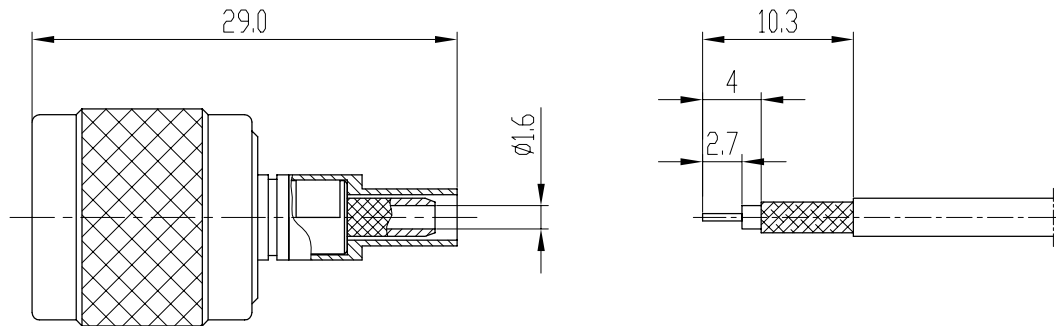

产品型号 type	D	电缆型号 cable type
TNC-J3Y	16	SFF-50-1.5-1、RG316/U SYV-50-2-1、RG179B/U

Electrical Characteristics:

- Characteristic Impedance: 50Ω
- Frequency range: DC~6Ghz
- Contact resistance
Center conductor: $\leq 1.5 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1500V
- VSWR: ≤ 1.5
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50Ω
- 频率范围: DC~6Ghz
- 接触电阻:
中心导体: $\leq 1.5 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

Application: MIL-C-39012/26E


执行标准: MIL-C-39012/26E

Material&Finishing

- Center contact :
Male: brass, gold plated
- Body and other metal parts:
brass, nickel or gold plated
- Insulators: PTFE
- Crimp ferrule: copper, nickel plated
- Gasket: silicone rubber

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体和其它金属零件:
黄铜, 镀镍或镀金
- 绝缘子: 聚四氟乙烯
- 线夹: 黄铜, 镀镍
- 密封圈: 硅橡胶

		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2:1		
		TNC-J3Y		
		RF COAXIAL CONNECTOR		
DRAWN	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
CHECKED				
APPROVED				