


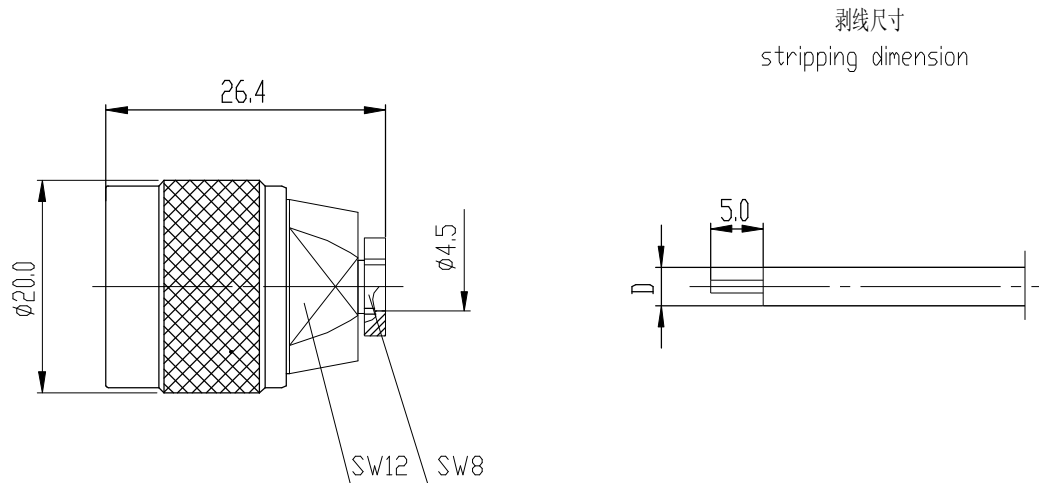

产品型号 type	D	电缆型号 cable type
N-JB3D	φ3.6	SFT-50-3-1、RG402/U

Electrical Characteristics:

1.Characteristic Impedance: 50Ω

2.Frequency range: DC~11Ghz

3.Contact resistance

Center conductor: $\leq 1.0\text{ m}\Omega$

Out conductor: $\leq 0.2\text{ m}\Omega$

4.Insulation resistance: $\geq 5000\text{ M}\Omega$

5.Insulator withstanding:1500V

6.VSWR: ≤ 1.3

7.Durability: 500cycles

Application:MIL-C-39012/1E

Material&Finishing

1.Center contact:

Male:brass,gold plated

2.Bodies:brass,silver plated

Bush:brass,gold plated

3.Insulators:PTFE

4.Gasket:silicone rubber

主要性能指标:

1.特性阻抗: 50Ω

2.频率范围: DC~11Ghz

3.接触电阻:

中心导体: $\leq 1.0\text{ m}\Omega$

外导体: $\leq 0.2\text{ m}\Omega$

4.绝缘电阻: $\geq 5000\text{ M}\Omega$

5.介质耐压:1500V

6.电压驻波比: ≤ 1.3

7.插拔次数: 500次

执行标准:MIL-C-39012/1E

材料和镀层

1.中心接触件:

插针:黄铜,镀金

2.壳体:黄铜,镀银

衬套:黄铜,镀金

3.绝缘子:聚四氟乙烯

4.密封圈:硅橡胶

		SCALE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1.5:1	
NAME		DATE	N-JB3D RF COAXIAL CONNECTOR 西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.
DRAWN			
CHECKED			
APPROVED			