

# Ceramic Balun RF Transformer

50Ω 3300 to 4200 MHz

NCS4-442+



CASE STYLE: GE0805C-1

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

Reel Size Devices/Reel  
7" 20, 50, 100, 200, 500, 1000, 2000

## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input RF Power**	3W

\*\*\* Derate linearly to 2W at 85°C  
Permanent damage may occur if any of these limits are exceeded.

## Pad Connections

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	3
NO CONNECTION	6
NOT USED (GND Externally)	5

Pads 2,3,4 are DC-connected internally

## Features

- wideband, 3300 to 4200 MHz
- low phase unbalance, 5 deg. and amplitude unbalance, 0.4 dB typ.
- miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- low cost
- aqueous washable

## Applications

- WiMAX
- satellite transmitters
- line of sight links

## Electrical Specifications (T<sub>AMB</sub>=25°C)

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE AT SECONDARY† (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
4	3300-4200	1.0	5	0.4

\* Insertion Loss is referenced to mid-band loss, 0.9 dB. Reference Demo Board TB-419+


† Relative to 180°

## Typical Performance Data at 25°C\*\*

FREQUENCY (MHz)	INSERTION LOSS* (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
3300.00	0.03	22.45	0.50	8.83
3400.00	0.01	24.30	0.37	8.15
3500.00	0.00	25.05	0.26	7.29
3600.00	0.02	24.38	0.16	6.24
3700.00	0.04	22.74	0.06	5.06
3800.00	0.07	20.87	0.01	3.96
3900.00	0.12	18.96	0.04	2.68
4000.00	0.16	17.33	0.05	1.41
4100.00	0.21	15.88	0.03	0.16
4200.00	0.28	14.56	0.04	0.85

\*\* Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

## Outline Drawing

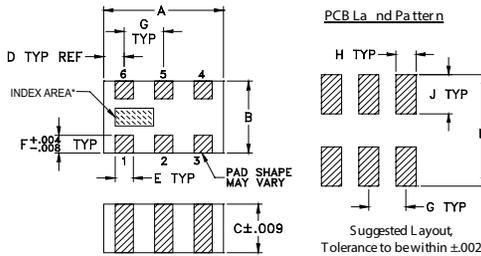


\*Shape of index marking may vary

## Outline Dimensions (inch/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.01	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	

## Demo Board MCL P/N: TB-419+ Suggested PCB Layout (PL-264)

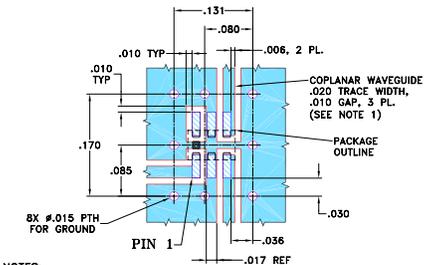

### NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- 




### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.C  
M153508  
NCS4-442+  
ED 12817/34B28  
RS/AM  
151023

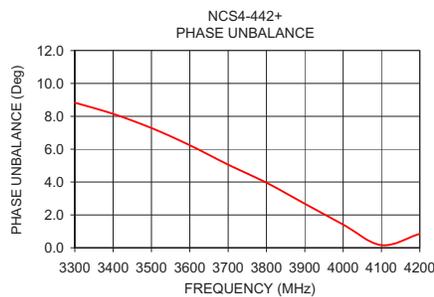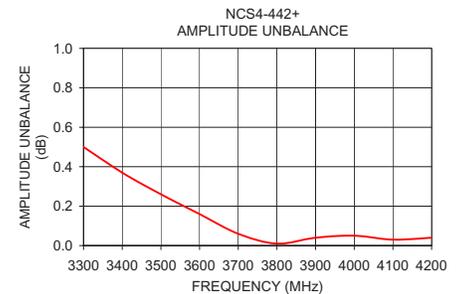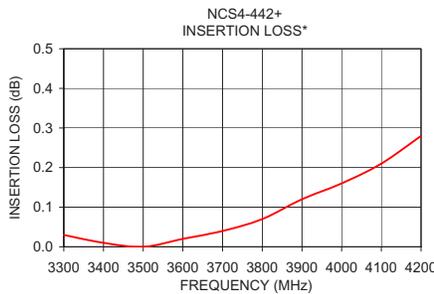

## configuration R

