



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2260 MHz Ceramic Bandpass Filter

Part Number: AM2260B531



Electrical specifications

Center Frequency: 2260 MHz
Bandwidth: Fo +/- 25 MHz
Input / Output Impedance: 50 Ohms
Passband: 2247.5-2272.5 MHz
Passband Insertion Loss: 2.7 dB
Passband Ripple: 0.8 dB
Passband Return Loss: 15 dB min.
Rejection: @ Fo +/- 50 MHz 10 dB min.
Rejection 2: @ Fo +/- 300 MHz 45 dB min.
Power Handling: 1 W

Mechanical

Mounting Method: SMT
Dimensions: 12.73 x 8.47 x 3.7 mm


Environmental

Operating Temperature: -30°C to +75°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

5. DIMENSIONS

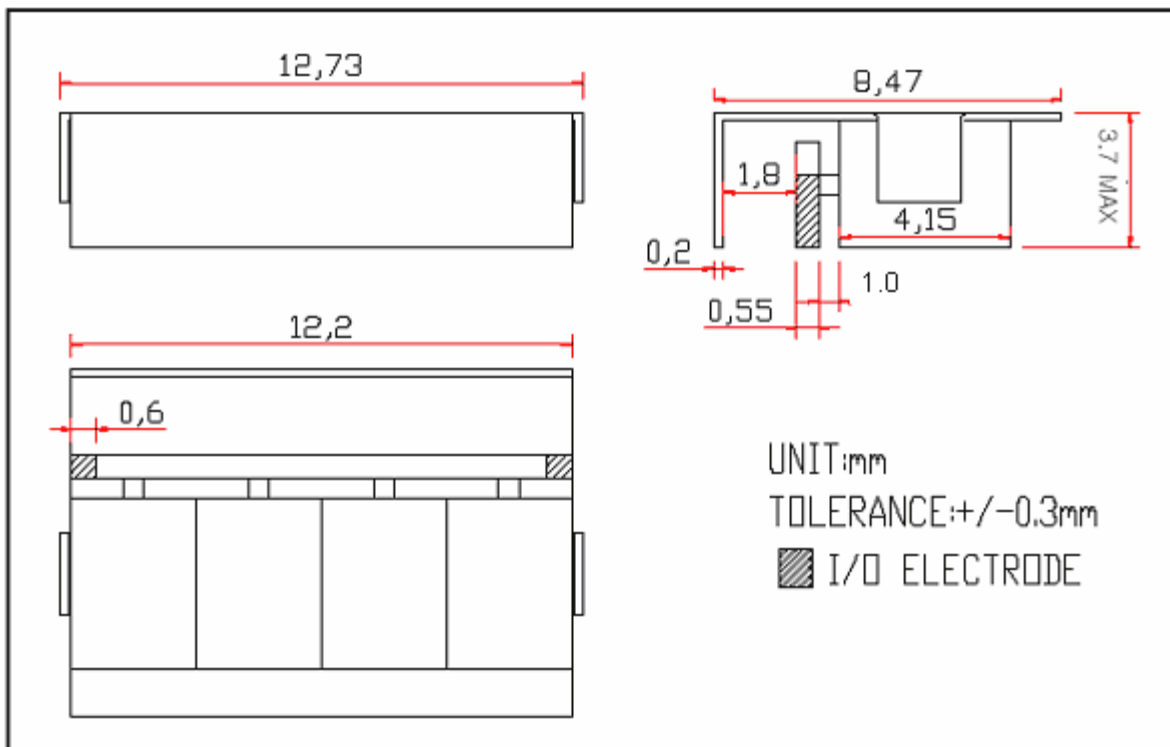



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products


2260 MHz Ceramic Bandpass Filter

Part Number: AM2260B531



3. GRAPHS

S21 LOG MAG NETWORK ANALYZER

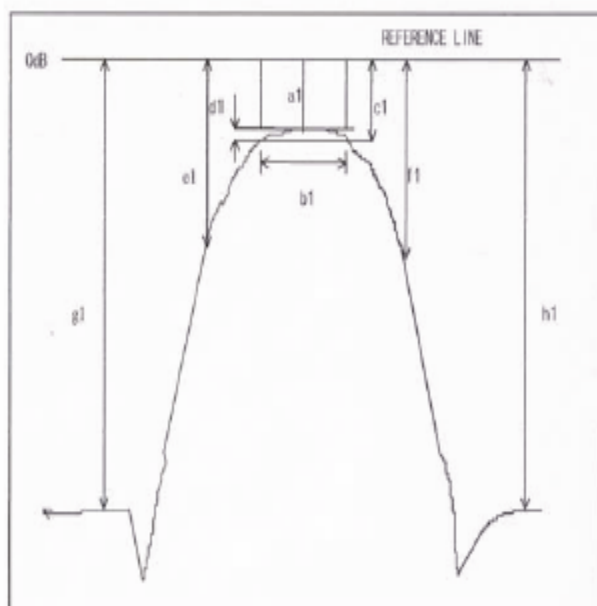

S11 SWR NETWORK ANALYZER

