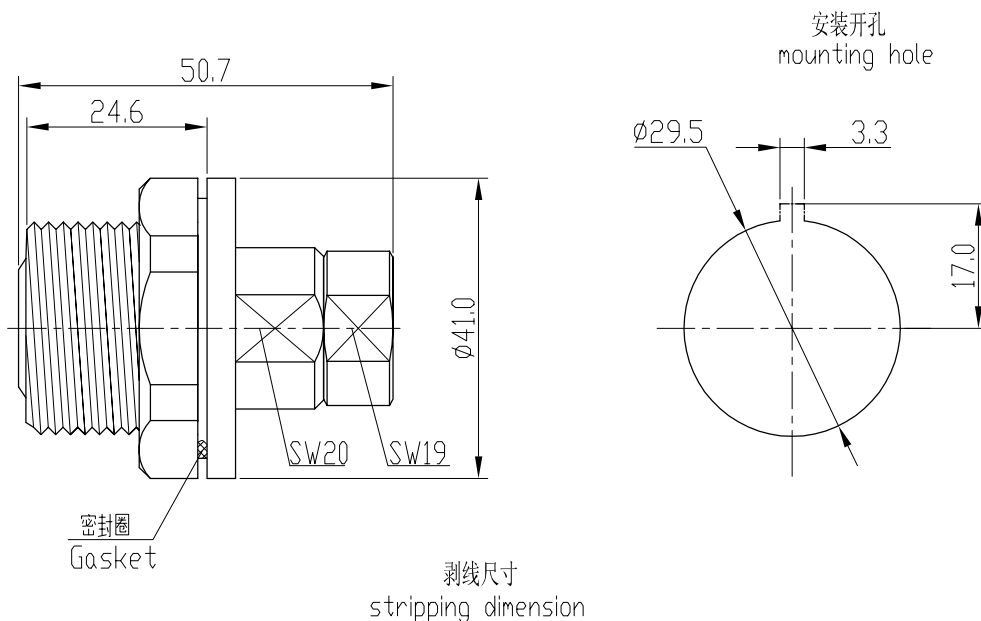


产品型号 type	配接电缆 cable type
L29-KY533	内导体免焊 free solder for center contact

Electrical Characteristics:

- 1.Characteristic Impedance: 50Ω
- 2.Frequency range: DC~6Ghz
- 3.Contact resistance
Center conductor: ≤1.0 mΩ
Out conductor: ≤0.5 mΩ
- 4.Insulation resistance: ≥10000MΩ
- 5.Insulator withstanding:4000V
- 6.VSWR: ≤1.5
- 7.Durability: 500cycles

主要性能指标:

- 1.特性阻抗: 50Ω
- 2.频率范围: DC~6Ghz
- 3.接触电阻:
中心导体: ≤1.0 mΩ
外导体: ≤0.5 mΩ
- 4.绝缘电阻: ≥10000MΩ
- 5.介质耐压:4000V
- 6.电压驻波比:≤1.5
- 7.插拔次数: 500次

Application:IEC 60169-4


执行标准:IEC 60169-4

Material&Finishing

- 1.Center contact :
Female:phosphor bronze, silver plated
- 2.Bodies:brass, silver plated
- 3.Insulators:PTFE

材料和镀层

- 1.中心接触件:
插孔:锡磷青铜, 镀银
- 2.壳体:黄铜, 镀银
- 3.绝缘子:聚四氟乙烯

		SCALE		L29-KY533	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1.5:1			
	NAME	DATE	RF COAXIAL CONNECTOR		
DRAWN					
CHECKED					
APPROVED					
				西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	