


NO.	COMPONENTS	IMPEDANCE
1	SMA FEMALE	50 OHM
2	5007	50 OHM
3	HEAT SHRINKING TUBE	
4	N MALE	50 OHM

# **TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.**

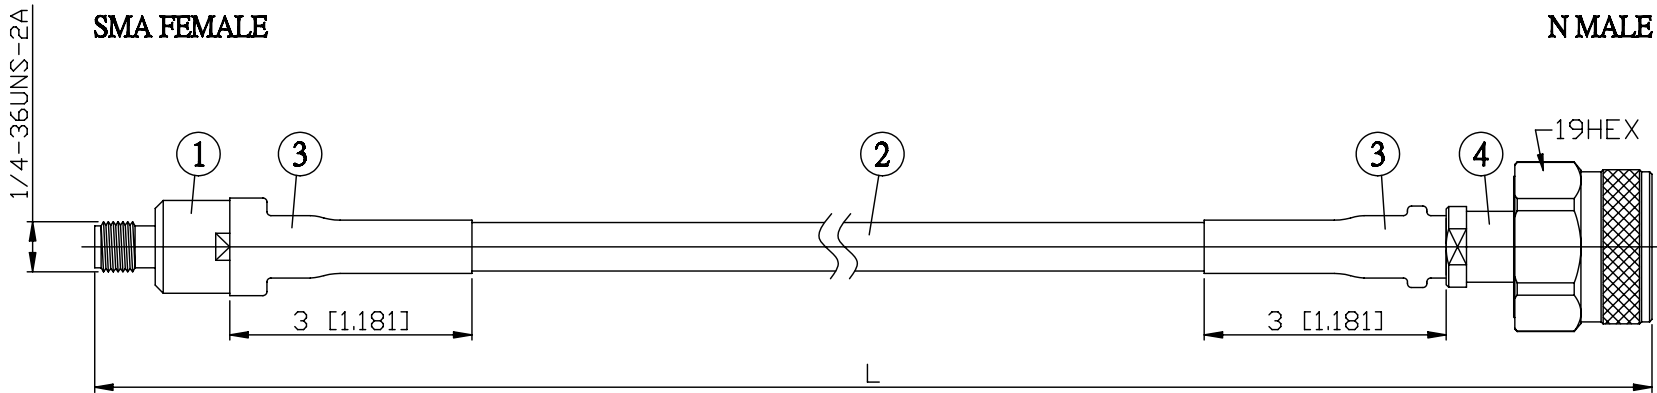

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A80N30-5007-12G50	12.4	-20dB	50 (19.685)
A80N30-5007-12G100			100 (39.370)
A80N30-5007-12G150			150 (59.055)
A80N30-5007-12G200			200 (78.740)
A80N30-5007-12GXXX			CUSTOM LENGTH IN CM

LENGTH TOLERANCE  
IS  $\pm 1.5\%$  OR  $\pm 10\text{MM}$ ,  
WHICHEVER IS  
GREATER.

**JYE BAO CO., LTD.**  
TAIPEI TAIWAN

DESCRIPTION  
CABLE ASSEMBLY SMA JACK TO N PLUG

JYE BAO DRAWING NO.  
A80N30-5007-12GXXX