





Standards
NF C 96-315
MIL-DTL-39030

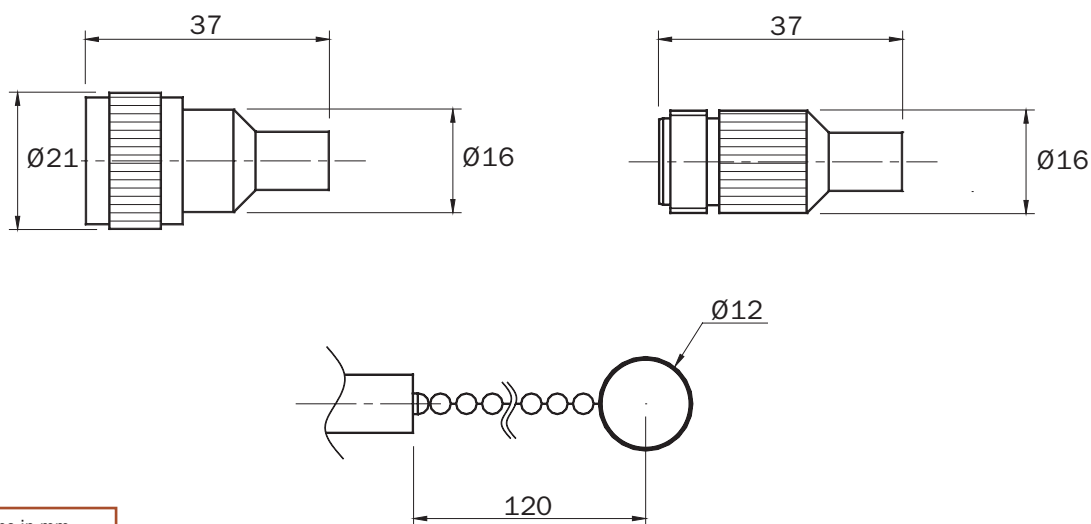

Impedance	$50\ \Omega \pm 2\%$
Frequency	DC – 6 GHz
Max VSWR	≤ 1.20 at 4 GHz, ≤ 1.30 at 6 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	1 W
Weight	45 g



P/N	Connector
17-0046	N m
17-0296*	N m
17-0177	N f
17-0302*	N f

* model with chain