


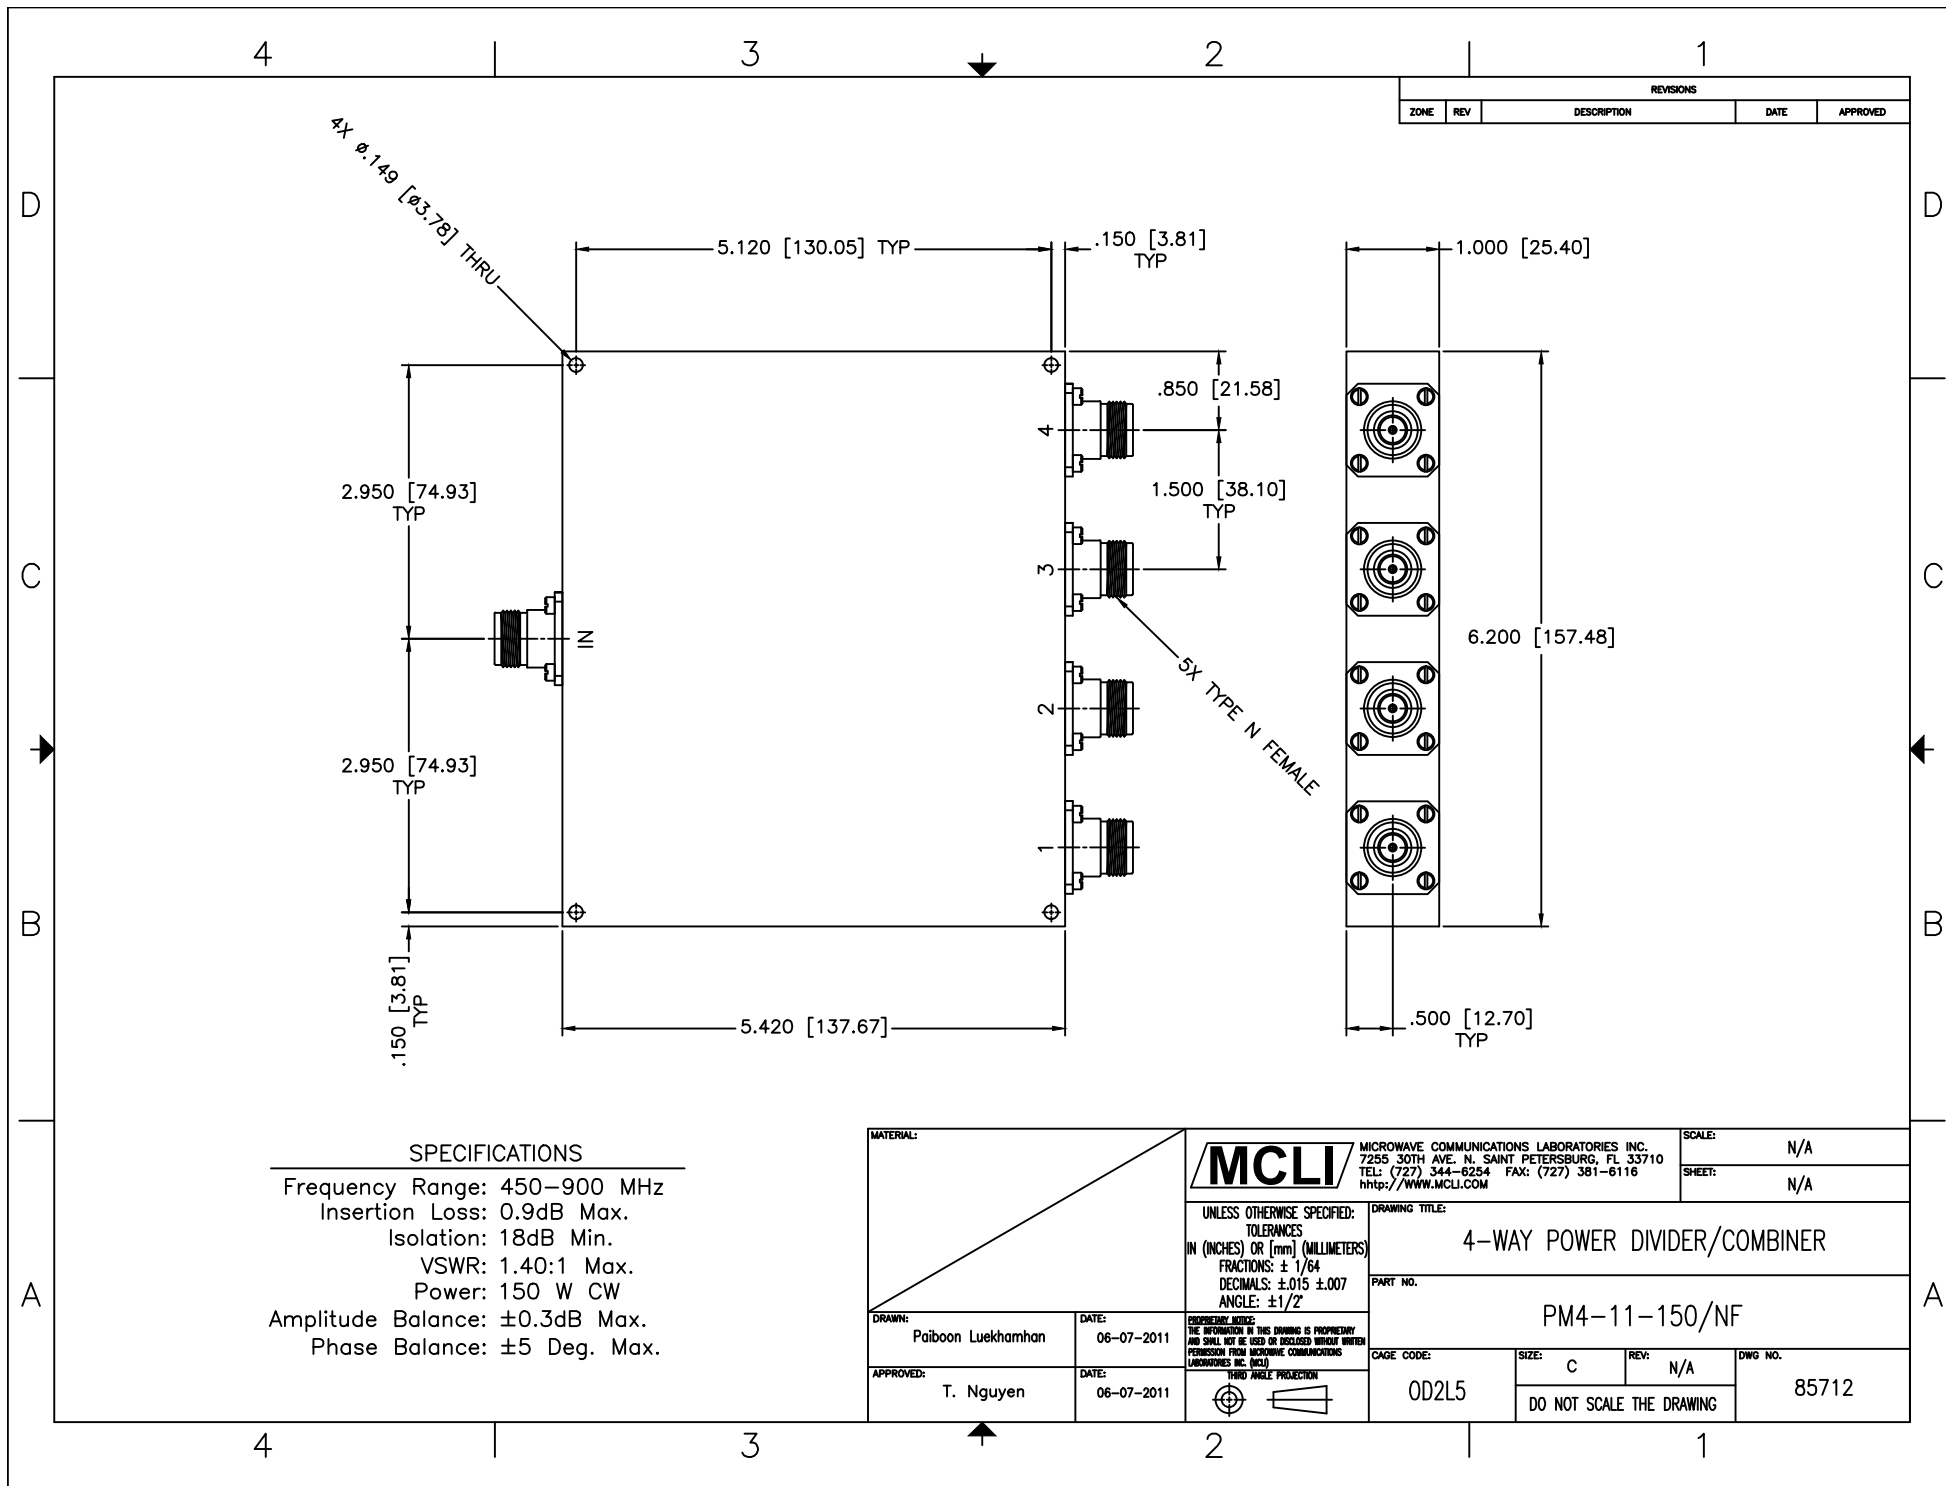

SPECIFICATIONS

Frequency Range: 450–900 MHz
 Insertion Loss: 0.9dB Max.
 Isolation: 18dB Min.
 VSWR: 1.40:1 Max.
 Power: 150 W CW
 Amplitude Balance: ± 0.3 dB Max.
 Phase Balance: ± 5 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.015 \pm 0.007$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 06-07-2011		DRAWING TITLE: 4-WAY POWER DIVIDER/COMBINER PART NO.: PM4-11-150/NF
APPROVED: T. Nguyen		DATE: 06-07-2011		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
		THIRD ANGLE PROJECTION 		
		CAGE CODE: OD2L5	SIZE: C	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO.: 85712