
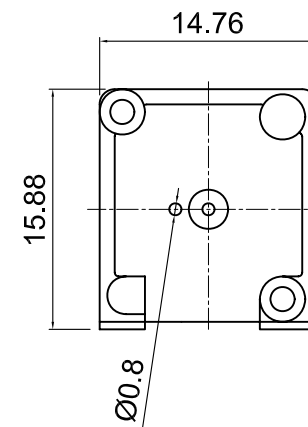
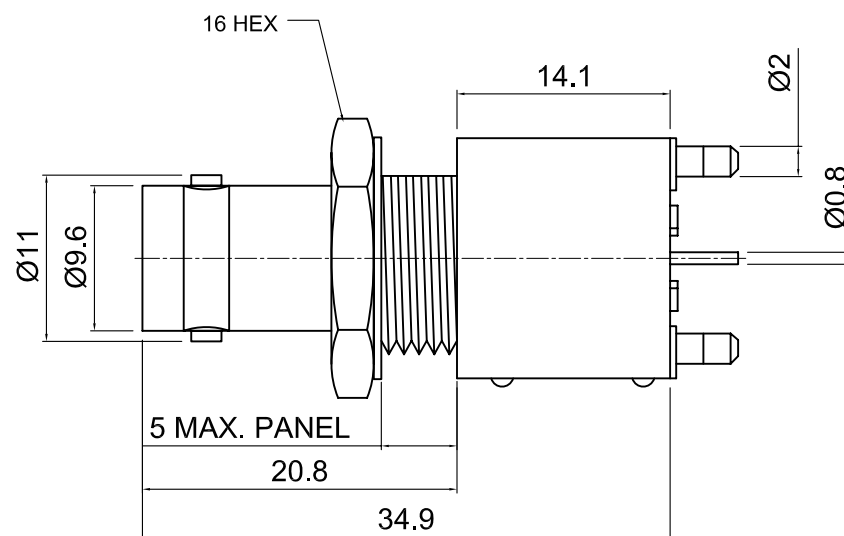


Tolerances
 1-20=+/-0.2
 20-30=+/-0.3
 30-40=+/-0.4
 40-50=+/-0.5
 50-100=+/-0.75
 100-300=+/-1.5
 Angles=+/-1
Dimensions are in Millimeters

Revisions Description/Approved/Date	Approved M.H.	Date
	Checked M.H.	Date
	Drawn T.J.A.	Date

NOTES (plating thickness in micro-inches):
 1. Per QQ-B-626
 2. Per QQ-S-764
 3. Per QQ-C-530
 4. Per QQ-B-750
 5. Per MIL-P-19468
 6. Per ZZ-R-765
 7. Per WW-T-799
 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
 9. Nickel pl. 100 min. over copper strike
 10. Per QQ-P-35
 11. Gold pl. 3 min. over nickel pl. 50 min. over copper strike

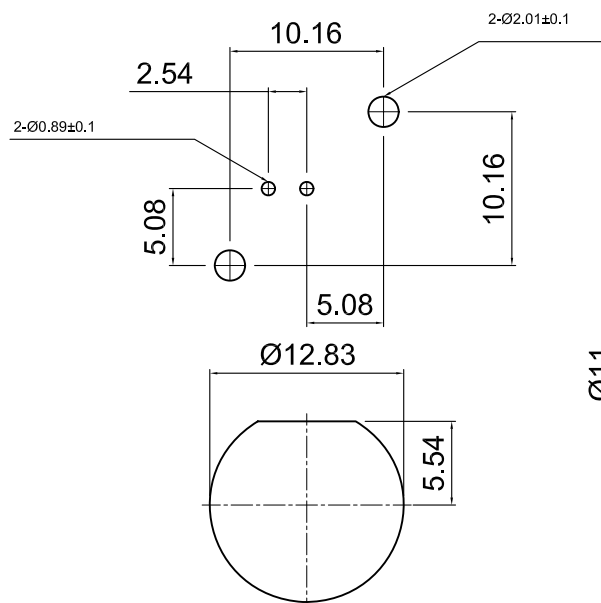

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-BSF54HNPM		
Connector Body	Zinc Alloy	Nickel, Note 9			
Center Contact: Female	P. Bronze	Gold, Note 11			
Insulation	Polypropylene	None			
Ferrule	--	--			
Gasket	--	None			
Hex Nut	Brass, Note 1	Nickel, Note 9			
Lock Washer	Brass	Nickel, Note 9			
			Description BNC PCB vertical thru hole jack. Nickel plated zinc alloy casing.		
			Polypropylene dielectric. 50 Ohm part.		
			Scale 2:1	Drawing No. BSF54HNPM	File Name BSF54HNPM