




Absorptive 1-18.0GHz Coaxial SPST Switch

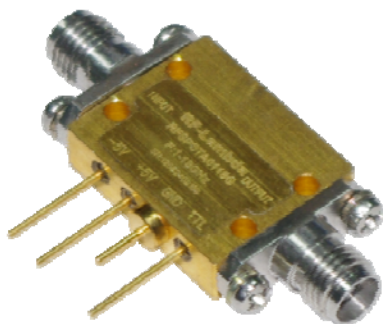

Features

- Wide Band Operation 1.0-18.0GHz
- High Power Handle Capability up to 5W upon request.
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -40°C~+85°C
- Customization available upon request

Specification	Absorptive type		
	PN: RFSPSTA0118G		
	Low	Med	High
Frequency Range(GHz)	1	9.5	18
Insertion Loss(dB)	2.0dB typ. @1GHz	2.5dB typ. @9.5GHz	3.0dB typ. @18GHz
VSWR	1.8	1.8	2
Isolation(dB)	70	70	60
Switching Speed(ns)	50	100	150
IIP3 Power (dBm)	60	60	60
max. Power (W)			1
Weight (g)	15		
IIP3 (Input IP3) dBm	42.92		
Impedance(Ohms)	50Ω		
Power Supply (V)	+/-5 V DC		
Current(mA)	50mA (+5V) 30mA (-5V)		
Input Connector	SMA-Female		
Output Connector	SMA-Female		
Finishing	Gold Plating		
Material	Brass		
Seal	Hermetically Sealed		
Control (TTL Driver Included)	TTL Control		
	TTL	Status	
	0	OFF	
	1	ON	



RF-LAMBDA

The power beyond expectations

RFSPSTA0118G

Absolute Maximum Ratings	
Biasing	+/-5 V
TTL Control Voltage	+5V/oV
Input RF power	30dBm
Storage Temperature (C°)	-50 ~ +125


Biasing Up Procedure	
Step 1	-5V
Step 2	+5V
Step 3	TTL
Power OFF Procedure	
Step 1	+5V
Step 2	-5V
Step 3	TTL

Environment specifications	
Operational Temperature (C°)	-45 ~ +85
Storage Temperature (C°)	-50 ~ +125
Altitude	30,000 ft (Controlled environment)
Vibration	15g rms (15 degree 2KHz)
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msc

Ordering Information		
Part No	ECCN	Description
RFSPSTA0118G	EAR99	SPST 1-18GHz PIN Diode Switch



Median Lifetime (Tm) vs. Channel Temperature (Tch)

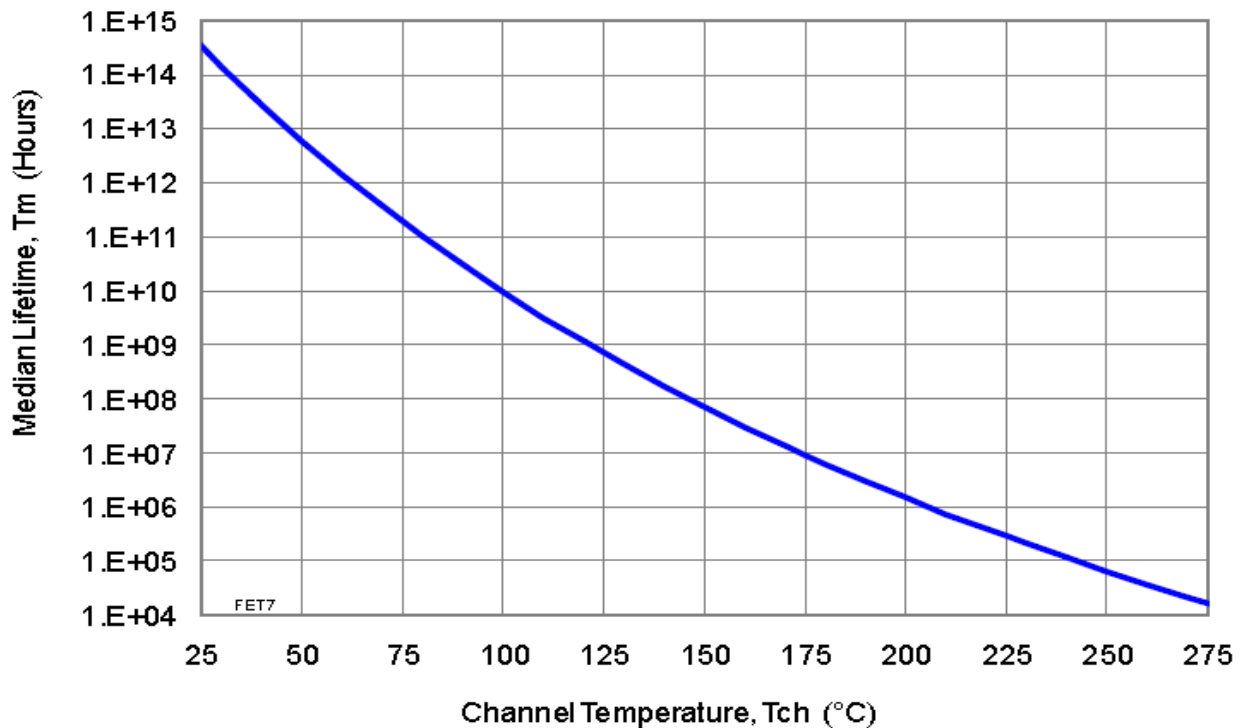

Absorptive Coaxial Single Pole Single Throw Switch 1-18.0GHz



RF-LAMBDA

The power beyond expectations

RFSPSTA0118G

Absorptive Coaxial Single Pole Single Throw Switch 1-18.0GHz

