



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)577-9887
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com


MODEL 5800795-001
700-2700 MHz
30 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 5800795-001 is a 30 Watt broadband full module amplifier that covers the 700-2700MHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5800795-001 comes with an extended multiyear warranty.

	Parameter	Specification @ 25° C
Electrical		
1	Frequency Range	700-2700 MHz
2	Saturated Output Power	30 Watts rated
3	Power Output @ 1dB Comp.	25 Watts min
4	Small Signal Gain	+47 dB min
5	Gain Flatness	± 1.5 dB max
6	IP ₃	+53 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 20 Watts
9	Spurious Signals	< -60 dBc typical @ 20 Watts
10	Input/Output Impedance	50 Ohms nominal
11	DC Input Current	21 Amps max
12	DC Input	13 VDC nominal
13	RF Input	+10 dBm Max. (0dBm input for full rated power)
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
Mechanical		
16	Dimensions	9.8" x 16.0" x 4.1"
17	Weight	30 lb. max
18	Connectors	SMA female
19	Grounding	Chassis
20	Cooling	Adequate Heatsink Required
Environmental		
21	Baseplate Temperature	0° C to +50°C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

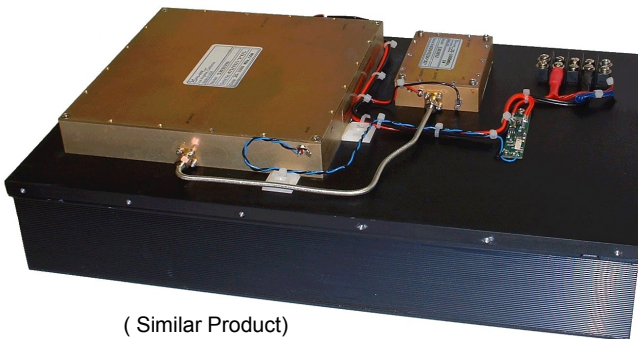

(Similar Product)

FEATURES

- ◇ Heatsink and Fans
- ◇ Disable Control
- ◇ Shut Down Options:
 1. +5V on, Open/GND off.
 2. GND off, Open on.

Specifications subject to change without notice.