




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

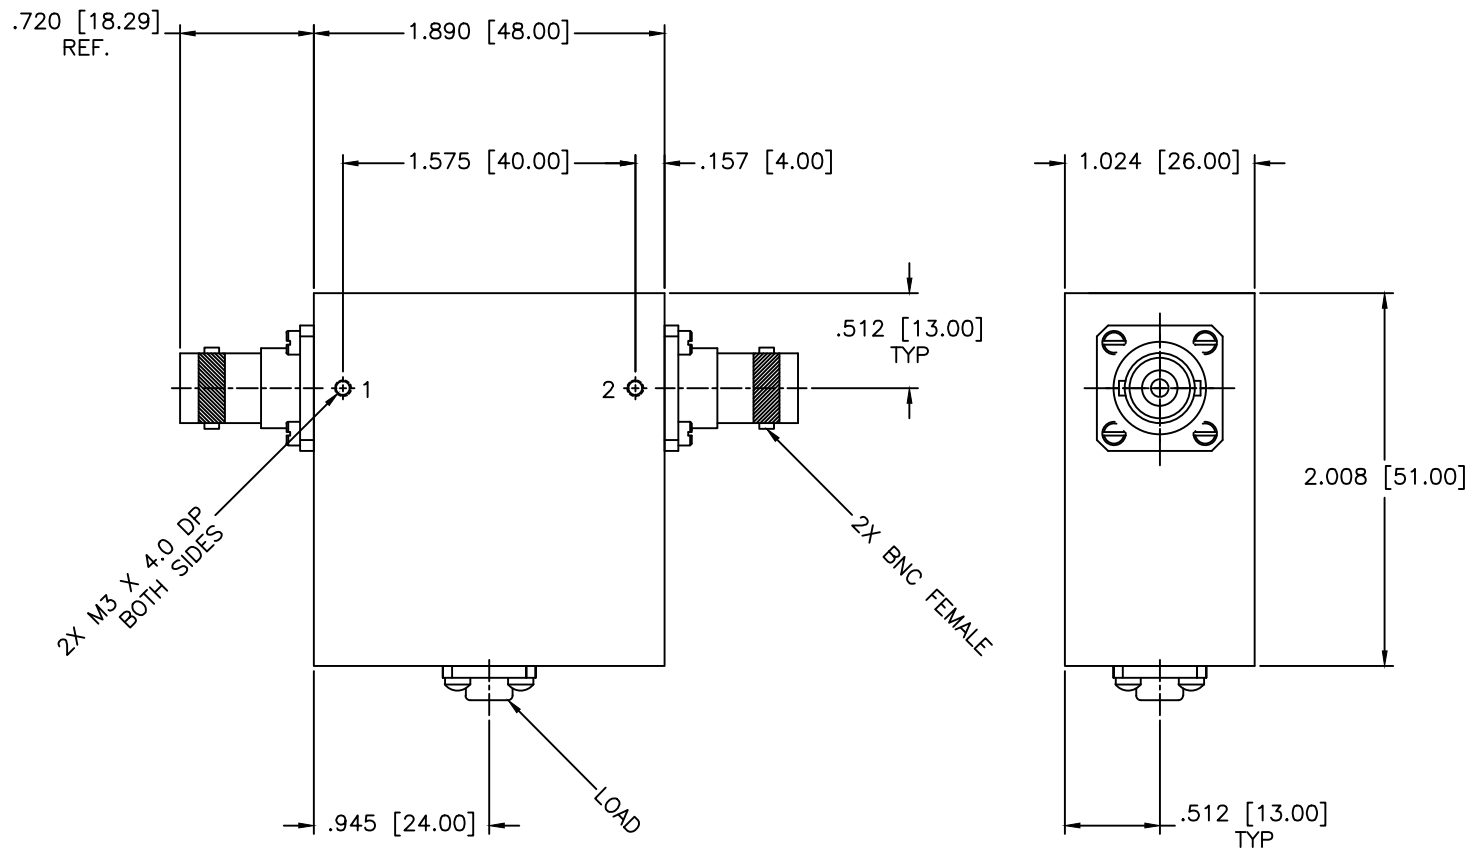

SPECIFICATIONS

Frequency Range: 400–520 MHz
Isolation: 17dB Min.
Insertion loss: 0.80dB Max.
VSWR: 1.38:1 Max.
Operating Temperature: 0°C to +50°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
DRAWN: Paiboon Luekhamhan DATE: 10-06-2011		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
		DRAWING TITLE: COAXIAL ISOLATOR		
APPROVED: T. Nguyen DATE: 10-06-2011		PART NO. IS-166/BF		
		CAGE CODE: 0D2L5	SIZE: A DO NOT SCALE THE DRAWING	DWG NO. 86420

