


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	5003	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA FEMALE FOR BULKHEAD	50 OHM


TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

SMA MALE
RIGHT ANGLE

SMA FEMALE
FOR BULKHEAD

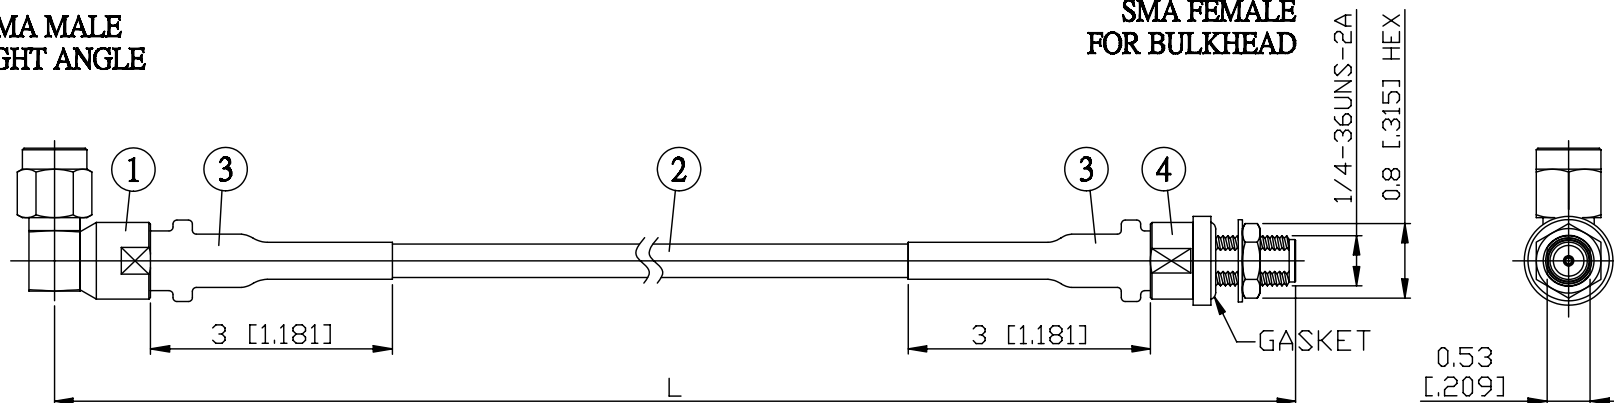

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A39A85-5003-12G50	12.4	-18dB	50 (19.685)
A39A85-5003-12G100			100 (39.370)
A39A85-5003-12G150			150 (59.055)
A39A85-5003-12G200			200 (78.740)
A39A85-5003-12GXXX			CUSTOM LENGTH IN CM



MOUNTING HOLE

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD.	
	TAIPEI TAIWAN	
	DESCRIPTION	CABLE ASSEMBLY SMA PLUG R/A TO SMA FEMALE FOR BULKHEAD
	JYE BAO DRAWING NO.	A39A85-5003-12GXXX