

Voltage Controlled Oscillator

ROS-2170-1319+

Linear Tuning 1730 to 2170 MHz



CASE STYLE: CK605
PRICE: \$ 15.95 ea. QTY (5-49)

Features

- linear tuning characteristics
- low phase noise
- low pushing
- aqueous washable

Applications

- wireless communications
- base station
- WCDMA
- UMTS

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)		Typ.	Typ.			Typ.	Typ.
ROS-2170-1319+	1730	2170	+7.2	-76	-103	-124	-144	0.5	12	55-59	50	30	-90	-17	-	4	0.3	12	34

Pin Connections


RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	13V
Absolute Max. Tuning Voltage (Vtune)	14V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

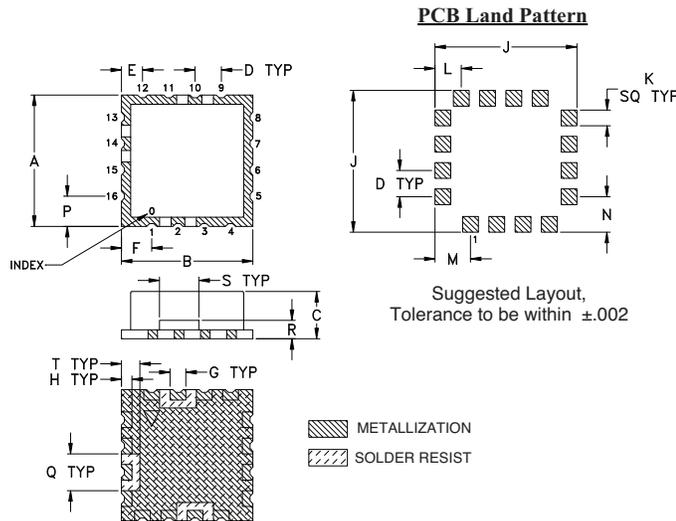

Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.







REV. OR
M125394
EDR-9497F1
ROS-2170-1319+
RAV
120920
Page 1 of 2

Performance Data & Curves*

ROS-2170-1319+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1950 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	75.46	1603.6	1588.3	1576.7	6.98	6.74	6.45	28.66	-13.7	-28.2	-30.9	0.16	1.46	-75.9	-103.9	-125.2	-145.0	1.0	-76.47
0.50	65.07	1640.1	1626.0	1615.4	6.97	6.75	6.49	28.67	-13.6	-28.4	-30.4	0.26	3.41	-76.4	-104.2	-125.3	-145.2	2.0	-86.36
1.00	61.37	1672.2	1658.6	1648.6	7.05	6.78	6.49	28.69	-13.5	-28.5	-30.3	0.30	1.69	-75.3	-104.5	-125.4	-145.4	3.5	-93.14
2.00	58.88	1733.1	1719.2	1708.9	7.11	6.90	6.65	28.69	-13.9	-26.9	-30.5	0.34	2.85	-76.7	-104.2	-125.3	-145.2	6.0	-98.72
2.50	58.29	1762.6	1748.7	1738.4	7.12	6.88	6.64	28.70	-14.1	-26.1	-30.7	0.34	2.79	-76.0	-104.4	-125.3	-145.3	8.5	-102.05
3.00	58.56	1792.0	1777.8	1767.3	7.26	7.00	6.70	28.70	-14.4	-25.2	-30.7	0.34	3.82	-77.3	-104.1	-125.2	-145.1	10.0	-103.56
3.50	58.64	1821.6	1807.1	1796.3	7.23	7.04	6.80	28.70	-14.7	-24.6	-30.8	0.34	2.82	-76.6	-103.8	-125.1	-145.0	20.8	-110.58
4.00	57.98	1851.0	1836.4	1825.5	7.24	7.04	6.82	28.71	-14.9	-24.0	-30.6	0.33	4.07	-75.5	-103.8	-124.9	-144.9	35.5	-115.36
5.00	58.13	1909.3	1894.3	1883.0	7.37	7.21	6.95	28.70	-15.7	-23.4	-30.9	0.31	3.43	-75.6	-103.8	-124.7	-144.6	60.7	-119.91
5.50	57.60	1938.5	1923.3	1911.8	7.35	7.19	7.00	28.70	-16.0	-23.2	-31.1	0.30	4.03	-76.1	-103.8	-124.6	-144.5	86.7	-123.31
6.00	56.68	1967.4	1952.1	1940.6	7.39	7.22	6.99	28.70	-16.4	-23.0	-31.4	0.29	3.85	-76.8	-103.5	-124.5	-144.5	100.0	-124.56
6.50	57.02	1995.9	1980.5	1969.0	7.47	7.28	7.03	28.69	-17.1	-22.9	-31.4	0.29	4.34	-76.6	-103.3	-124.5	-144.6	148.1	-127.93
7.00	57.46	2025.0	2009.0	1997.1	7.47	7.34	7.13	28.66	-17.5	-22.6	-30.9	0.30	4.07	-74.7	-102.6	-124.0	-144.0	177.0	-129.54
8.00	56.22	2081.6	2065.7	2053.9	7.54	7.42	7.17	28.65	-18.9	-22.8	-30.9	0.28	4.66	-75.0	-102.7	-124.0	-143.9	211.6	-131.04
8.50	56.91	2110.0	2093.8	2081.7	7.57	7.47	7.23	28.62	-19.5	-22.8	-30.5	0.28	4.22	-75.3	-102.5	-123.7	-143.7	302.4	-134.19
9.00	56.25	2138.6	2122.2	2109.8	7.55	7.47	7.27	28.60	-20.2	-22.9	-30.2	0.28	4.45	-75.1	-102.2	-123.3	-143.3	361.5	-135.66
9.50	55.23	2166.5	2150.3	2138.2	7.58	7.47	7.25	28.59	-21.0	-23.1	-30.1	0.26	5.06	-75.0	-102.1	-123.3	-143.4	507.5	-138.67
10.00	55.88	2194.5	2178.0	2165.9	7.62	7.51	7.28	28.56	-21.5	-23.2	-29.8	0.25	4.63	-75.4	-102.1	-123.1	-143.2	606.7	-140.16
11.00	54.56	2250.4	2233.9	2221.5	7.62	7.57	7.33	28.51	-23.1	-23.5	-29.8	0.21	4.46	-75.1	-101.7	-122.7	-142.8	851.6	-143.06
12.00	53.98	2304.7	2288.1	2276.0	7.64	7.47	7.27	28.44	-24.1	-24.1	-30.7	0.15	5.46	-73.5	-101.1	-122.4	-142.6	1000.0	-144.49

*at 25°C unless mentioned otherwise

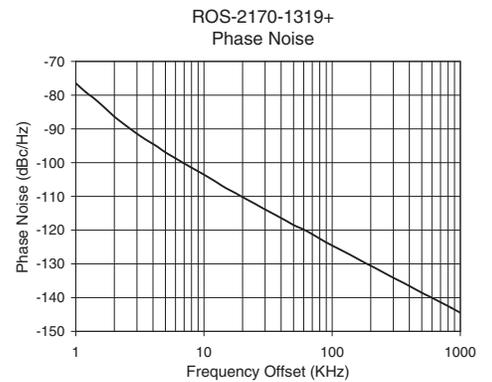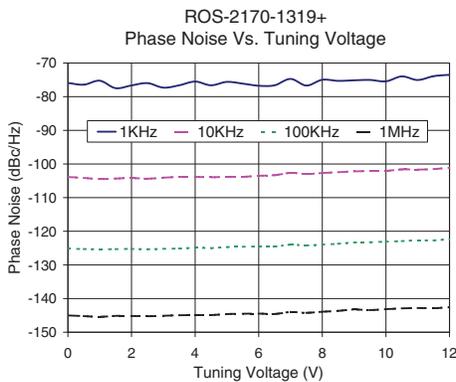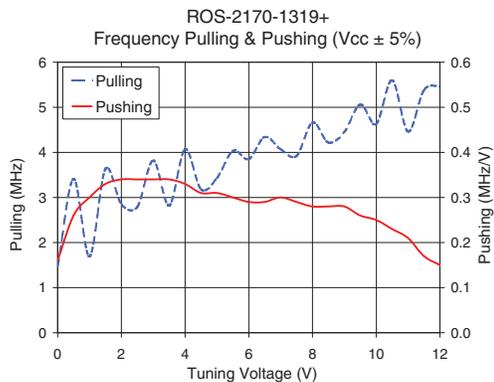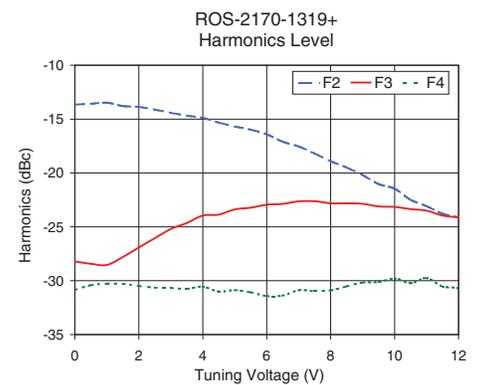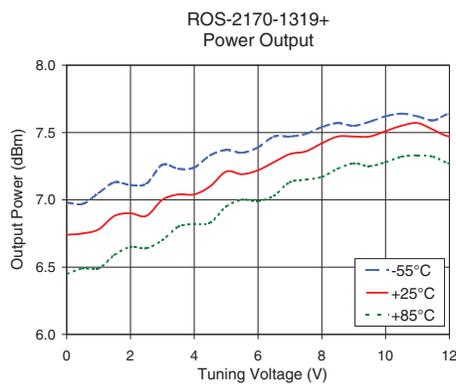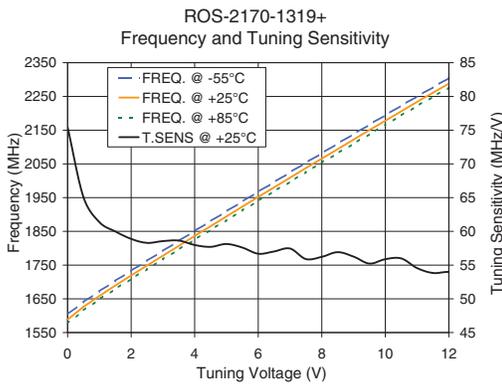

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.