


FAT-BHM7BHF7T4G2W6

**4GHz BNC HDTV Plug To
BNC HDTV Jack Fixed Attenuator 75Ω**

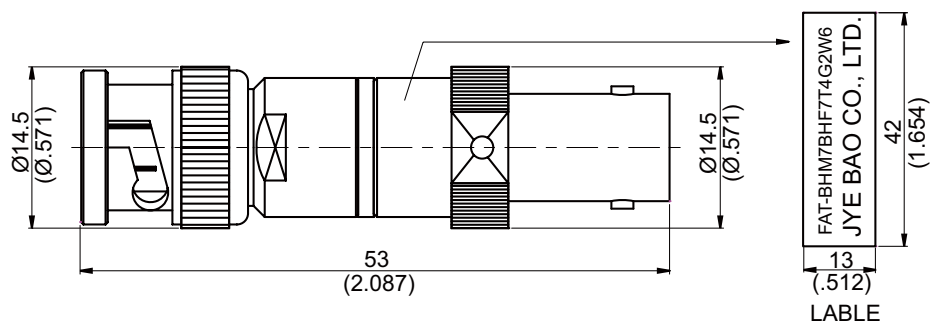

Nominal impedance: 75Ω $\pm$ 0.25Ω .

Frequency range: DC to 4GHz.

VSWR deviation: $\pm$ 0.1% over operating temperature range.

Rated Power: 250 mW

Operating Temp Range: -55 to 120°C.

Attenuation	VSWR	Attenuation deviation ($\pm$ -dB)	
	DC-4GHz	DC-2GHz	2-4GHz
6dB	$\leq$ 1.3	$\pm$ 0.3dB	$\pm$ 0.5dB

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Ferrule	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin(Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin(Jack)	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicon	
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.