



Standards
NF C 96-315
MIL-DTL-39030

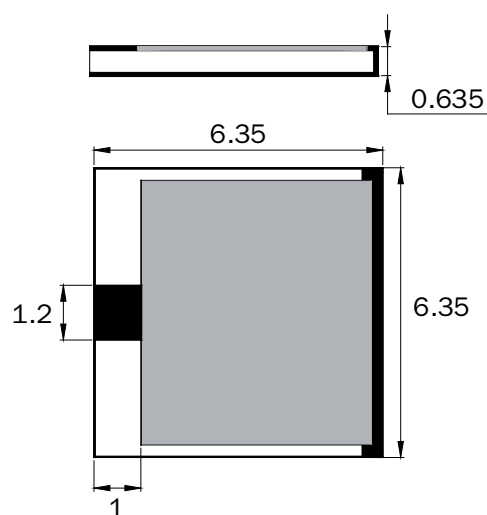

Substrate
Resistive film
Protection film
Contacts finition

AIN
Thick film
Epoxy
Silver over Nickel barrier

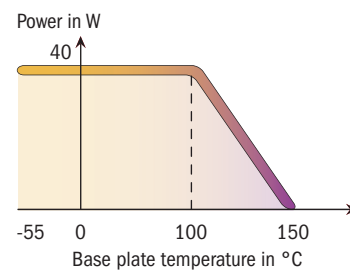

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
45-0030Y	9	40	50	1.20

mm	inch
0.635	0.025
1	0.039
1.2	0.047
6.35	0.250



Available on Tap and Reel Packaging

