

1.1 FREQUENCY RANGE: DC-11 GHz
VSWR < 1.02 + .022*F TYPICAL

1.3 NOMINAL IMPEDANCE: 50 OHMS

1.4 DWV: 1500V RMS @ 60Hz (sea level)

1.5 TEMPERATURE RANGE: -65°C TO $+165^{\circ}\text{C}$

2.1 DIELECTRIC: PTFE

2.3 ALL OTHER METAL PARTS: BRASS

3.1 CENTER CONTACT: SEE TABLE

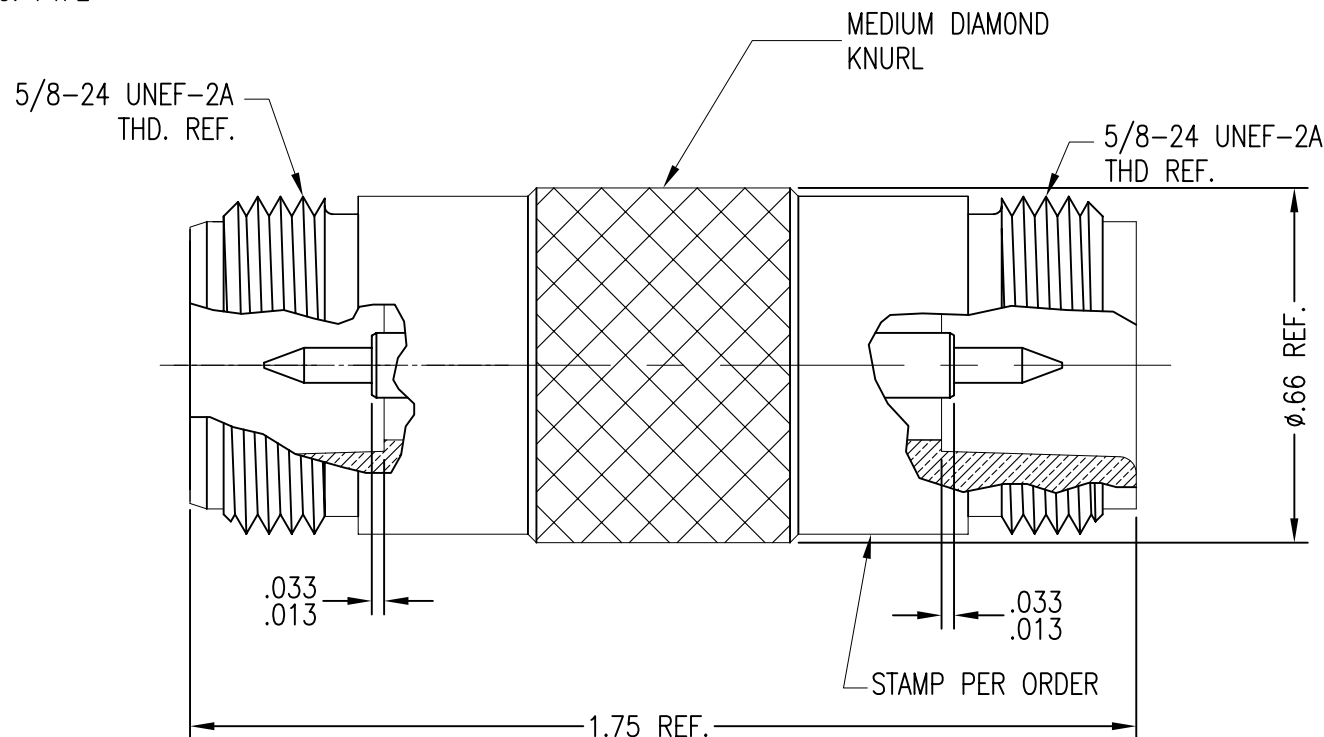
3.2 ALL OTHER METAL PARTS: SEE TABLE

4.0 MECHANICAL

4.1 INTERFACE REFERENCE MIL-STD-348 EXCEPT POLARITY

DWG NO.		REV.
OL-0410-36-1		A
PLATING VARIATIONS		
PART NUMBER	BODY	CONTACT
0410-36-NJ	NICKEL	GOLD/N

PLATING PER SAN-TRON SPEC. 7.3.1-8

[illegible]