



Standards
NF C 96-315
MIL-DTL-39030

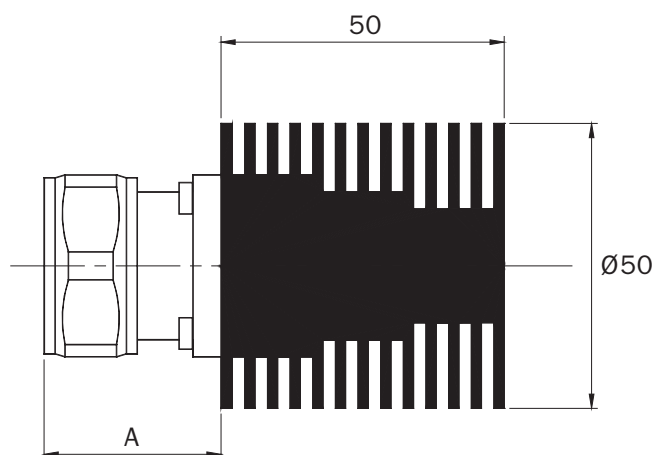

Impedance	$50 \Omega \pm 2\%$
Frequency	DC - 4 GHz
Max VSWR	≤ 1.10 at 2 GHz, ≤ 1.20 at 4 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	25 W
Peak power	5 kW
Weight	300 g



Dimensions in mm

P/N	Connector	A
17-0191	7-16 m	31
17-0256	7-16 f	22

Option	IP 68
--------	-------