


SPECIFICATION:

Frequency Range: 14.0 to 14.5 GHz
 Insertion Loss ABS: 2.60dB Max.
 Insertion Loss REF: 2.40dB Max.
 VSWR: 2.00:1 Max.

REVISIONS

ZONE	REV	DESCRIPTION	Date	APPROVED

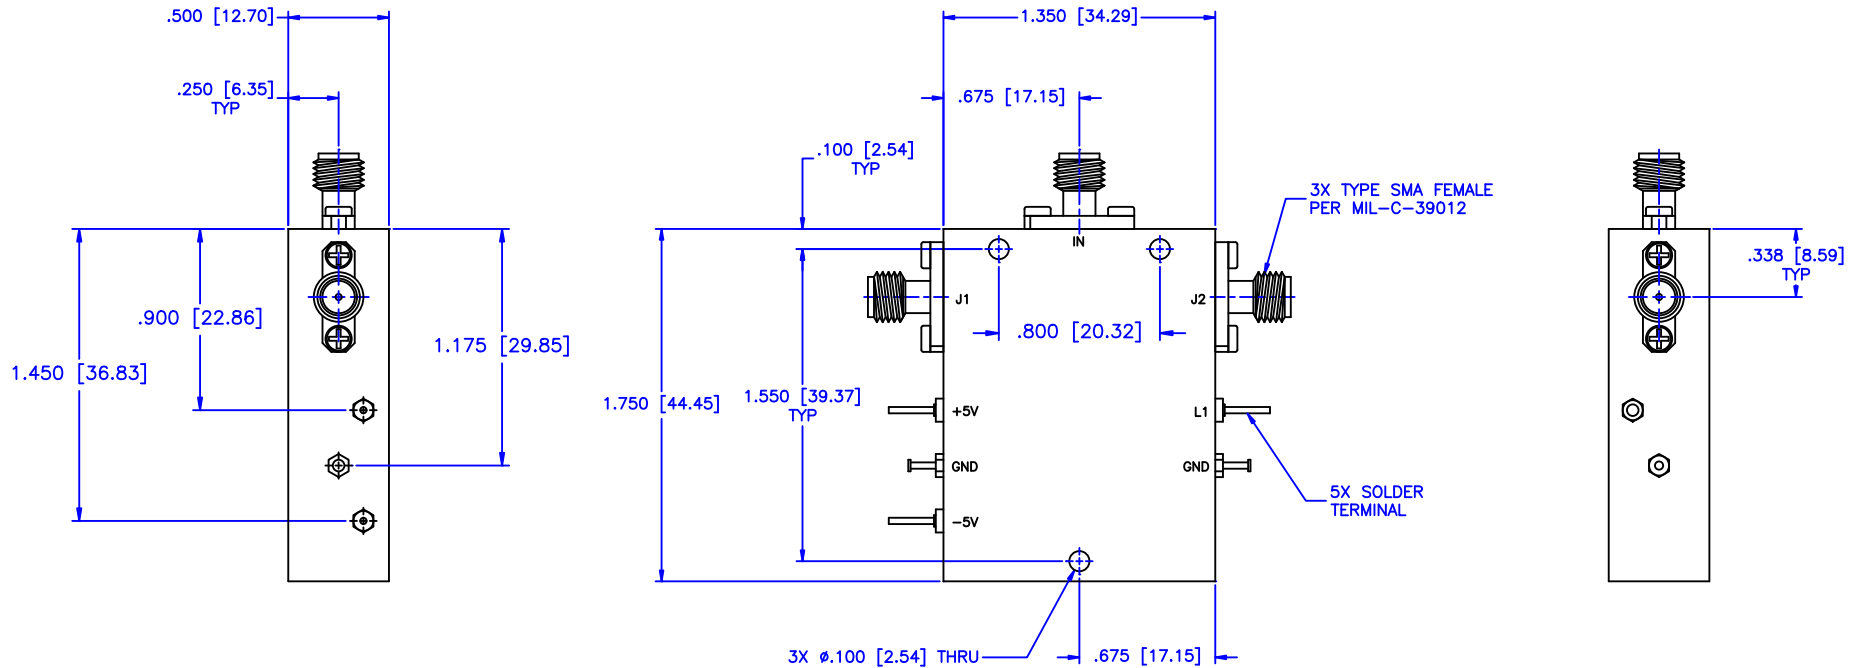

GENERAL INFORMATION

Isolation: 60 db Min.
 Switching Speed: 100nsec Max.
 Power Supply: +5v @ 50ma
 -5v @ 50ma

TTL Control

- 1 J1 to J2 Loss Loss
 J1 to J3 Isolation
- 0 J1 to J2 Isolation
 J1 to J3 Insertion Loss

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 02-03-2009		DRAWING TITLE: PIN DIODE SWITCHES
APPROVED: T. Nguyen		DATE: 02-03-2009		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. D2-17
		THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5 SIZE: A REV: N/A DO NOT SCALE THE DRAWING
				DWG NO. 84118