



RF-LAMBDA


The power beyond expectations

RFLT3W2G04G



Wide Band Power Divider


- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner *
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E -16400
- High power handling capability
- * 2W maximum input when work as combiner.

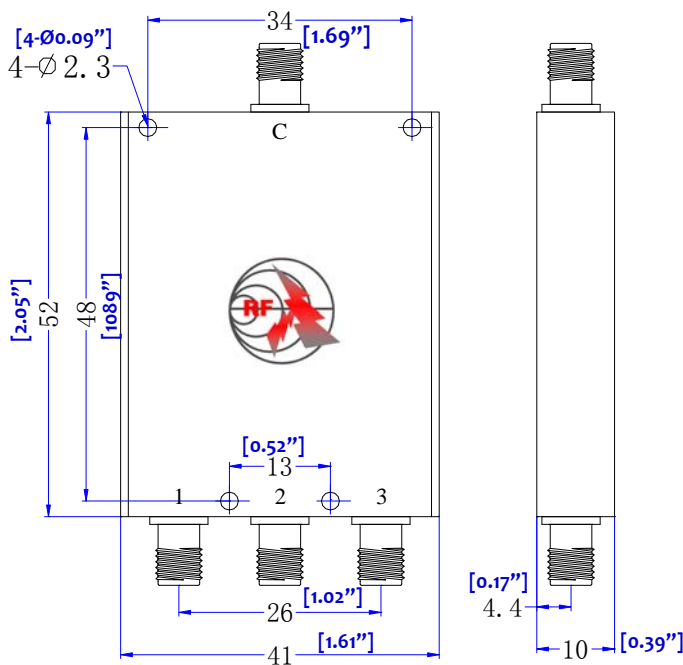

2GHz-4GHz 3-Way Power Divider

Electrical Specifications:

Center Frequency Range:	2GHz-4GHz
Insertion Loss:	0.6dB
Amplitude Unbalance:	± 0.3dB
Phase unbalance:	5 degree
Isolation:	20dB
Input VSWR:	1.3
Output VSWR:	1.3
Temp. Range:	-10°C~+70°C
Forward Power Handling:	20W (CW)
Reverse Power Handling:	2W (CW)
Connector:	SMA-F
Finishing:	Gray Paint and Epoxy cover

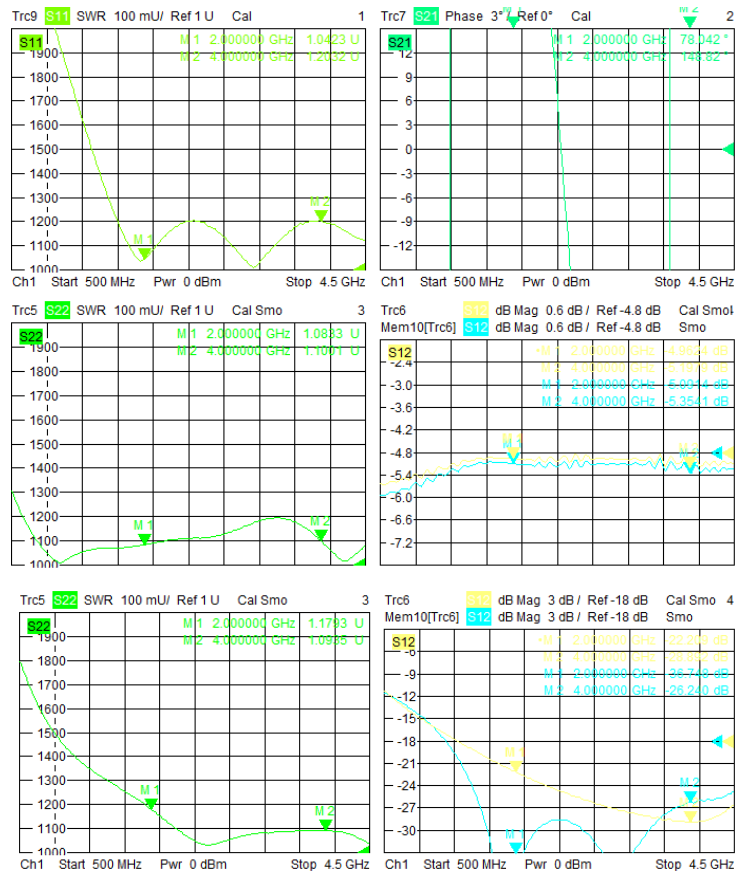

2GHz-4GHz 3-Way Power Divider