

SMP-F EDGE LAUNCH FULL DETENTE

.092" BRD

SC5386

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-40 GHZ
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: BeCu
CENTER CONTACTS: BeCu
PLATING: Au PER MIL-G-45204
INSULATOR: PTFE
INTERFACE: SMP DESC 94007
OP. TEMP RANGE: -55° to +155°C
ROHS COMPLIANT

FORCE TO ENGAGE: 15.0 LBS MAX
FORCE TO DISENGAGE: 5.0 LBS MIN

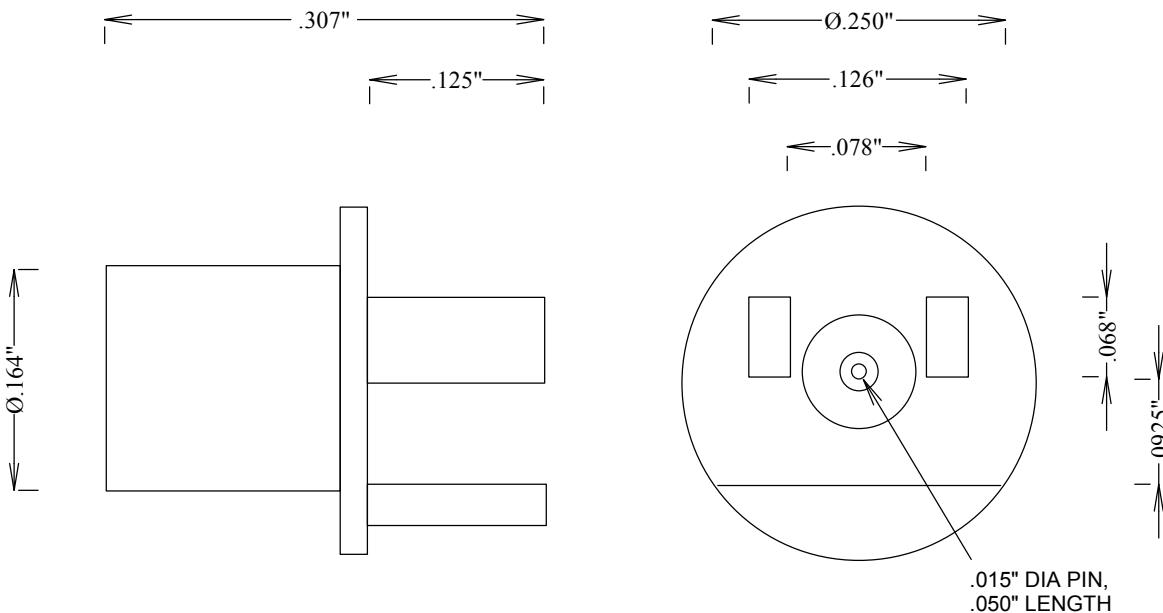

		FAIRVIEW MICROWAVE INC.	
		ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	
		TITLE	
		SMP-F EDGE LAUNCH FULL DETENTE .092" BRD	
SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC5386	--
SCALE		SHEET	