

SMA/F RG174, RG316 CRIMP CONNECTOR

SC7078

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-6 GHZ
VSWR 1.3:1 MAX
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: Au PLATED BRASS
CENTER CONTACT: BeCu
CONTACT PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON
INTERFACE: MIL-STD-348A

OPERATING TEMP RANGE: -55°C- +165°C

ROHS COMPLIANT

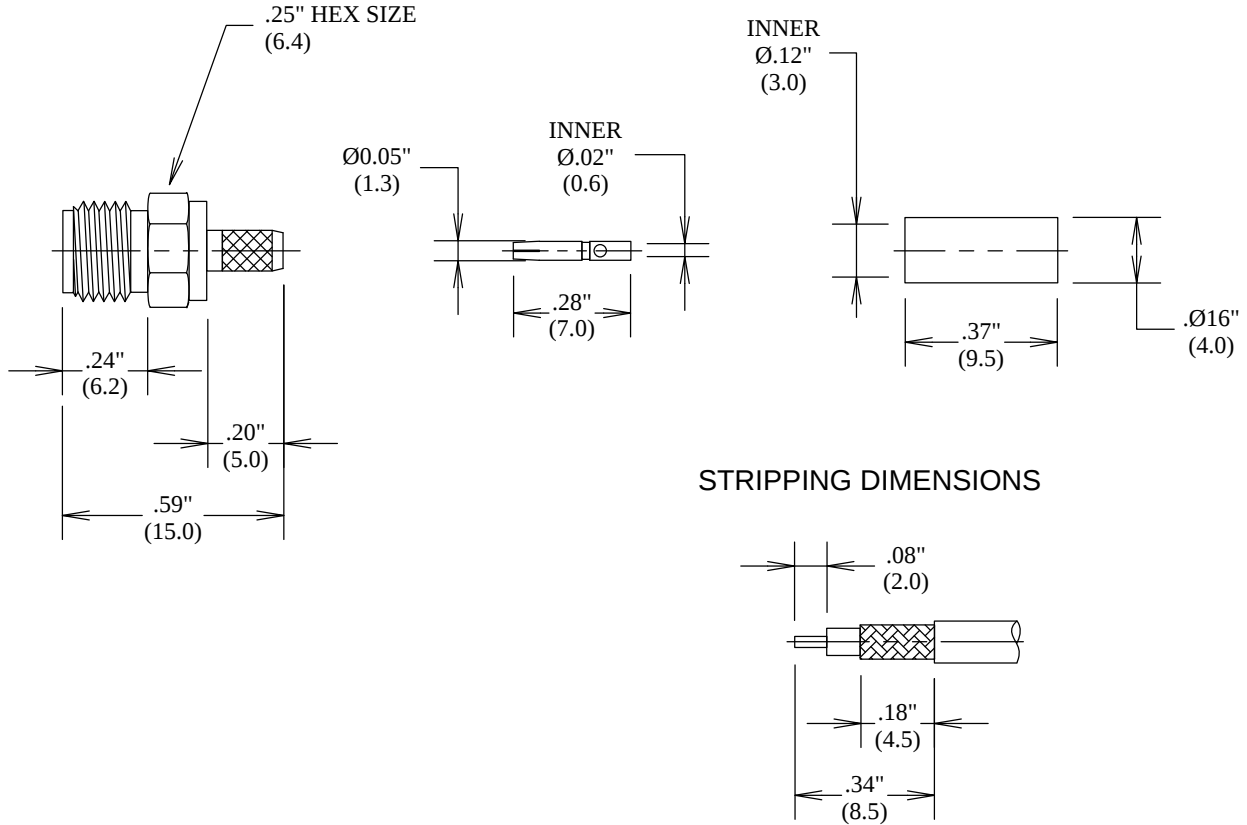

STRIPPING DIMENSIONS

FAIRVIEW MICROWAVE INC.				
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM				
TITLE				
SMA/F RG174, RG316 CRIMP CONNECTOR				
SIZE	CAGE CODE	DWG NO		REV
A	3FKR5	SC7078		--
SCALE			SHEET	