


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

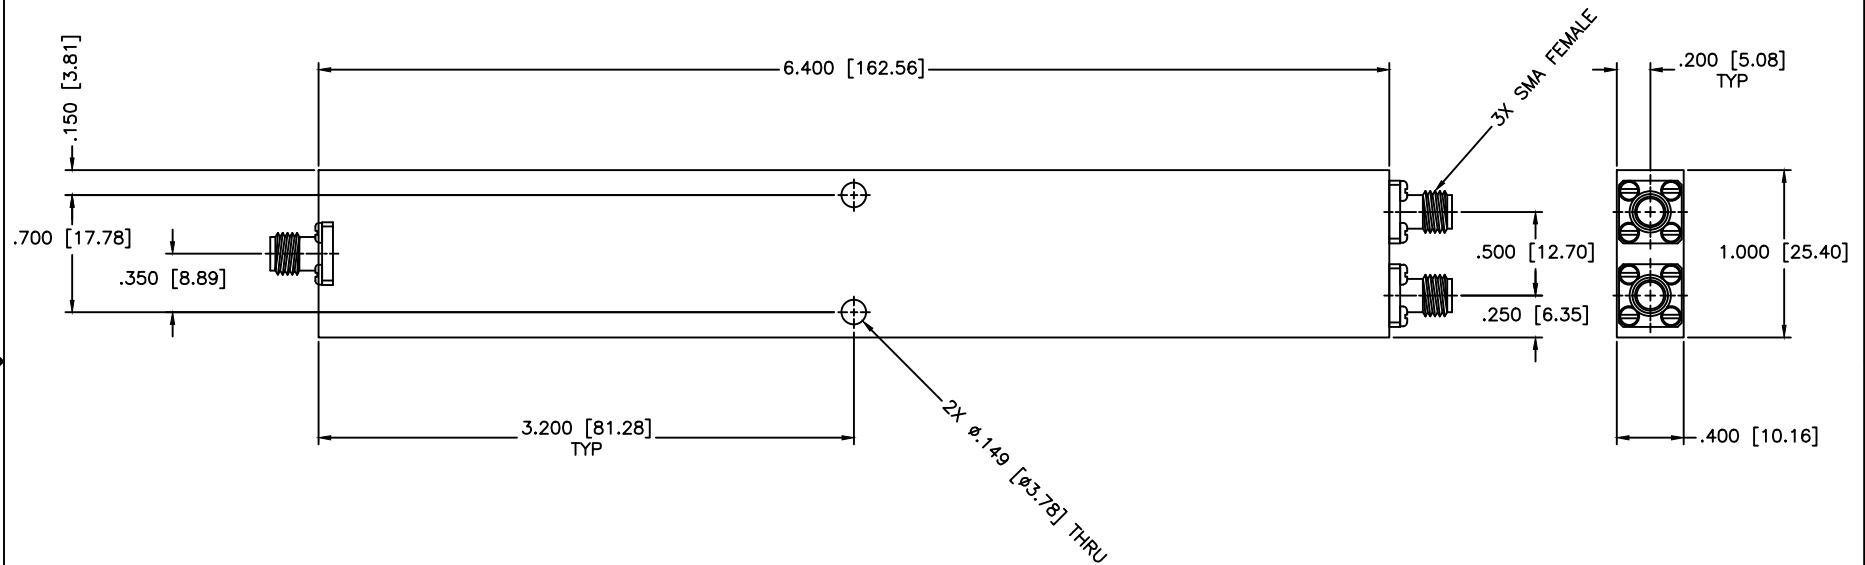

SPECIFICATIONS

Frequency Range: 0.5–26.5 GHz
 Insertion Loss: 1.7dB Max.
 Isolation: 14dB Min.
 VSWR In/Out: 1.70:1/1.60:1 Max.
 Phase Balance: ± 12 Deg. Max.
 Amplitude Balance: ± 0.5 dB Max.
 Power: 10W (Load vswr@1.2)

MATERIAL: DRAWN: Paiboon Luekhamhan DATE: 09-14-1999 APPROVED: T. Nguyen DATE: 09-14-1999		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$ THIRD ANGLE PROJECTION		SCALE: N/A	
				SHEET: N/A	
DRAWING TITLE: 2-WAY POWER DIVIDER PART NO. PS2-15		CAGE CODE: OD2L5		SIZE: N/A	REV: N/A
				DO NOT SCALE THE DRAWING	
				DWG. NO. 80057	