


DWG. NO.

REV



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL



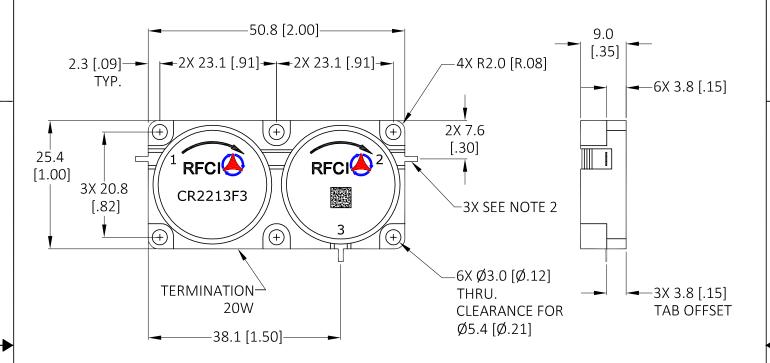

Specifications

Parameter		Minimum	Typical	Maximum	
Frequency Range (MHz)		806		870	
Insertion Loss (dB)	P1-P2 P2-P3		< .40 < .20	0.60 0.30	
Isolation (dB)	P2-P1 P3-P2	45 22	> 55 > 25		
Return Loss (dB)		22	> 25		
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)			75		

Power & Temperature Ratings

Maximum		
1000/200 Watts		
200 Watts		
-40 to +85° C		
-40 to +95° C		

NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2213F3

THIRD ANGLE PROJECTION	1					
APPROVALS	DATE		K	- (;		
DRAWN BY: HV	04/19/13					
CHECKED BY: P.T	04/20/13					
DESIGN BY: P.T	04/01/13		OUTLINE/CDECC			
ENGINEER BY: P.T	04/01/13	OUTLINE/SPECS				
L.T	4/21/13	SIZE	SIZE CAGE NO DWG NO		REV.	
) A			1050 00	1
PROG. MGMT/MKT		ζ		Un22	1353-03	ı.
		SCALI	E: FULL		SHEET 1	OF 1
	DRAWN BY: HV CHECKED BY: P.T DESIGN BY: P.T ENGINEER BY: P.T MEG. ENGR	DRAWN BY: HV 04/19/13 CHECKED BY: P.T 04/20/13 DESIGN BY: P.T 04/01/13 ENGINEER BY: P.T 04/01/13 MFG. ENGR. L.T 4/21/13 O.A.	DRAWN BY: HV 04/19/13 CHECKED BY: P.T 04/20/13 DESIGN BY: P.T 04/01/13 ENGINEER BY: P.T 04/01/13 MFG. ENGR. L.T 4/21/13 Q.A. PROG. MGMT/MKT HV 04/19/13 O4/20/13 SIZE	DRAWN BY: HV 04/19/13 CHECKED BY: P.T 04/20/13 DESIGN BY: P.T 04/01/13 ENGINEER BY: P.T 04/01/13 MFG. ENGR. L.T 4/21/13 Q.A. PROG. MGMT/MKT HV 04/19/13 O4/19/13 O4/	DRAWN BY: HV 04/19/13 CHECKED BY: P.T 04/20/13 DESIGN BY: P.T 04/01/13 ENGINEER BY: P.T 04/01/13 MFG. ENGR. L.T 4/21/13 Q.A. PROG. MGMT/MKT DRAWN BY: HV 04/19/13 O4/20/13 OUTLINE/ SIZE CAGE NO. DWG NO. CR22	DRAWN BY: HV 04/19/13 CHECKED BY: P.T 04/20/13 DESIGN BY: P.T 04/01/13 ENGINEER BY: P.T 04/01/13 MFG, ENGR. L.T 4/21/13 Q.A. PROG, MGMT/MKT A OUTLINE/SPECS DWG NO. CR2213F3-OS