

ATTENUATORS TNC

UP TO 4 GHz
200 WATTS

api
technologies corp.
> INMET

MODELS: XT200W-XX, XT200W-XXF, XT200W-XXM

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 4 GHz
Standard Freq. Values _____ 2.5 & 4 GHz
Standard dB Values _____ 3, 6, 10, 20, 30 & 40 dB
Attenuation Accuracy DC-1.5 GHz 1.5-2.5GHz 2.5-4GHz
3 & 6 dB _____ ±0.50 dB _____ ±0.50 dB _____ ±0.75 dB
10, 20, 30 & 40 dB _____ ±0.75 dB _____ ±1.0 dB _____ ±1.5 dB
Input VSWR (Max.)
3, 6, 10 & 20 dB _____ 1.15:1 _____ 1.25:1 _____ 1.35:1
30 & 40 dB _____ 1.15:1 _____ 1.25:1 _____ 1.50:1
Input Power _____ 200 Watts Avg. @ +25°C
Derated Linearly to 40 Watts @ +125°C
Peak Power _____ 2 kW Max.
(5uSec Pulse, .05% Duty Cycle)
Impedance _____ 50 Ohms
Operating Temp. Range _____ -54°C to +125°C

Mechanical:

TNC Connectors** _____ Passivated Stainless Steel
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper
Housing _____ Anodized Aluminum

Note: Units are unidirectional.
Units must be positioned in such
a way as to allow free air flow
around fins to assure performance.

** TNC Connectors are 18 GHz Mode Free.

Model Number: **XT200W-XX**


Male/Female Connectors
Length: 8.52 ±.10 [216.41 ±2.54]
Pictured

Model Number: **XT200W-XXF**

Female/Female Connectors
Length: 8.62 ±.10 [218.95 ±2.54]

Model Number: **XT200W-XXM**

Male/Male Connectors
Length: 8.42 ±.10 [213.87 ±2.54]

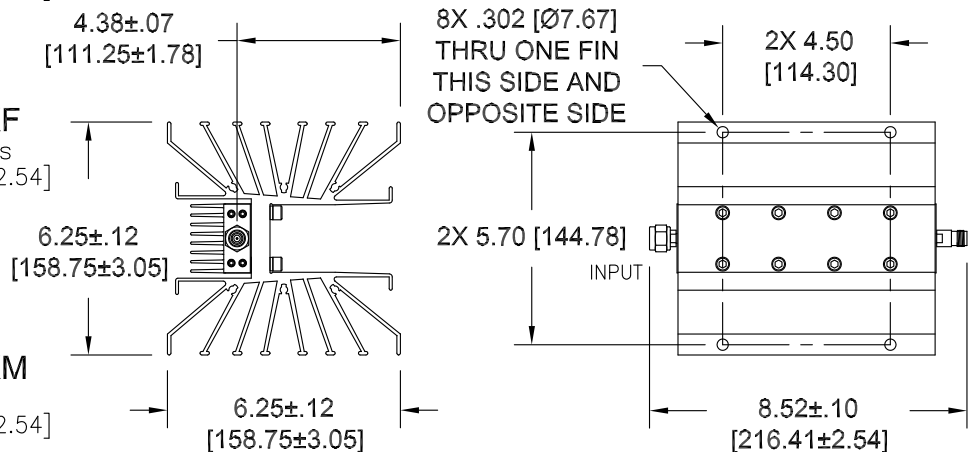

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

HOW TO ORDER:

Ordering Examples:

Model Number: **XT200W-XXY**

Freq. Range
2 = DC - 2.5 GHz
4 = DC - 4 GHz
Connector Config.
= Male/Female
F = Fem/Fem
M = Male/Male
dB Value

Model Number: **2T200W-10**
DC - 2.5 GHz, 10 dB; TNC - Male/Fem

Model Number: **2T200W-40F**
DC - 2.5 GHz, 40 dB; TNC - Fem/Fem

Model Number: **4T200W-30M**
DC - 4 GHz, 30 dB; TNC - Male/Male

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

Design specifications are subject to change without notice.

Contact factory for technical specifications before purchasing or use.

XT200W-ATT; REV H

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com