




Amplitude (dB)

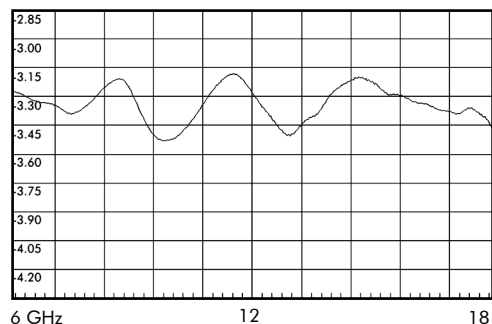



Phase (deg.)

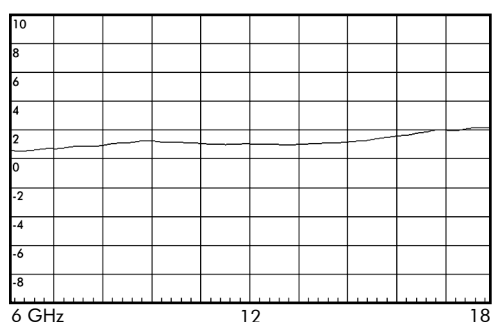

Return Loss (dB)

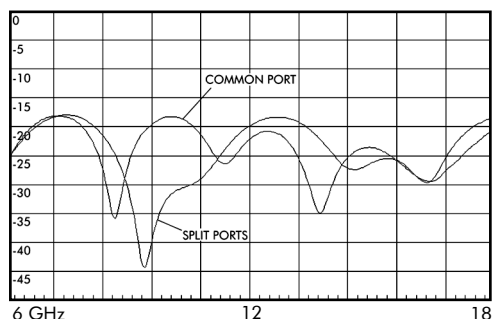

Isolation (dB)

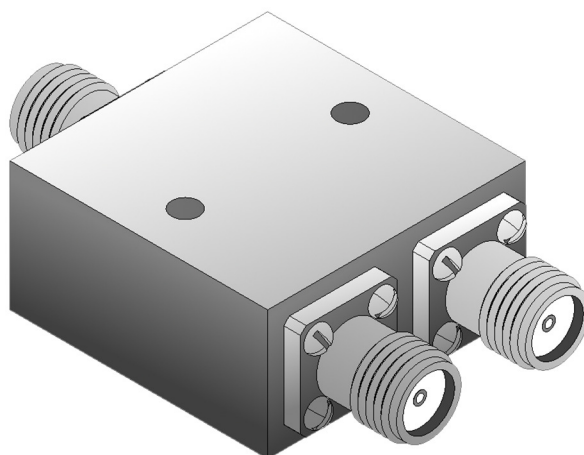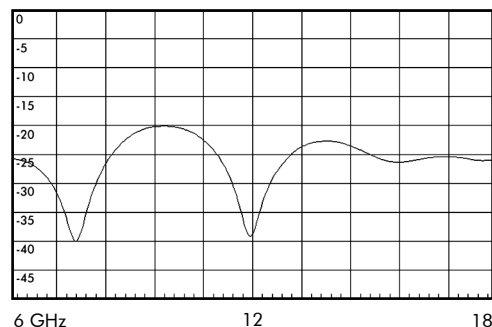


ELECTRICAL SPECIFICATIONS

Frequency Range.....	6,000~18,000 MHz
Insertion Loss.....	0.7 dB, max.
Input Power.....	10 Watts, max.
Input/Output VSWR.....	1.5:1, max.
Isolation.....	17 dB, min.
Phase Balance.....	6 deg., max.
Amplitude Balance.....	0.3 dB, max.
Connection Interface.....	SMA-Female

FEATURES

- All units serialized with test data provided.
- Compact form factor.
- Materials selected for target intermodulation of -140 dBc or better.

MECHANICAL OUTLINE

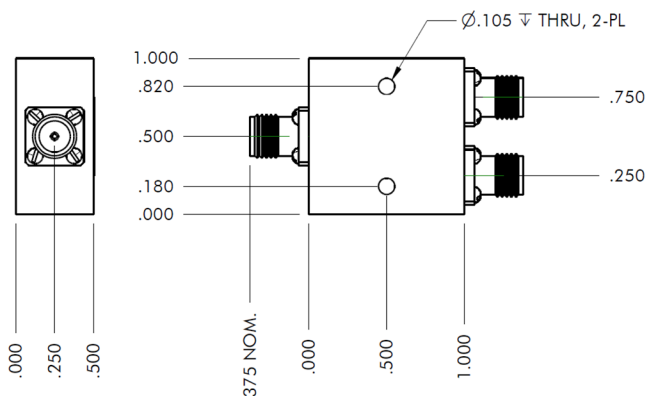

Rev. 0.1
3/18/15

Electrical data, mechanical outline, specification and product photo are representative. Unit-to-unit performance and appearance may vary. Specifications contained herein are subject to change without notice. This document does not constitute a contract of any kind.

Short-Runs
Custom Work
Production

WERBEL MICROWAVE, LLC

51 Chestnut Street, Livingston, New Jersey 07039
Tel. (973) 900-2480 – Fax (973) 716-9430 – Sales@WerbelMicrowave.com
www.WerbelMicrowave.com

