



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com


Product Specifications Approval Sheet

Product Name: SAW Filter 942.5MHz BW35MHz SMD1.4X1.1mm

TST Parts No.: TA1324A

Customer Parts No.: _____

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: Andy Yu 

Approval by: Francis Chen 

Date: 2012/02/22

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 942.5 MHz BW35MHz

MODEL NO.: TA1324A

Rev 1.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -25°C to +75°C
4. Storage Temperature: -30°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Terminating source impedance : $Z_s = 50 \Omega$

Terminating load impedance : $Z_L = 50 \Omega$


Item	Unit	Min.	Type.	Max.	Note
Center Frequency Fc	MHz	-	942.5	-	-
Insertion Loss (925~960 MHz) IL	dB	-	3.0	3.8	-
VSWR (925~960 MHz)	dB	-	1.6	2.0	-
Amplitude ripple (925~960 MHz)	dB	-	1.3	2.2	-
Attenuation					
D.C ~ 880 MHz	dB	38	42	-	-
880 ~ 905 MHz	dB	30	40	-	-
905 ~ 915 MHz	dB	28	38	-	-
980 ~ 3000 MHz	dB	25	31	-	-
3000 ~ 6000 MHz	dB	19	32	-	-
Package size	mm	SMD 1.4x1.1			

C.FREQUENCY CHARACTERISTICS:


S21 Pass-band response: (span 60MHz)

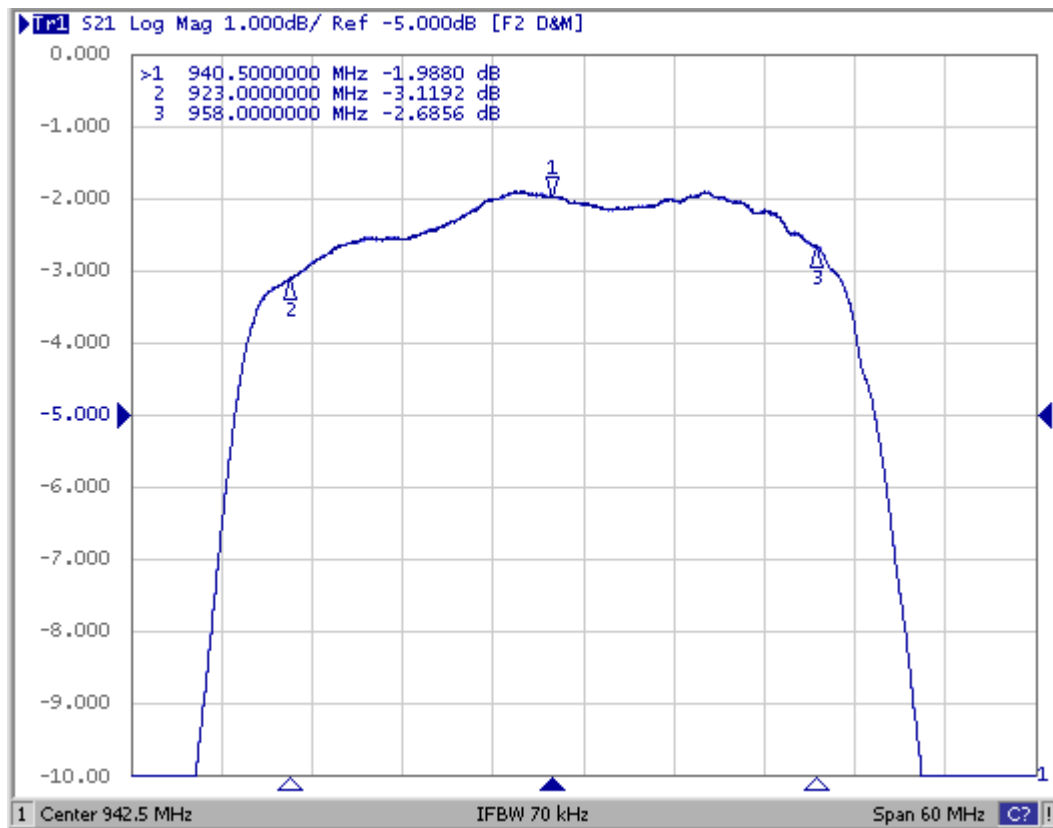


S21 response: (span 300MHz)

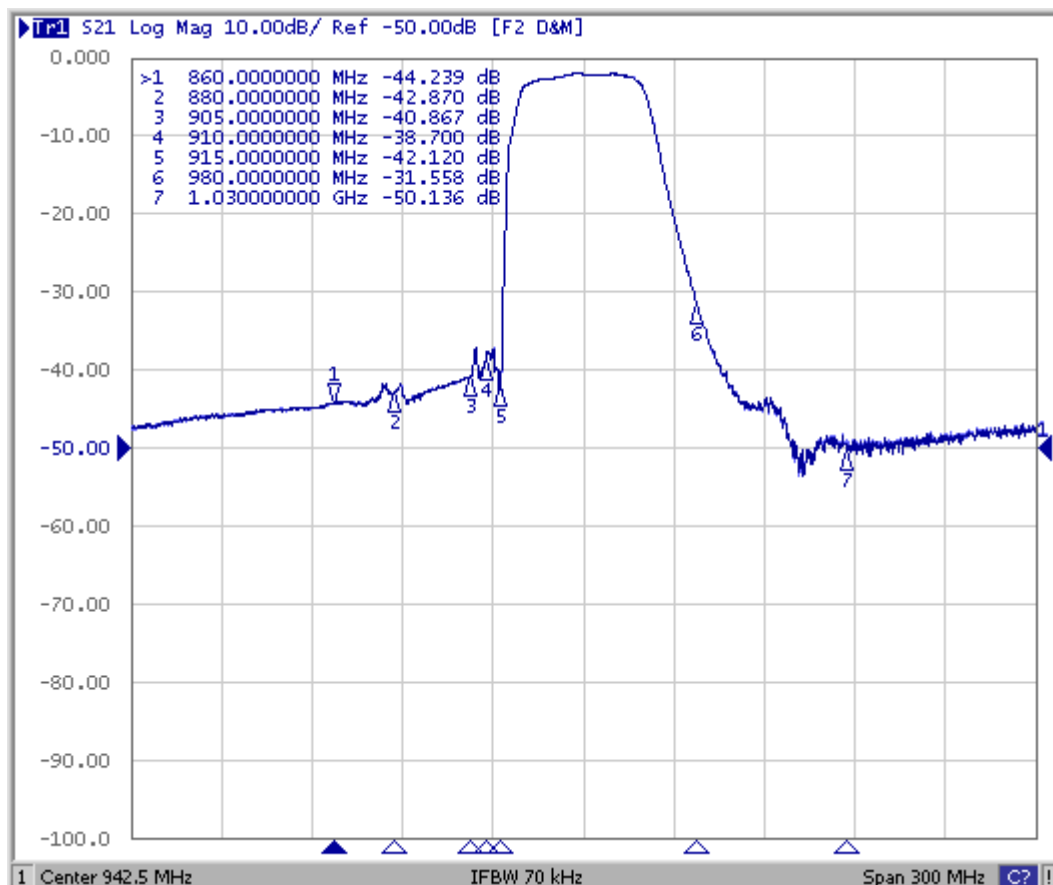


S21 response: (span 6GHz)

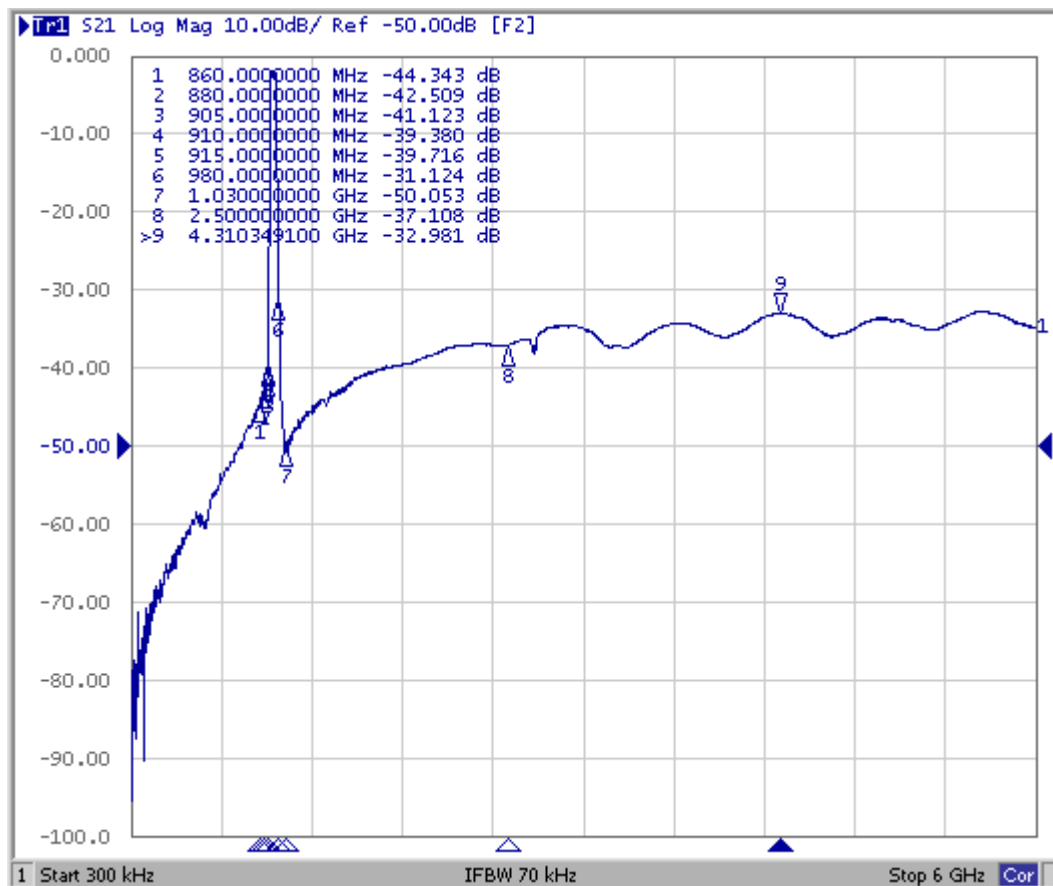


S11&S22 VSWR

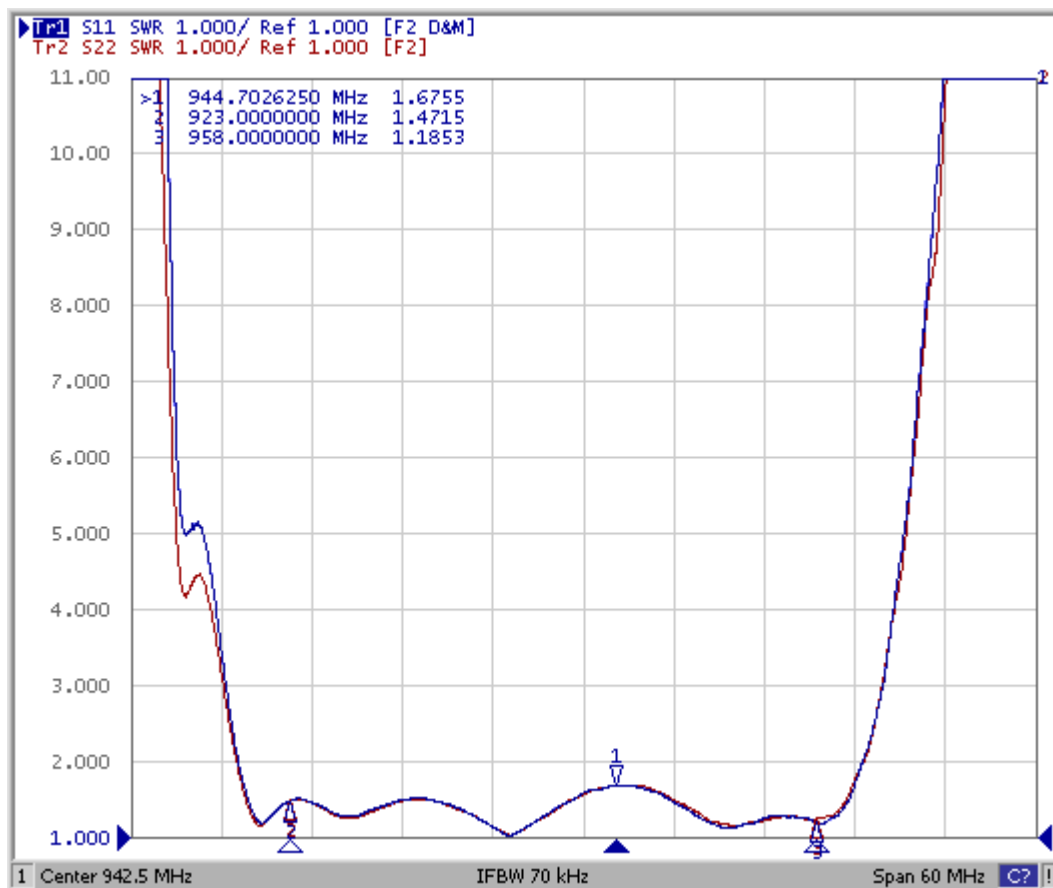


D. MEASUREMENT CIRCUIT:

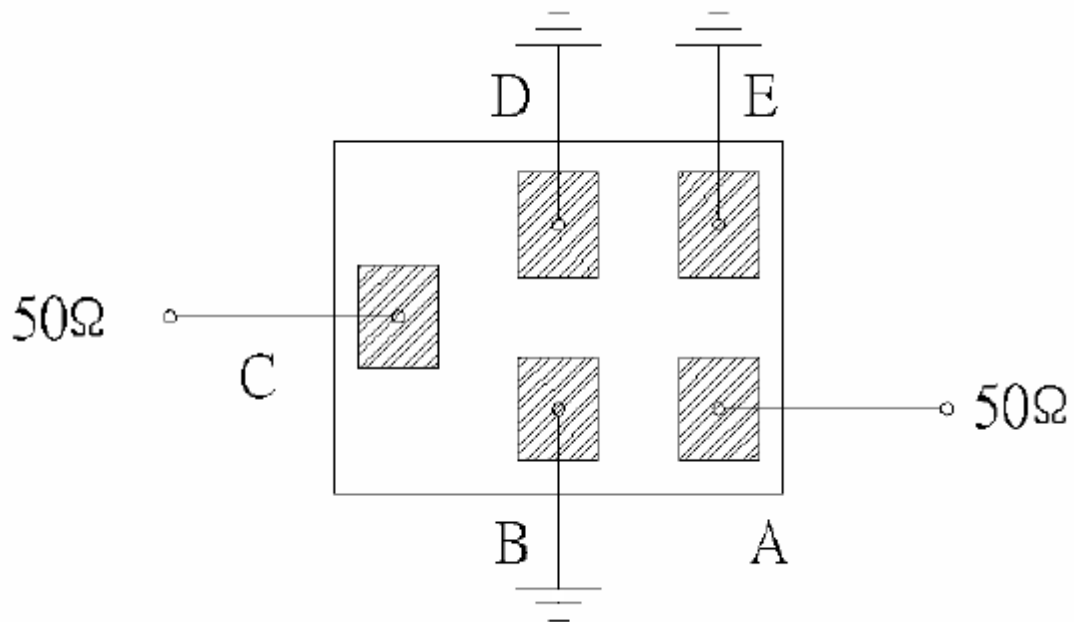

E. PCB FOOTPRINT:

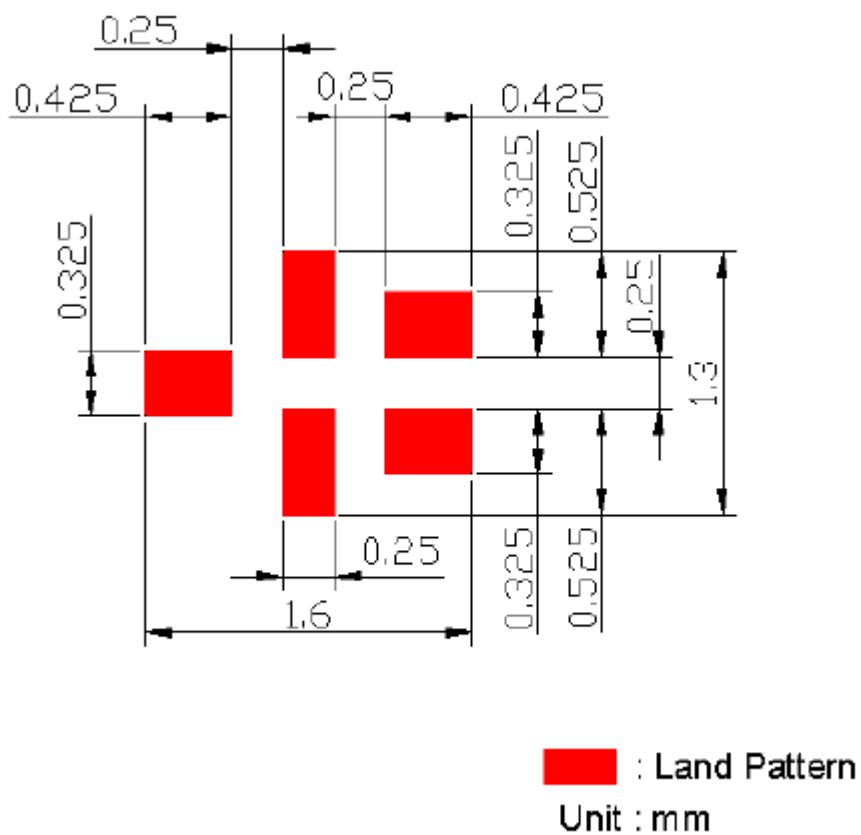

F.OUTLINE DRAWING:

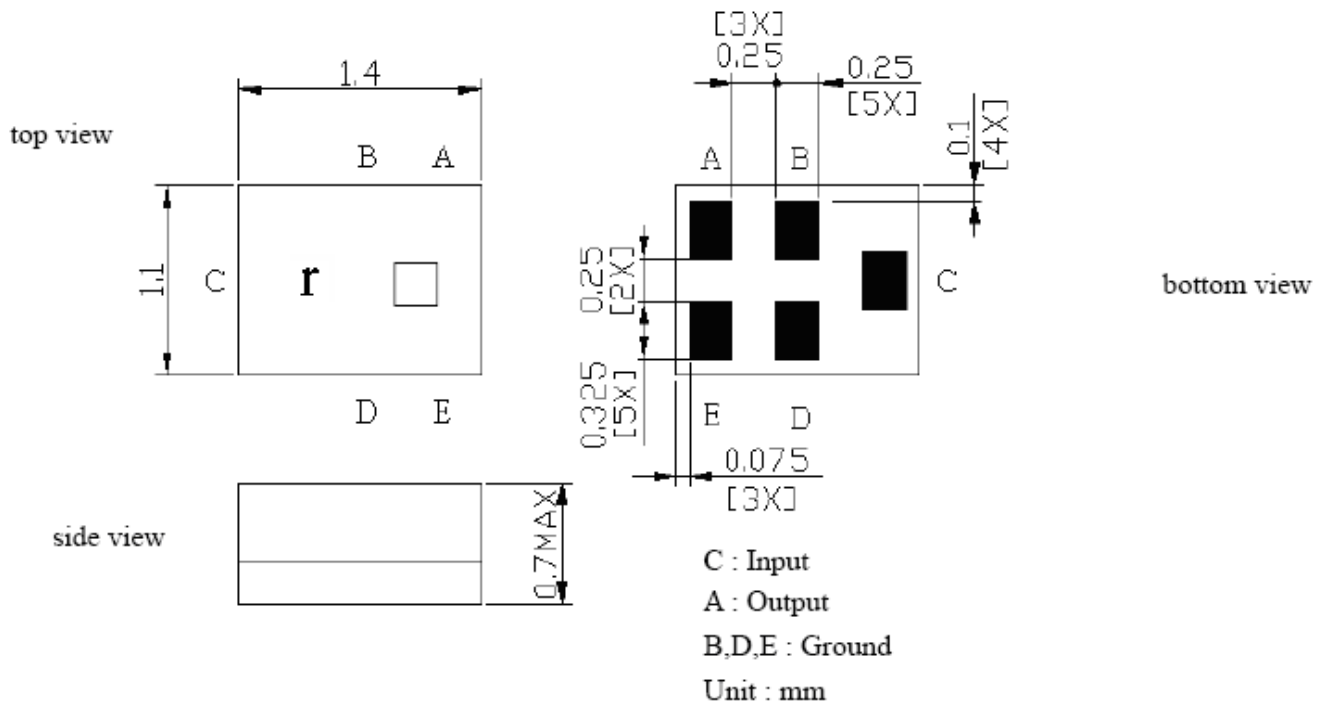


□ : Year/Month Code (Follow the table)

Year/Month	1	2	3	4	5	6	7	8	9	10	11	12
2009	A	B	C	D	E	F	G	H	J	K	L	M
2010	N	P	Q	R	S	T	U	V	W	X	Y	Z
2011	A	B	C	D	E	F	G	H	J	K	L	M
2012	N	P	Q	R	S	T	U	V	W	X	Y	Z
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=3000)

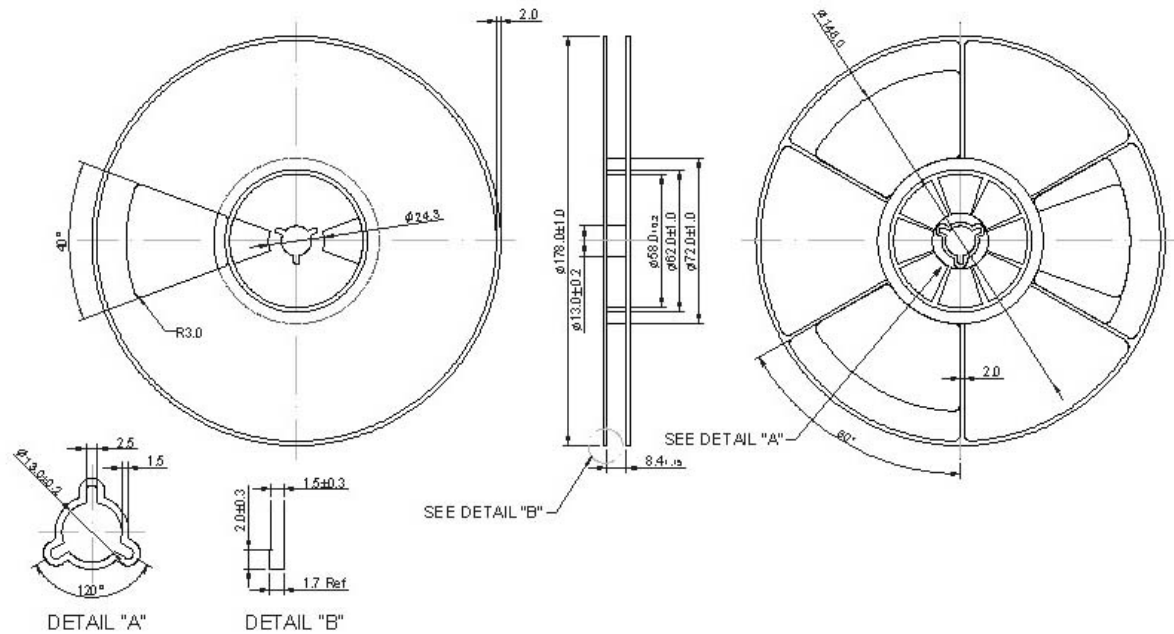

2. TAPE DIMENSION

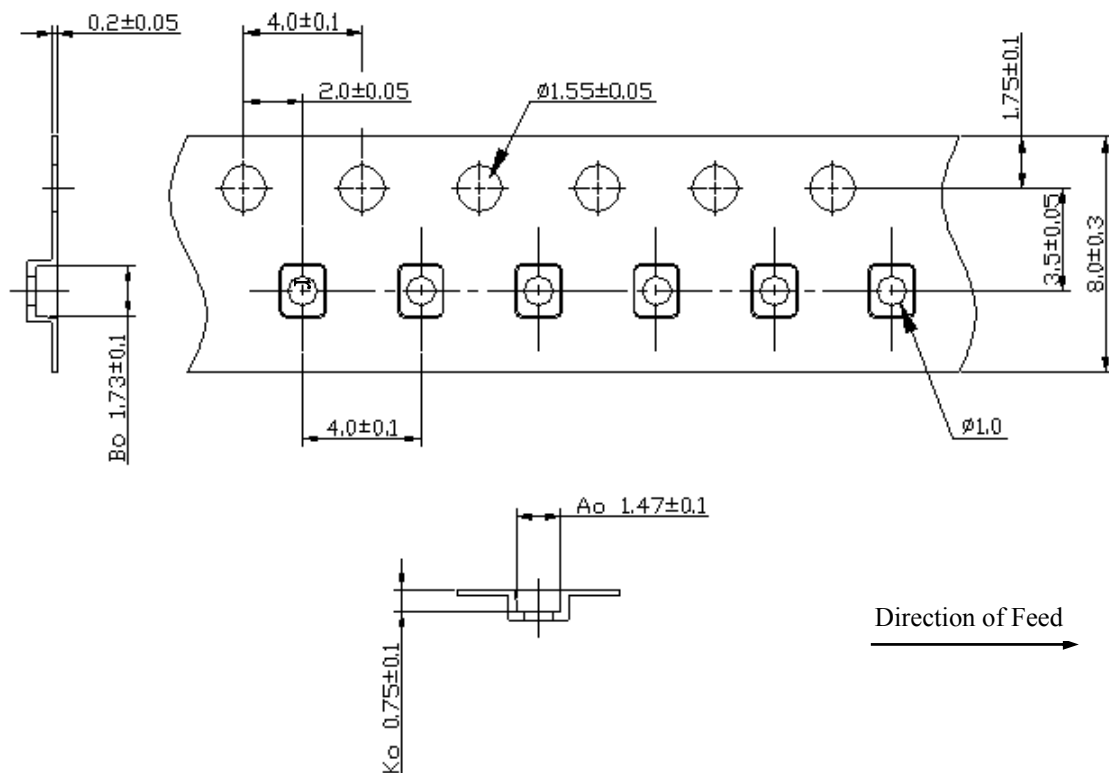

H. RECOMMENDED REFLOW PROFILE :

