
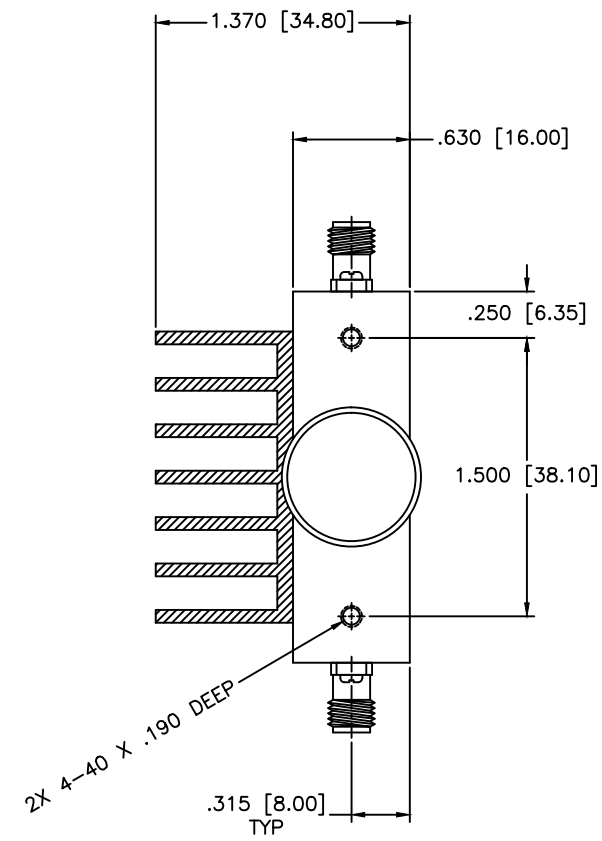
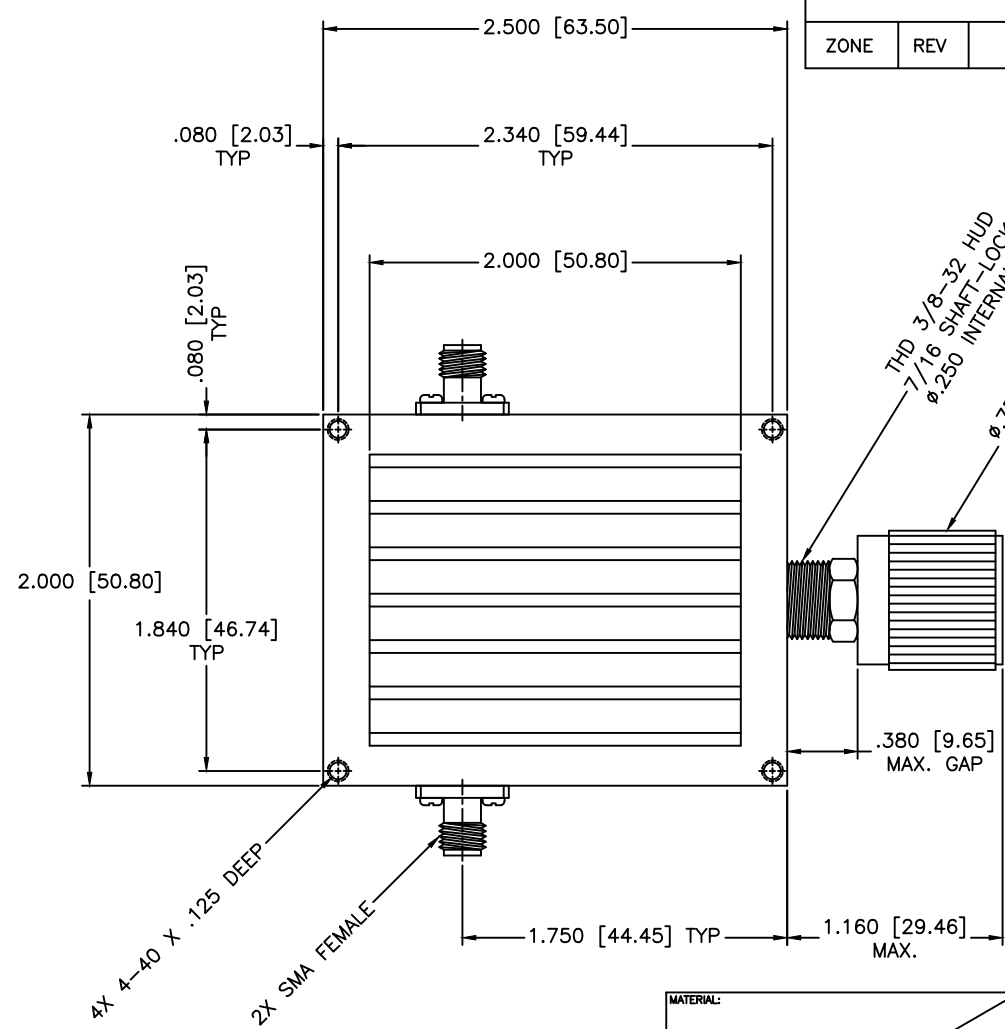


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATION
 Frequency Range: 1-2 GHz
 Attenuation: 10dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1 Max.
 RF Power: 30W Average, 5kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A	
				SHEET:		N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.015 ANGLE: ±1/2°		DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR, HIGH POWER			
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		PART NO. HA30-4-10			
				CAGE CODE:			
				SIZE:		REV:	
DRAWN: Paiboon Luekhamhan		DATE: 02-10-2011		A		N/A	
APPROVED: T. Nguyen		DATE: 02-10-2011		OD2L5		85484	
				DO NOT SCALE THE DRAWING			