

50 Ohm 10 Watts Aluminum Heatsink TNC
Female RF Load Up To 18 GHz



TECHNICAL DATA SHEET

PE6140

50 Ohm 10 Watts Aluminum Heatsink TNC Female RF Load Up To 18 GHz

Configuration

Connector	TNC Female
Connector Specification	MIL-STD-348

Electrical Specifications

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum VSWR	1.4:1
Maximum Input Power, Watts	10
Peak Power, Watts	500

Frequency 1

Frequency, GHz	DC to 6
VSWR	1.2:1

Frequency 2

Frequency, GHz	6 to 12.4
VSWR	1.3:1

Frequency 3

Frequency, GHz	12.4 to 18
VSWR	1.4:1

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +125
------------------------	-------------

Size

Length, in [mm]	1.82 [46.23]
Width/Dia., in [mm]	1 [25.4]

Connector

Type	TNC Female
Inner Conductor Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Passivated Stainless Steel

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 10 Watts Aluminum Heatsink TNC Female RF Load Up To 18 GHz PE6140](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

50 Ohm 10 Watts Aluminum Heatsink TNC
Female RF Load Up To 18 GHz



TECHNICAL DATA SHEET

PE6140

50 Ohm 10 Watts Aluminum Heatsink TNC Female RF Load Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 10 Watts Aluminum Heatsink TNC Female RF Load Up To 18 GHz PE6140](http://www.pasternack.com/tnc-female-high-power-termination-pe6140-p.aspx)

URL: <http://www.pasternack.com/tnc-female-high-power-termination-pe6140-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE6140 CAD Drawing

50 Ohm 10 Watts Aluminum Heatsink TNC Female RF Load Up To 18 GHz

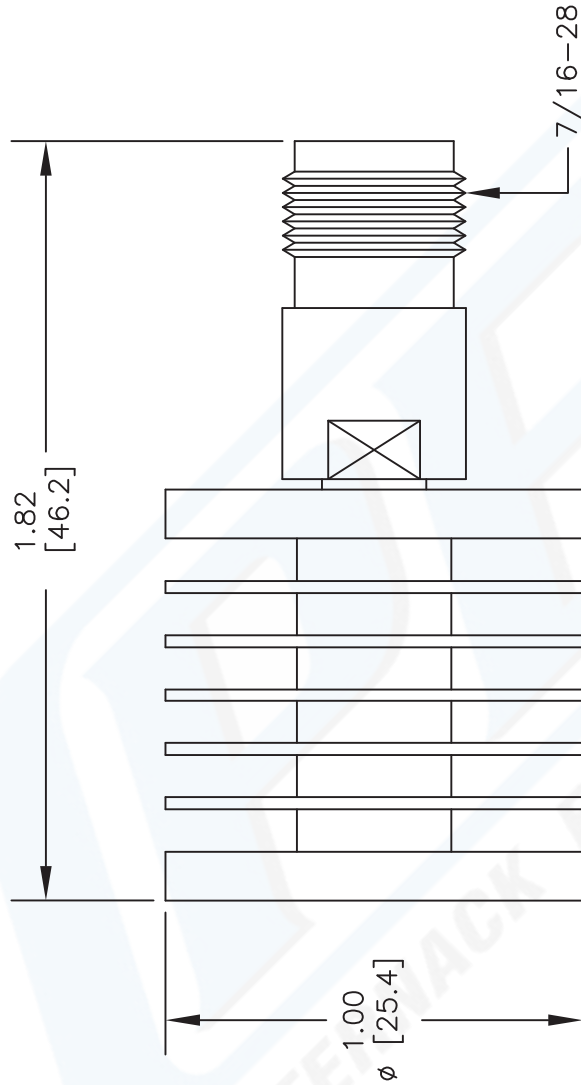

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE6140

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623

PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com

E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS



PASTERNAK ENTERPRISES®
ESTABLISHED 1972

FSCM NO. 53919

REV. A

SCALE N/A

SIZE A

2233