


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

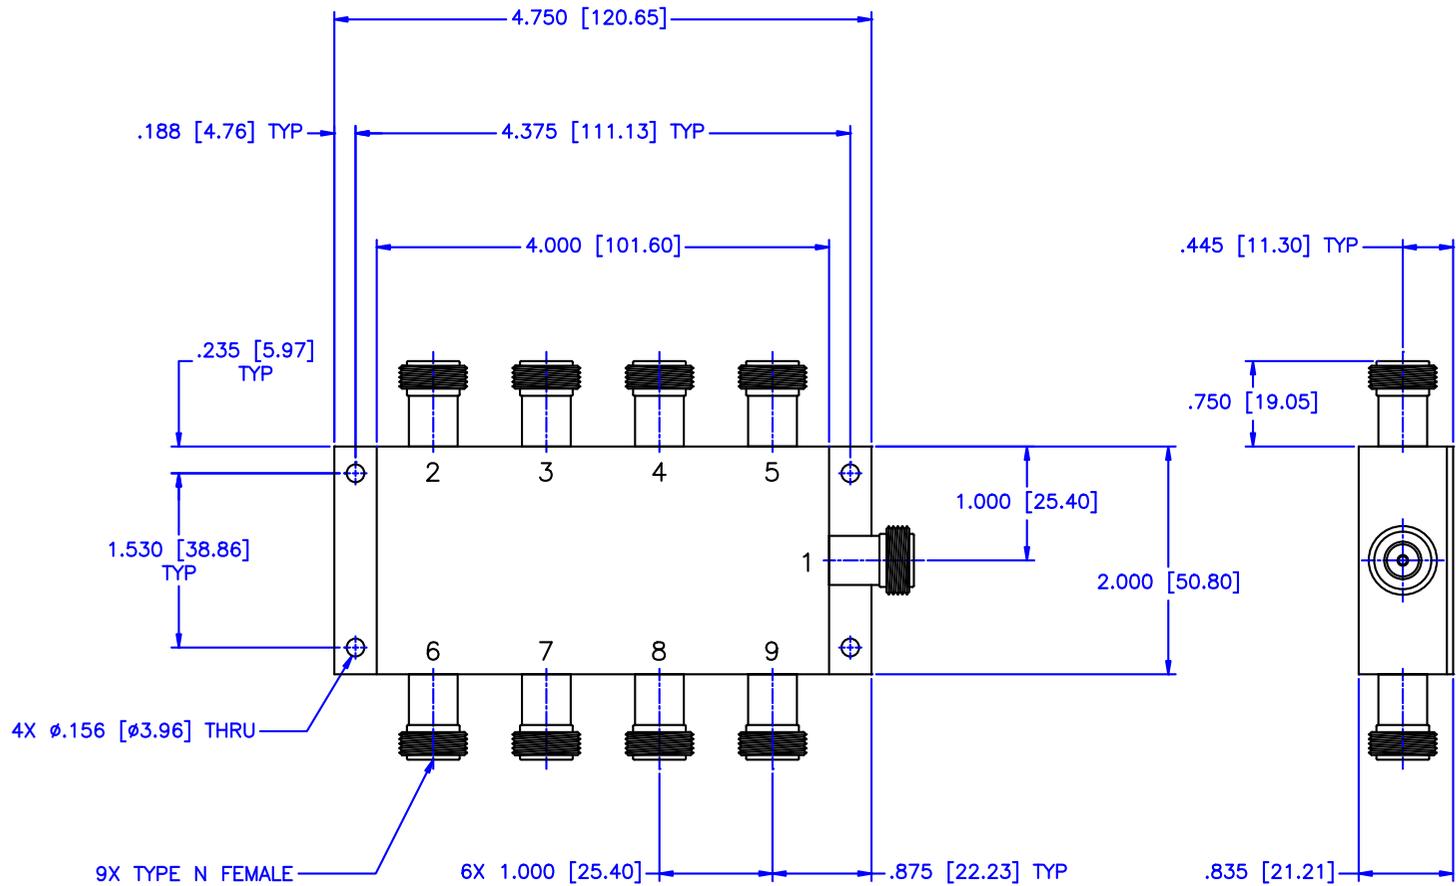

**SPECIFICATIONS**

	LB	MB	UB
Freq. Range: 5–500MHz			
Isolation Typ/Min (dB):	25/20	30/20	30/20
Insertion Loss Typ/Max (dB):	1.0/1.8	1.8/2.0	1.8/2.7
Amplitude Balance Max. (dB):	0.20	0.30	0.50
Phase Balance Max. (Degrees):	3.0	6.0	10.0

MATERIAL:		<b>MICROWAVE COMMUNICATIONS LABORATORIES INC.</b> 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>8-WAY LUMPED ELEMENT POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan		PART NO. <b>PL8-2/NF</b>	
DATE: 11-05-1997	DATE: 11-05-1997	CAGE CODE: OD2L5	
APPROVED: T. Nguyen	DATE: 11-05-1997	SIZE: N/A	REV: A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	DWG NO. 83777
THIRD ANGLE PROJECTION			