

MABA-010238-CT4A80




Transformer, 1:2
5 MHz - 1200MHz

Rev. V2

Features

- ◆ 1:2 impedance ratio
- ◆ Surface mount
- ◆ Available on tape and reel
- ◆ 260°C reflow compatible
- ◆ RoHS Compliant and Pb free
- ◆ Excellent temperature stability
- ◆ Can be used on 50Ω and 75Ω systems

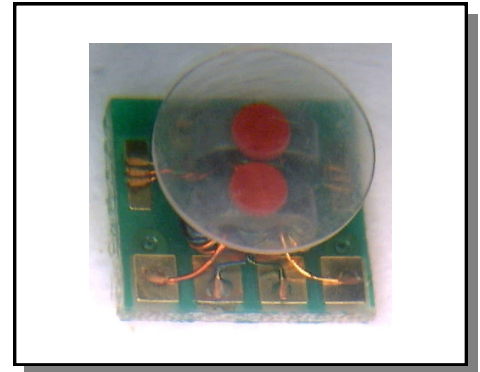


Electrical Specifications: $Z_0 = 75\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$

Parameter	Conditions	Units	Min	Typ	Max
Frequency Range		MHz	5		1200
Impedance		Ω		75	
Impedance Ratio				1:2	
Insertion Loss1 Pin1 to Pin2	5 - 50 MHz	dB	-	0.40	0.60
	50 - 1000 MHz	dB	-	1.80	1.80
	1000 - 1200 MHz	dB	-	1.35	2.10
Insertion Loss2 Pin1 to Pin5	5 - 50 MHz	dB	-	0.55	0.90
	50 - 1000 MHz	dB	-	1.00	2.20
	1000 - 1200 MHz	dB	-	1.85	2.60
Amplitude Unbalance	5 - 50 MHz	dB	-	0.15	± 0.60
	50 - 1000 MHz	dB	-	0.20	± 1.40
	1000 - 1200 MHz	dB	-	0.50	± 1.70
Phase Balance	5 - 50 MHz	dB	-	0.50	± 3.0
	50 - 1200 MHz	dB	-	3.00	± 8.0
Input Return Loss	5 - 50 MHz	dB	21	26	-
	50 - 1000 MHz	dB	11	26	-
	1000 - 1200 MHz	dB	9	13	-

Pin Configuration

Pin No.	Function
1	Input (PRI dot)
2	Output 1 (SEC dot)
3,4,6	Ground
5	Output 2 (SEC)

Schematic

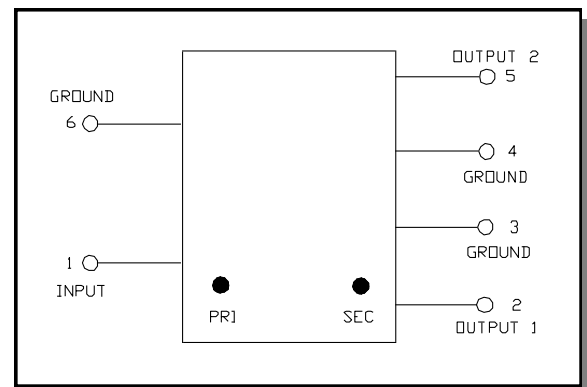


MABA-010238-CT4A80




Transformer, 1:2
5 MHz - 1200MHz

Rev. V2


Insertion Loss: Pin1—Pin2

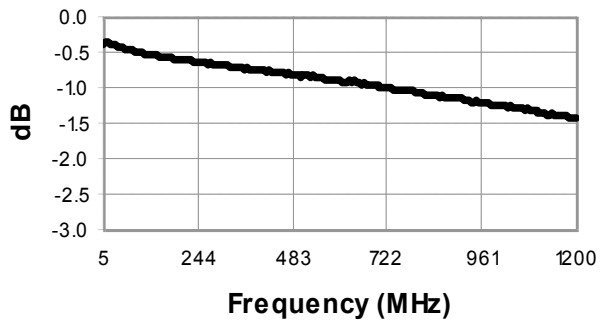


Insertion Loss: Pin1—Pin5

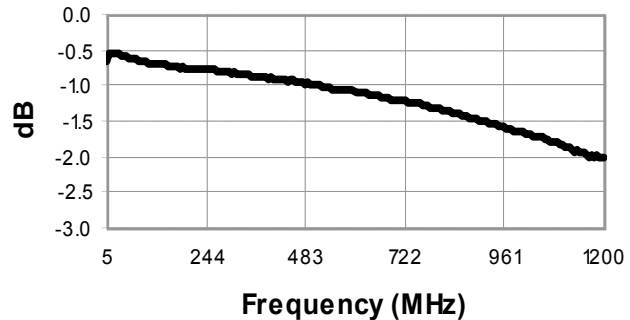


Amplitude Balance

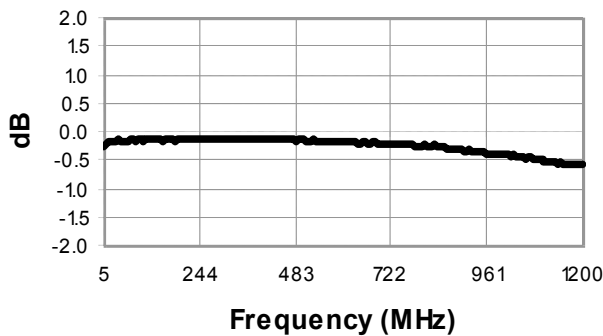

Phase Balance

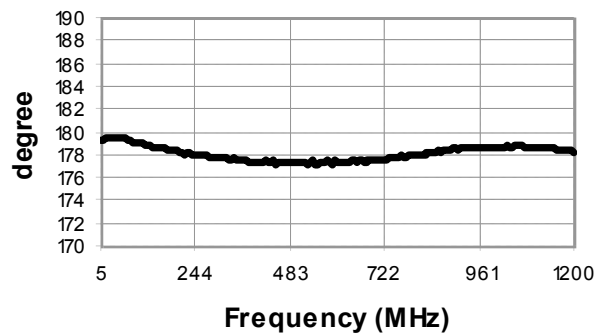

Return Loss: Input

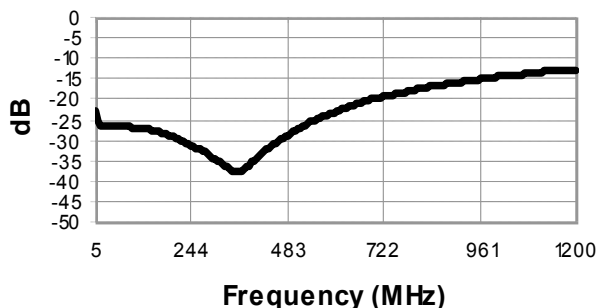


MABA-010238-CT4A80



Transformer, 1:2
5 MHz - 1200MHz


Rev. V2

Outline Drawing

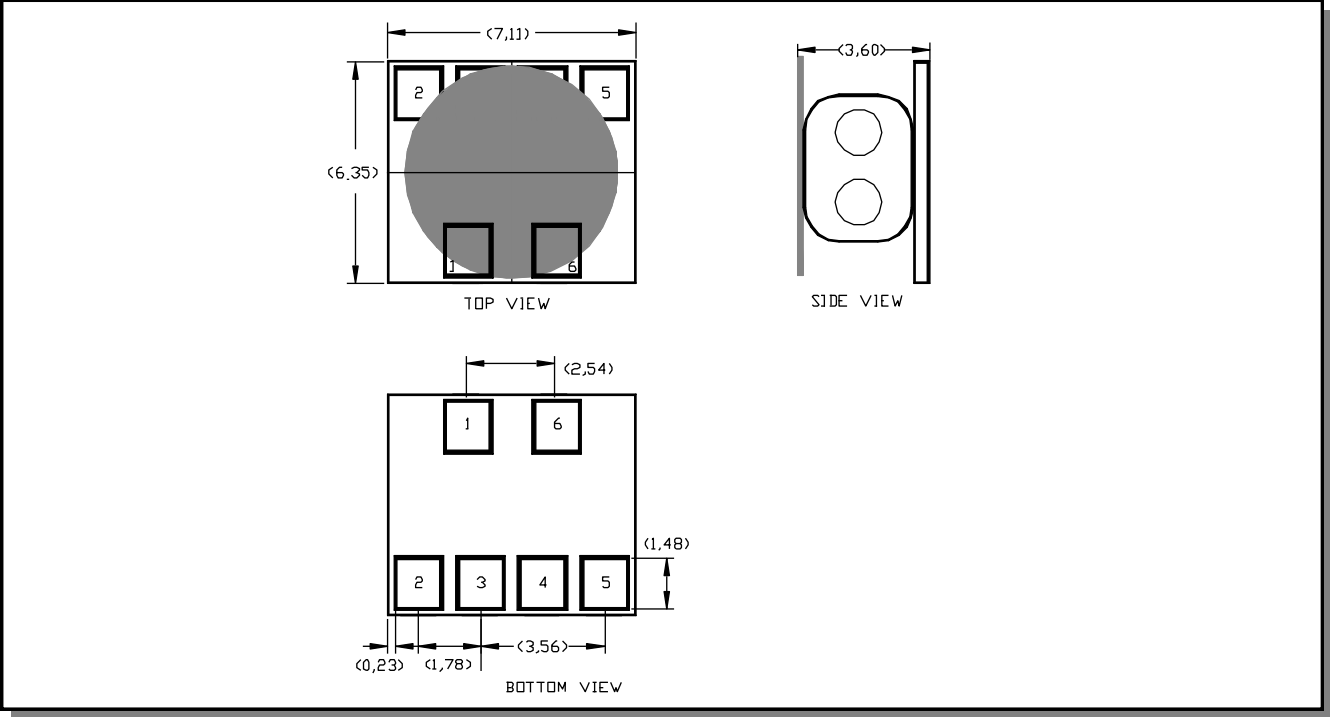


1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Finish: ENIG

Recommended DC bias circuit

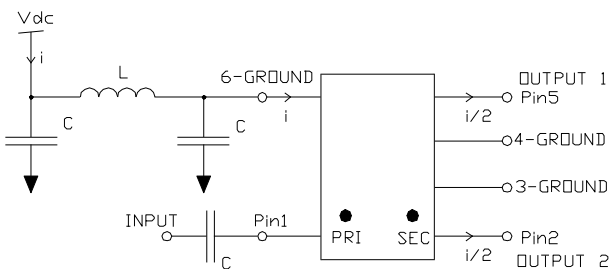

Cap/Ind	5-50MHz	50-1200MHz
C	100nF	10nF
L	10μH	1μH

Recommended Footprint

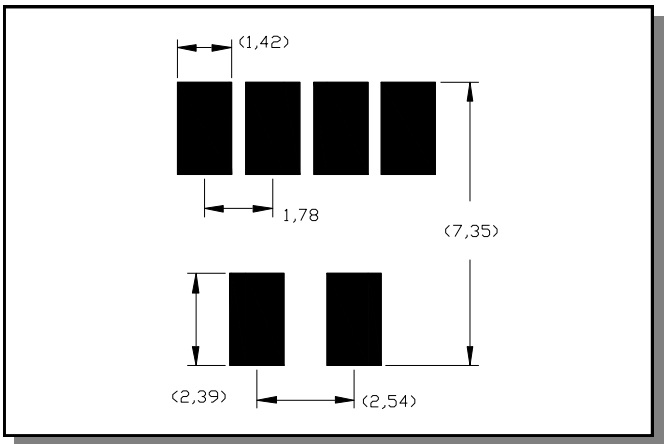

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

MABA-010238-CT4A80



Transformer, 1:2
5 MHz - 1200MHz

Rev. V2

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel size	mm	330
Tape width	mm	16.0
Pitch	mm	12.0
A ₀	mm	6.7
B ₀	mm	7.5
K ₀	mm	3.9
Orientation	-	F42

Ordering Information

Part Number	Description
MABA -010238-CT4A80	Tape & Reel
MABA -010238-CT4ATB	Customer Evaluation Board

Recommended Maximum Ratings

Parameter	Units	Min	Max
Input Power	mW		250
DC Current	mA		200
Operating Temperature Range	°C	-40	+85
Storage Temperature Range	°C	-55	+125

Temperature data available on request