

Werlatone®, Inc.

17 Jon Barrett Road Patterson, New York 12563

T (845) 278 2220

www.werlatone.com

F (845) 278 3440

sales@werlatone.com



Absorptive VHF Low Pass Filter

Model AF9349

Frequency: 10 - 150 MHz

Power:

Pass Band: 500 W CW

Stop Band: 100 W CW

Insertion Loss:

Pass Band: 0.4 dB Max.


Rejection:

300-1500 MHz: 50 dB Min.

VSWR:

10-150 MHz: 1.35:1 Max.

151-1500 MHz: 1.45:1 Max.

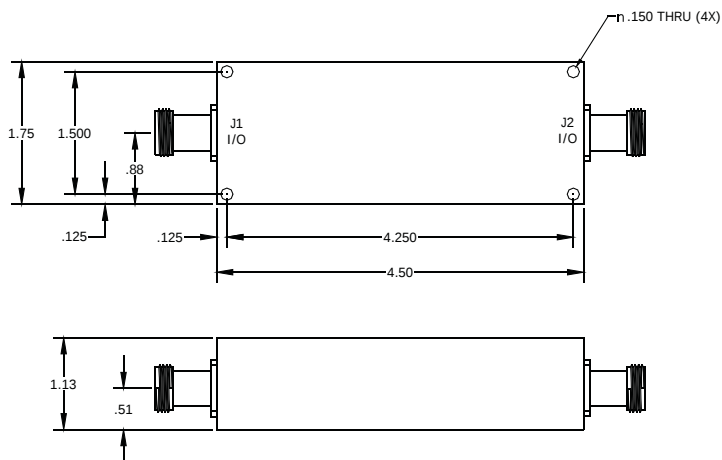

Connector Configurations

Model	J1 (Input/Output)	J2 (Input/Output)
AF9349-10	N Female	N Female
AF9349-12	N Female	SMA
AF9349-102	SMA	SMA

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

Insertion Loss & Band Rejection:



Return Loss:

