


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

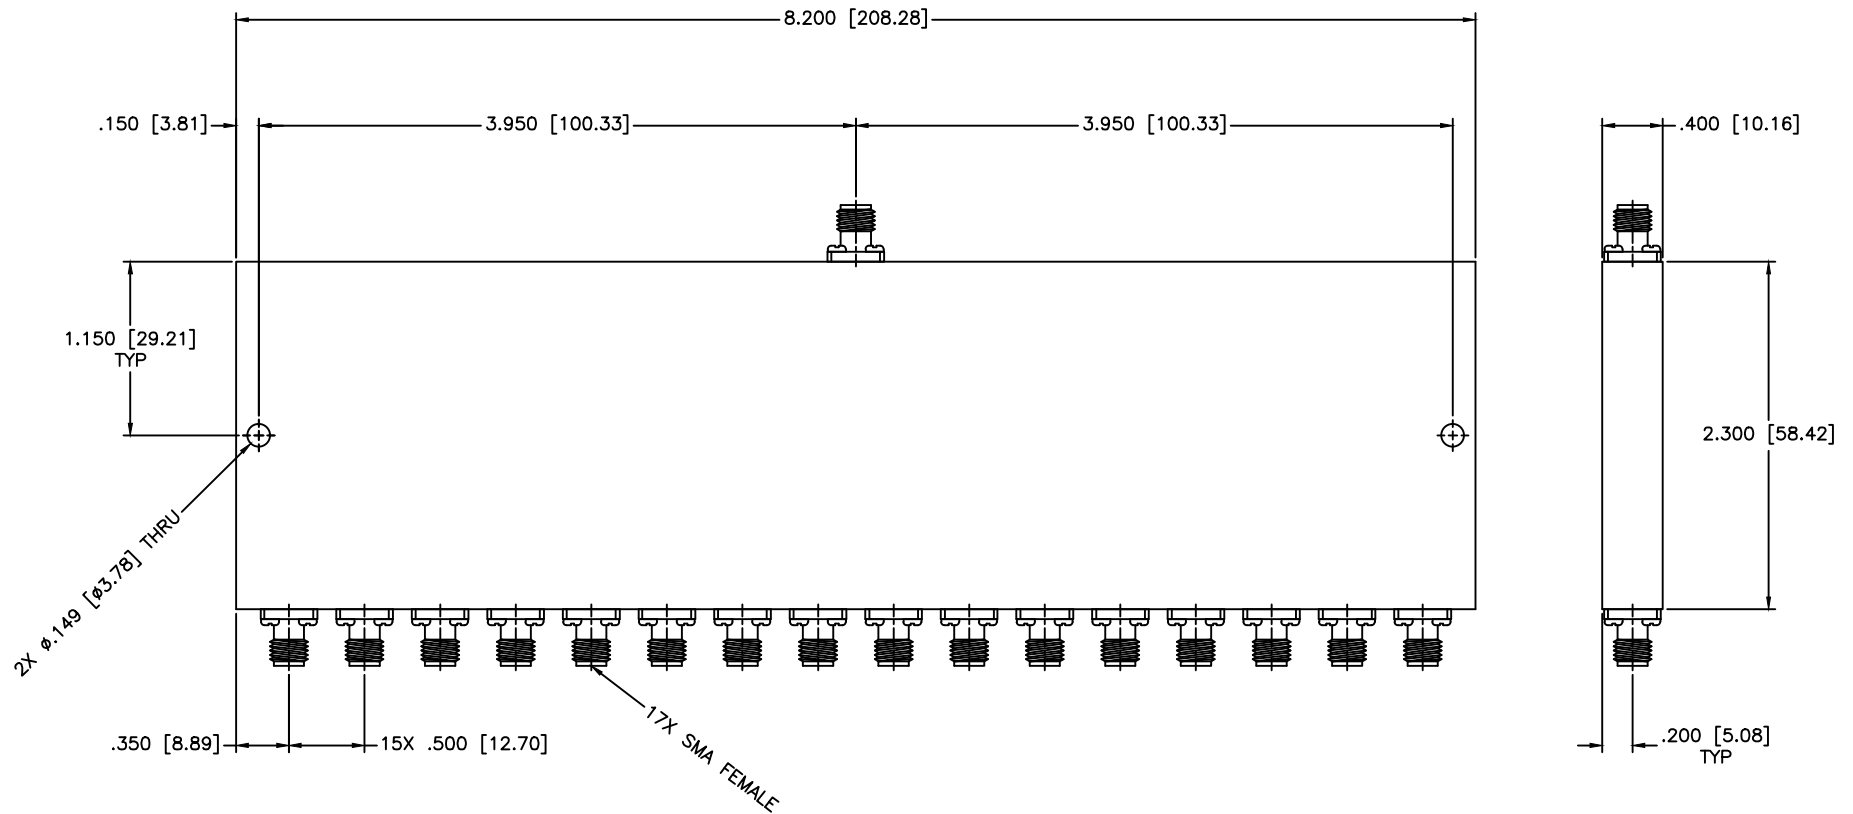

SPECIFICATIONS

Frequency Range: 1–2 GHz
 VSWR: 1.50:1 Max.
 Amplitude Balance: ± 1 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Insertion Loss: 2.9dB Max.
 Isolation: 18dB Min.
 Input Power: 30W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A	
				SHEET:		N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		DRAWING TITLE:			
				16-WAY POWER DIVIDERS			
DRAWN:		DATE:		PART NO.		PS16-2	
Paiboon Luekhamhan		08-29-2001		CAGE CODE:		SIZE:	
APPROVED:		DATE:		THIRD ANGLE PROJECTION		REV:	
						N/A	
T. Nguyen		08-29-2001		OD2L5		DWG NO.	
						82159	
						DO NOT SCALE THE DRAWING	