




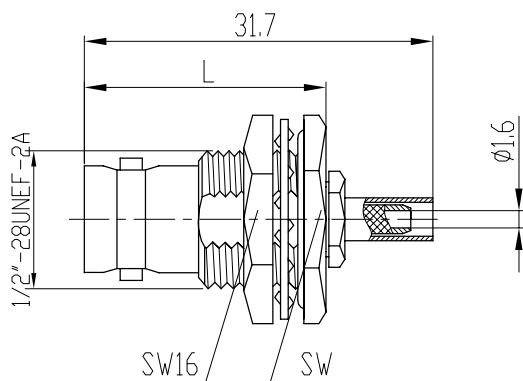

安装开孔
mounting hole



剥线尺寸
stripping dimensions



产品型号 type	电缆型号 cable type	A	B	C	L	SW
BNC-KY3YC	SFF-50-1.5-1、SYV-50-2-1	10.5	4.7	3.0	18.7	19.0
BNC-KY3YE	RG179B/U、RG316/U	18.7	12.2	5.0	20.2	17.0

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: $\leq 1.5 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1500V
- VSWR: ≤ 1.5
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: $\leq 1.5 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

Application: MIL-C-39012/16E

执行标准: MIL-C-39012/16E

Material&Finishing

- Center contact :
Female: phosphor bronze, gold plated
- Bodies and other metal parts:
brass, nickel plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 锡磷青铜, 镀金
- 壳体和其它金属零件:
黄铜, 镀镍
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

 	SCALE	
	1.5:1	
NAME	DATE	
DRAWN		
CHECKED		
APPROVED		

BNC-KY3YC
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.