

TNC STRAIGHT PLUG RG316 CRIMP

SC4261


SPECIFICATIONS

ELECTRICAL
FREQUENCY: 0-3 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.2 MAX

MECHANICAL
MATERIAL BODY: NICKLE PLATED BRASS
MATERIAL CONTACT: BRASS
CONTACT PLATING: 30 µ-IN
INSULATOR: TEFLON
INTERFACE: MIL-STD-348B
TEMPERATURE: -55°C to +120°C

ROHS COMPLIANT

ASSEMBLY PROCEDURE:
TRIM CABLE AS SHOWN
SLIDE SLEEVE ONTO CABLE
SOLDER CONTACT ONTO CENTER CONDUCTOR
FLARE CUT END OF BRAID SLIGHTLY BY ROTATING DIELECTRIC
PUSH CABLE IN UNTIL DIELECTRIC BOTTOMS IN CONNECTOR
TRIM EXCESS BRAID WIRES EVEN WITH SHOULDER OF BODY
SLIDE CRIMP SLEEVE FORWARD UNTIL FLUSH W BODY
CRIMP

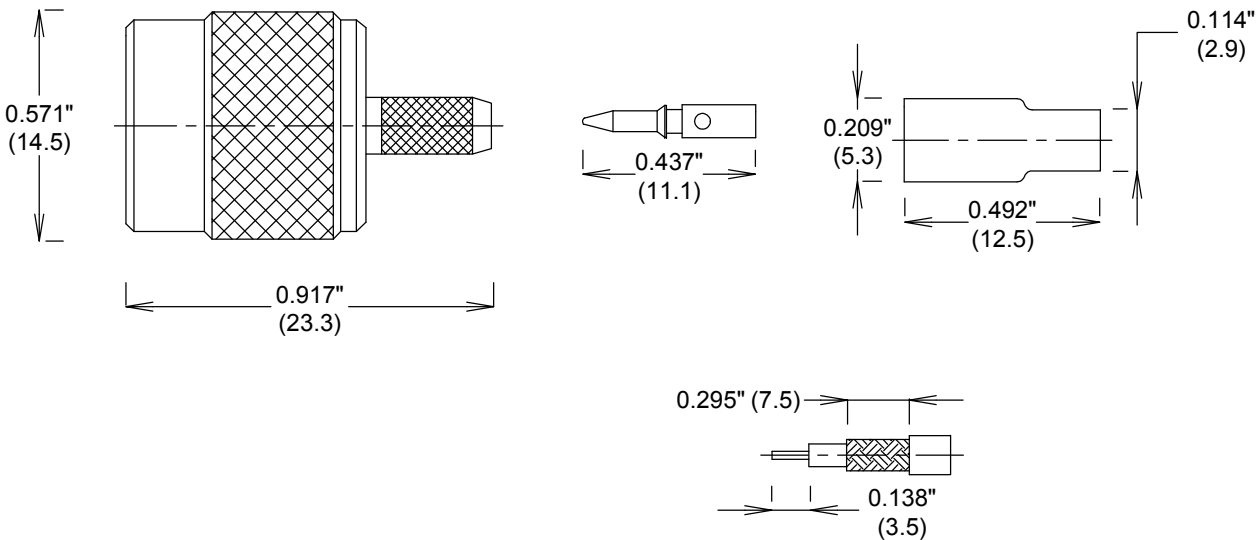

STRIPPING DIMENSIONS

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TNC STRAIGHT PLUG RG316 CRIMP

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC4261	---
SCALE	SHEET		

ALL DIMENSIONS IN inches(MM) Typical