

D

C

B


A

D

C

B

A

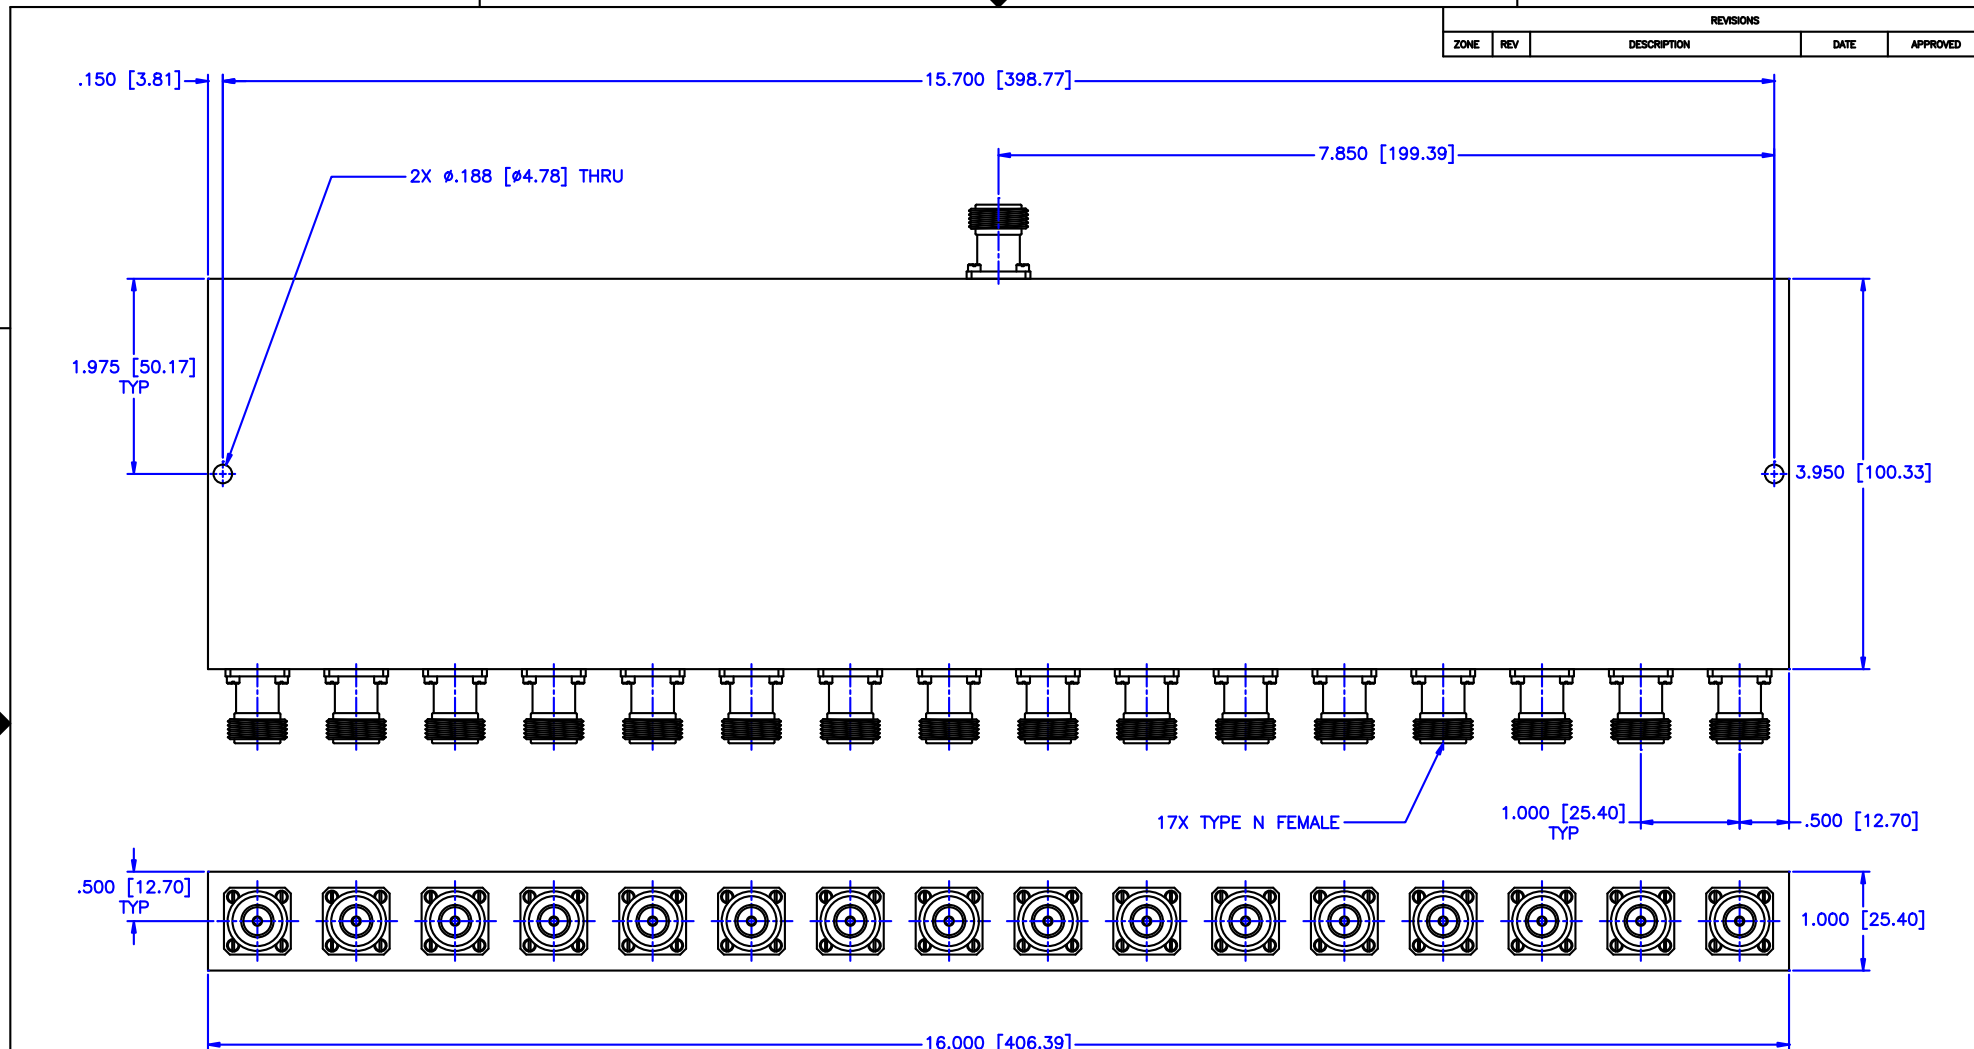

SPECIFICATIONS:

Frequency Range: 400–500 MHz
Insertion Loss: 1.30dB Max.
Isolation: 17dB Min.
VSWR: 1.60:1 Max.
Power Rating: 50 Watts CW
Amplitude Balance: ± 0.9 dB Max.
Phase Balance: $\pm 10^\circ$ Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
DRAWING TITLE: 16-WAY POWER DIVIDER		PART NO. PS16-159-50		SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		CAGE CODE: 0D2L5		SIZE: D
DRAWING: Paboon Luekhamhan		DATE: 09-27-2011		REV: N/A
APPROVED: T. Nguyen		DATE: 09-27-2011		DWG NO. 85896
DO NOT SCALE THE DRAWING				