



SMA Female Bulkhead Connector Solder Attachment Solder Cup Terminal, .235 inch D Hole, .093 inch Max Panel

TECHNICAL DATA SHEET

PE4529

SMA Female Bulkhead Connector Solder Attachment Solder Cup Terminal, .235 inch D Hole, .093 inch Max Panel

Configuration

Connector	SMA Female
Connector Specification	MIL-C-39012
Connector Interface Type	Solder Cup
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	Bulkhead

Electrical Specifications

Impedance, Ohms	50
-----------------	----

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

Size

Length, in [mm]	0.668 [16.97]
Width/Dia., in [mm]	0.437 [11.10]
Weight, lbs [g]	0.008 [3.63]

Connector

Type	SMA Female
Contact Material and Plating	Gold
Contact Plating Specification	MIL-G-45204
Body Material and Plating	Stainless Steel, Gold
Body Plating Specification	MIL-G-45204
Dielectric Type	Teflon

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead Connector Solder Attachment Solder Cup Terminal, .235 inch D Hole, .093 inch Max Panel PE4529](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Female Bulkhead Connector Solder Attachment Solder
Cup Terminal, .235 inch D Hole, .093 inch Max Panel

TECHNICAL DATA SHEET

PE4529

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMA Female Bulkhead Connector Solder Attachment Solder Cup Terminal, .235 inch D Hole, .093 inch Max Panel from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead Connector Solder Attachment Solder Cup Terminal, .235 inch D Hole, .093 inch Max Panel PE4529](http://www.pasternack.com/sma-female-standard-solder-cup-terminal-connector-pe4529-p.aspx)

URL: <http://www.pasternack.com/sma-female-standard-solder-cup-terminal-connector-pe4529-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE4529 CAD Drawing

SMA Female Bulkhead Connector Solder Attachment Solder
Cup Terminal, .235 inch D Hole, .093 inch Max Panel

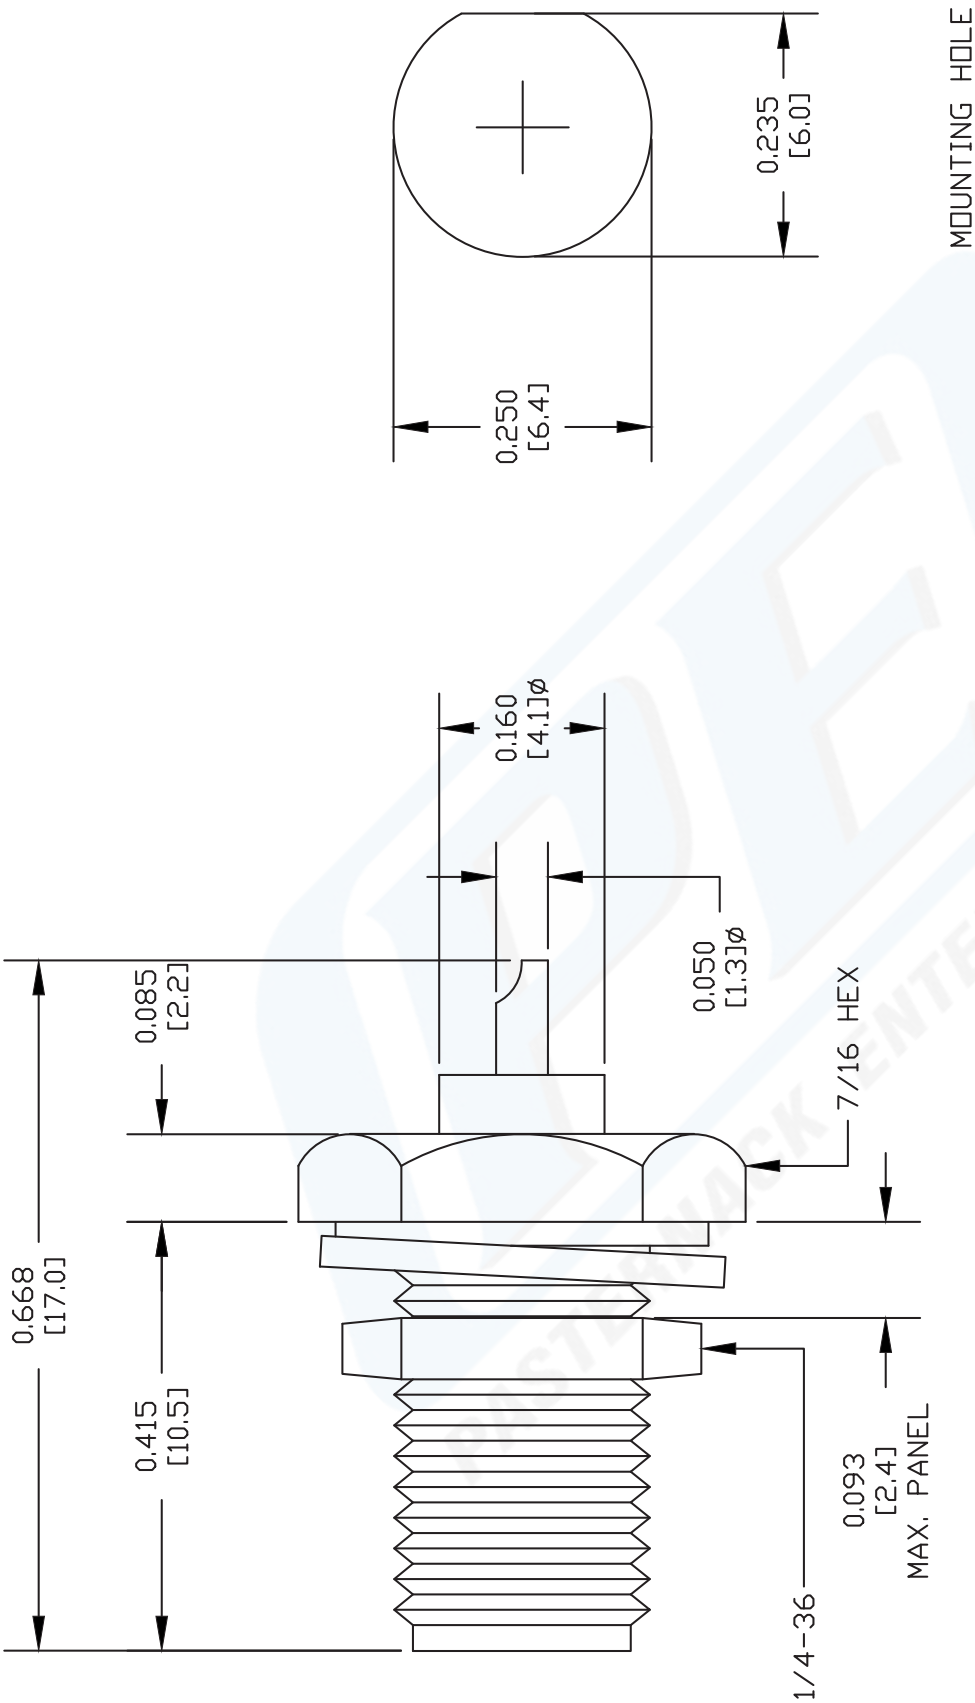

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE4529

PE PASTERNAK
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 060302 SCALE N/A SIZE A XXXX