



Whip Antenna Operates From 470 MHz to 512 MHz With
a Typical 0 dBi Gain MX Input Connector IP67 Rated

TECHNICAL DATA SHEET

PE51162

Pasternack's ¼ wave portable omni whip antennas feature a textured black finish and a strain-relief base to ensure durability and repeatable RF performance. Our ¼ wave portable omni whip antennas are available with operating frequencies as low as 400 MHz and as high as 960 MHz. These antennas are offered with gain ranges from unity to 2 dBi. The omni-directional radiation pattern and IP67 rating make these antennas ideal for mobile radio communications.

- Operating frequencies from 400 MHz to 960 MHz
- Gain ranges from unity to 2 dBi
- VSWR less than 2:1, in most cases
- 50 Ohm Impedance
- IP67 Rated
- Variety of connector types available (SMA Female, MX, or MD) for use in many portable handheld radio applications. See below for common brand & connector combinations.
- MX (1/4-32 x 7/32) – Commonly used in: Motorola, Radius, Saber, Saber+, Spirit, Expo, Kenwood, Maxon, Midland, Wilson, GE Monogram, and Vertex Standard.
- MD (M7 x 1.0) – Commonly used in: GE
- SMA Female (SF) – Commonly used in: Motorola, Visar, and Kenwood

Configuration

Design	Whip Portable
Frequency Range	470 to 512 MHz
Polarization	Vertical
Interface 1	MX
Number of Output Ports	1

Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Impedance		50		Ohms
Typical Gain	0			dBi
Input VSWR			2:1	

Mechanical Specifications

Radome Material	TPE
Size	
Length	5.63 in [143 mm]
Width	0.58 in [14.73 mm]
Weight	0.032 lbs [14.51 g]

Environmental Specifications

Temperature	
Operating Range	-20 to +65 deg C
Environment	IP67

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Whip Antenna Operates From 470 MHz to 512 MHz With a Typical 0 dBi Gain MX Input Connector IP67 Rated PE51162](#)



Whip Antenna Operates From 470 MHz to 512 MHz With
a Typical 0 dBi Gain MX Input Connector IP67 Rated

TECHNICAL DATA SHEET

PE51162


Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant

Plotted and Other Data

Notes:

- Values at 25 °C, sea level

Outline Drawing

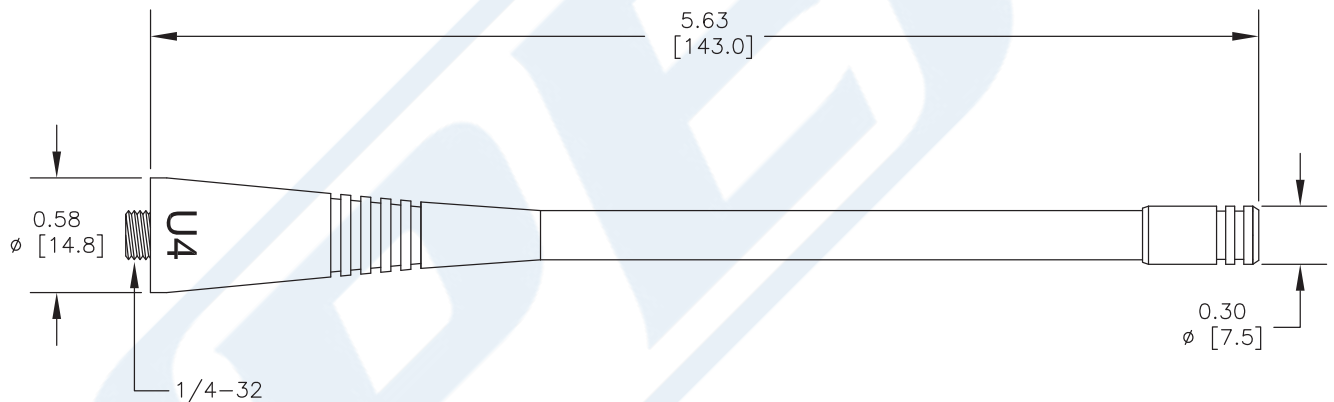

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Whip Antenna Operates From 470 MHz to 512 MHz With a Typical 0 dBi Gain MX Input Connector IP67 Rated PE51162](#)

PE51162



UL
REGISTERED FIRM
PASTERNAK ENTERPRISES, INC.
CERTIFICATE NO. 1005857-0003
ISSUED: 01-01-2008