


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

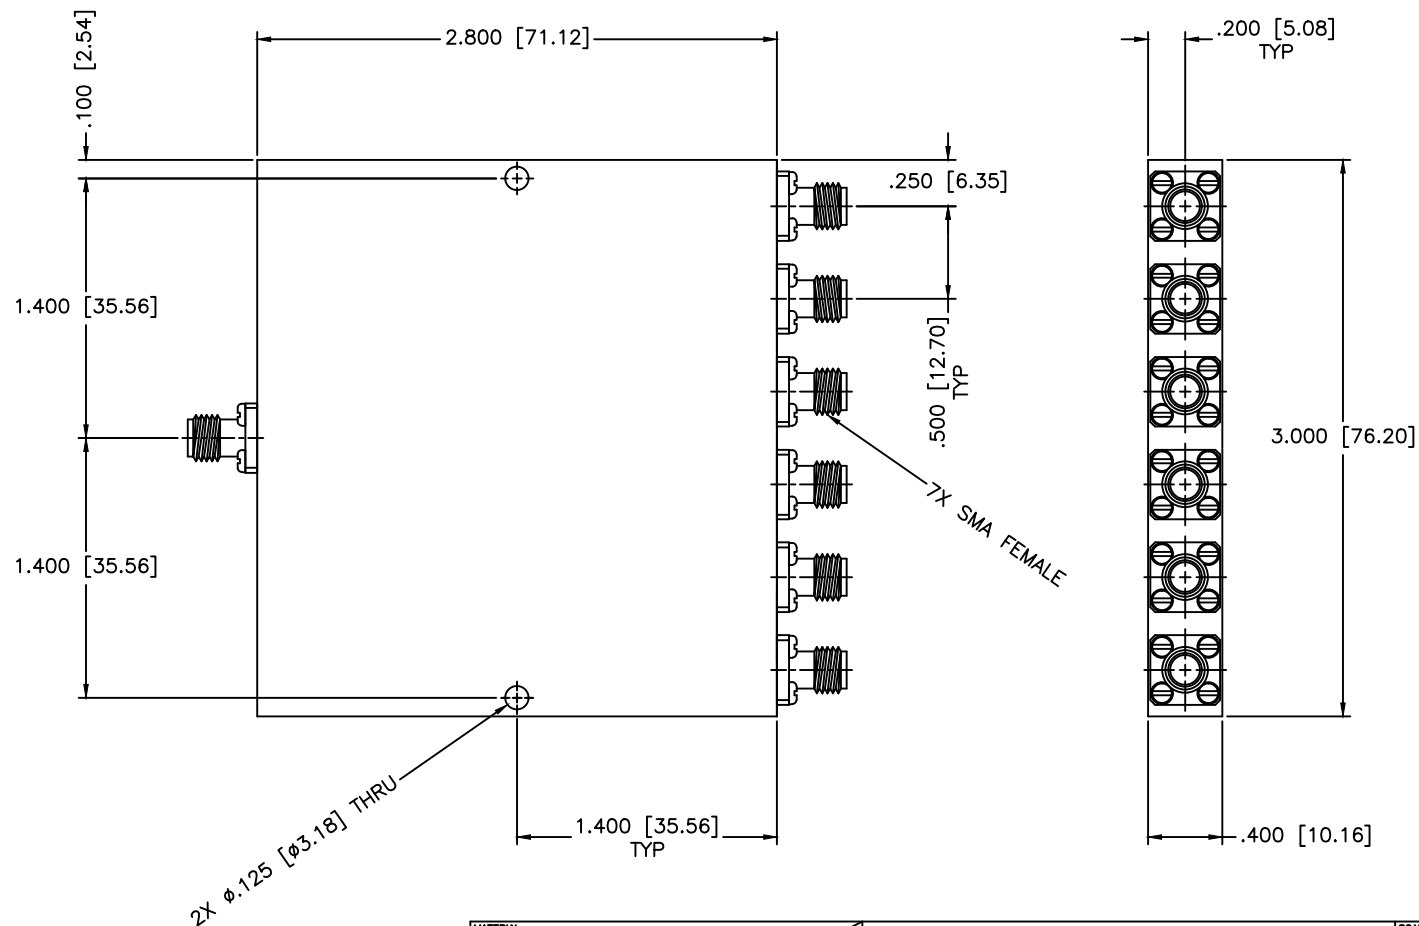

SPECIFICATIONS

Frequency Range: 8–26.5 GHz
Insertion Loss: 3.9dB Max.
Isolation: 12dB Min.
VSWR: 1.75:1 Max.
Amplitude Balance: ± 2.5 dB Max.
Power: 20W (Load VSWR $\odot$ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DRAWING TITLE: 6-WAY POWER DIVIDER		
DATE: 11-02-2009		PART NO. PS6-40		
APPROVED: T. Nguyen		CAGE CODE: OD2L5		
DATE: 11-02-2009		SIZE: N/A		REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 84625