



Let Performance Drive

CMD169P4

5-7 GHz Driver Amplifier

Features

- ▶ High output power
- ▶ On-chip detector
- ▶ All positive bias
- ▶ Pb-free RoHs compliant 4x4 QFN package


Description

The CMD169P4 is a GaAs MMIC driver amplifier housed in a leadless 4x4 mm plastic surface mount package. The CMD169P4 is ideally suited for complex communications systems where small size and high linearity are needed. At 6 GHz the device delivers 19 dB of gain with a corresponding output 1 dB compression point of greater than +28 dBm. The CMD169P4 is a 50 ohm matched design which eliminates the need for external DC blocks and RF port matching. The CMD169P4 is also equipped with an on-chip detector for applications where power leveling is required.

Applications

- ▶ WiMAX and WiLAN
- ▶ UNII and ISM
- ▶ Military end-use

Functional Block Diagram

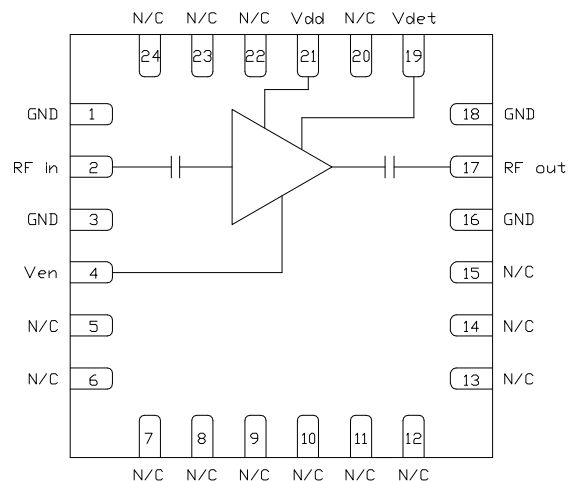

Electrical Performance - $V_{dd} = 7.0$ V, $V_{en} = 3.0$ V, $T_A = 25$ °C, $F = 6$ GHz

Parameter	Min	Typ	Max	Units
Frequency Range	5-7			GHz
Gain		19		dB
Input Return Loss		18		dB
Output Return Loss		12		dB
Output P1dB		28.4		dBm
Supply Current ($V_{dd} = 7$ V)		375		mA
Enable Current ($V_{en} = 3$ V)		19		mA

ver 1.0 1012

Specifications

Absolute Maximum Ratings

Parameter	Rating
Drain Voltage, Vdd	8.0 V
Enable Voltage, Ven	4.0 V
RF Input Power	+25 dBm
Channel Temperature, Tch	150 °C
Power Dissipation, P _{diss}	3.69 W
Thermal Resistance	17.6 °C/W
Operating Temperature	-40 to 85 °C
Storage Temperature	-55 to 150 °C

Operation of this device outside the maximum ratings may cause permanent damage.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Vdd	5.0	7.0	8.0	V
I _{dd}		375		mA
Ven	0	3.0	4.0	V
I _{en}		19		mA


Electrical performance is measured at specific test conditions. Electrical specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications - V_{dd} = 7.0 V, Ven=3.0 V T_A = 25 °C


Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range	5-7			5.6 - 6			GHz
Gain	15	18	21	16	19	22	dB
Input Return Loss		13			18		dB
Output Return Loss		12			12		dB
Output P _{1dB}	27	28.4		27	28.4		dBm
Output IP ₃		34			37		dBm
Supply Current	345	375	405	345	375	405	mA
Enable Current		19			19		mA
Gain Temperature Coefficient		0.025			0.025		dB/°C

Typical Performance

Broadband Performance, $V_{dd} = 7.0$ V, $V_{en} = 3.0$ V, $I_{dd} = 375$ mA, $T_A = 25$ °C

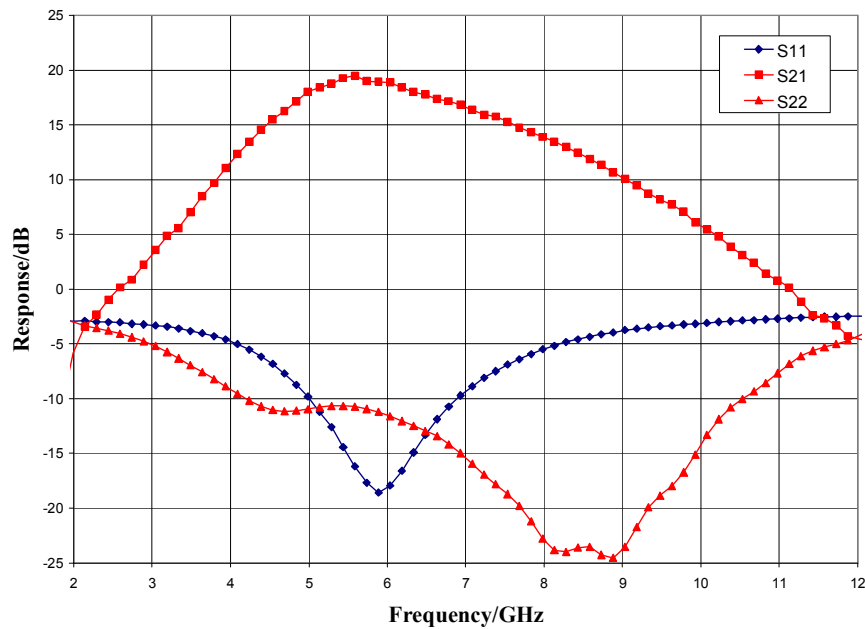


Narrow-band Performance, $V_{dd} = 7.0$ V, $V_{en} = 3.0$ V, $I_{dd} = 375$ mA, $T_A = 25$ °C

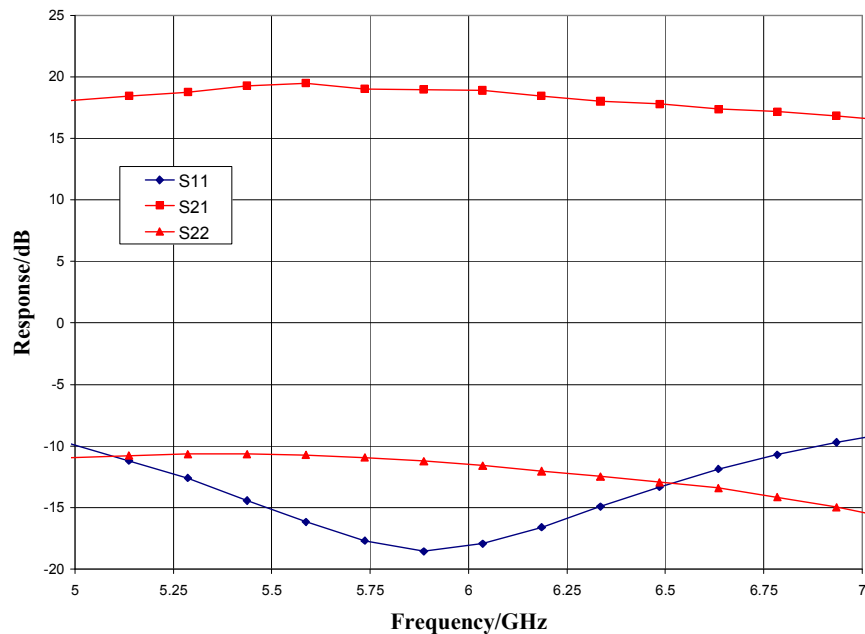


ver 1.0 1012

Typical Performance

Gain vs. Temperature, $V_{dd} = 7.0\text{ V}$, $V_{en} = 3.0\text{ V}$

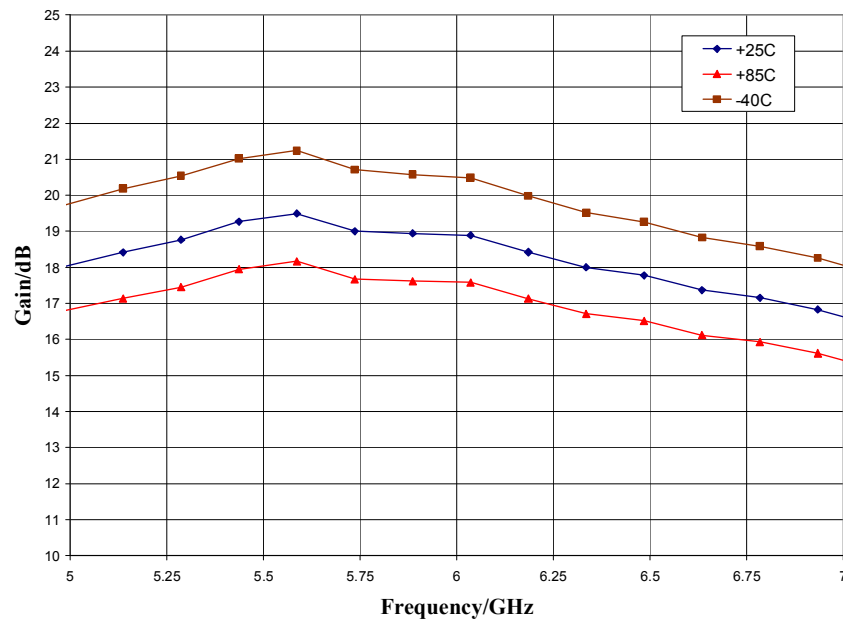


Output Power, $V_{dd} = 7.0\text{ V}$, $V_{en} = 3.0\text{ V}$, $T_A = 25^\circ\text{C}$

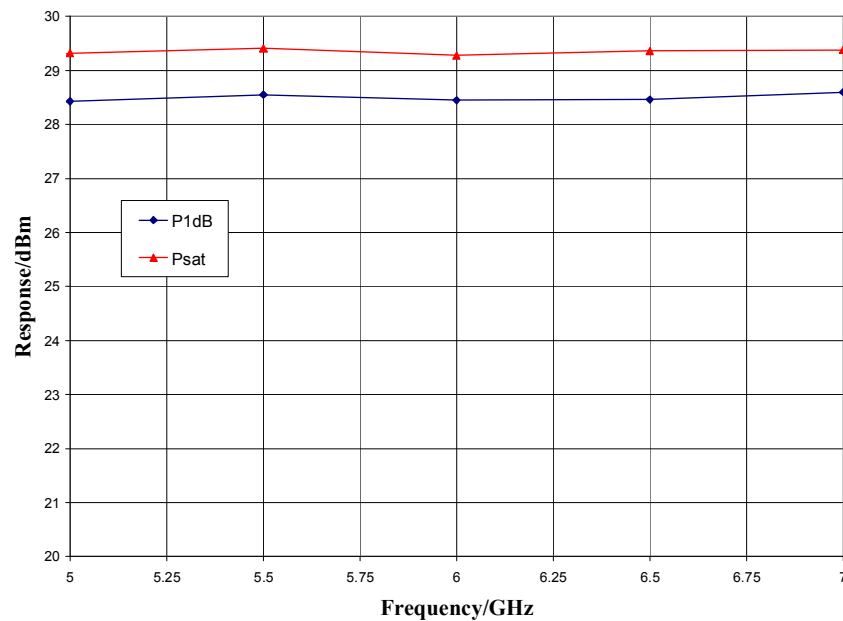


ver 1.0 1012

Typical Performance

P1dB vs. Temperature, $V_{dd} = 7.0$ V, $V_{en} = 3.0$ V

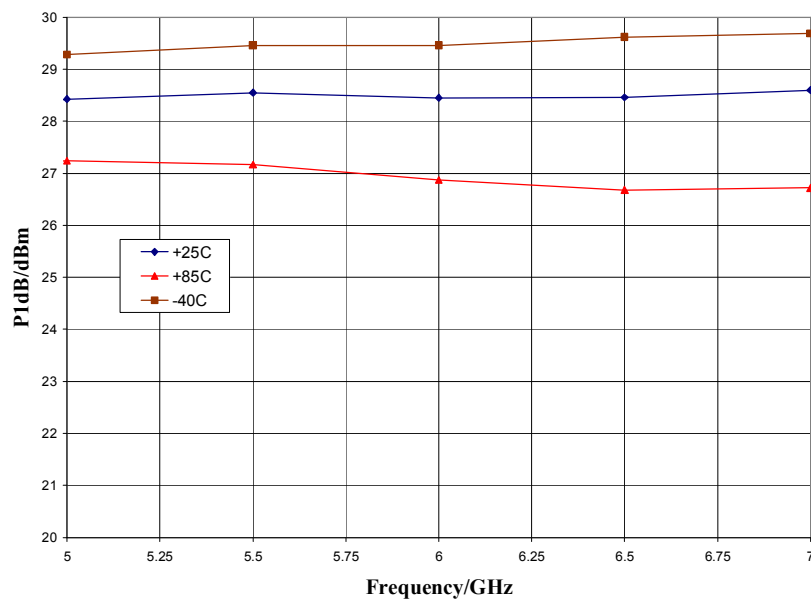


Output IP3 vs. Temperature, $V_{dd} = 7.0$ V, $V_{en} = 3.0$ V

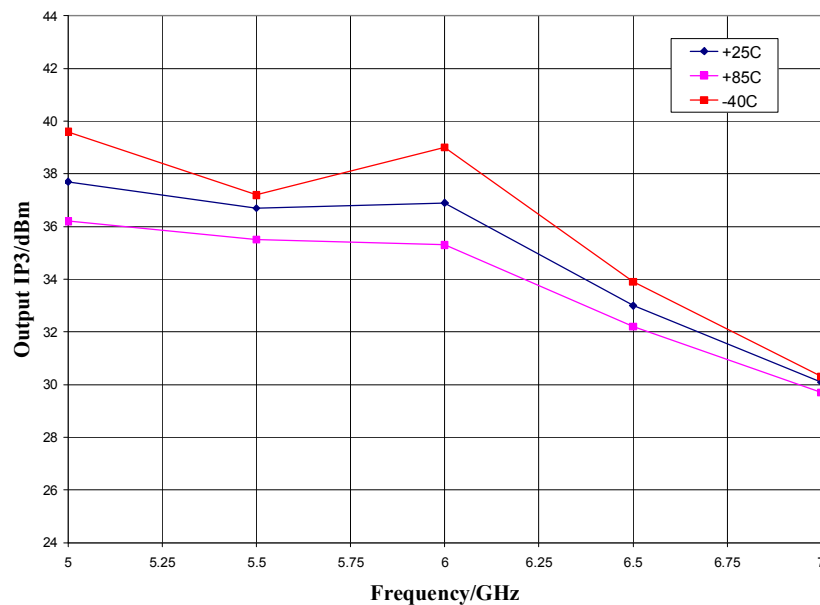

ver 1.0 1012

Mechanical Information

Package Information and Dimensions

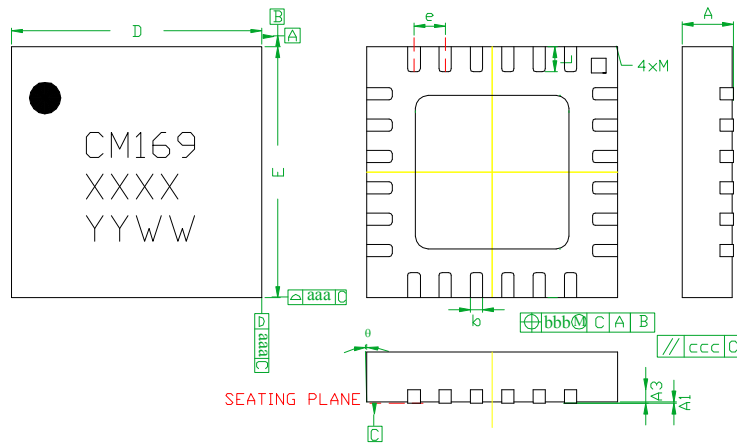


SYMBOLS	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	0.80	0.90	1.00
A1	0	0.02	0.05
A3	---	0.25REF.	---
b	0.18	0.23	0.30
D	3.85	4.00	4.15
D1	---	2.45BSC	---
E	3.85	4.00	4.15
E1	---	2.45BSC	---
e	---	0.50BSC	---
L	0.30	0.40	0.50
ø	0	---	12
aaa	---	0.25	---
bbb	---	0.10	---
ccc	---	0.10	---
M	---	---	0.05

NOTES:


1. DIMENSIONS ARE IN MILLIMETERS
2. RoHS COMPLIANT MOLD COMPOUND
3. LEADFRAME MATERIAL: COPPER ALLOY
4. LEAD FINISH: 100% MATTE Sn
5. INDICATED DIMENSION/TOLERANCE APPLIES TO LEADS AND EXPOSED PAD

Recommended PCB Land Pattern



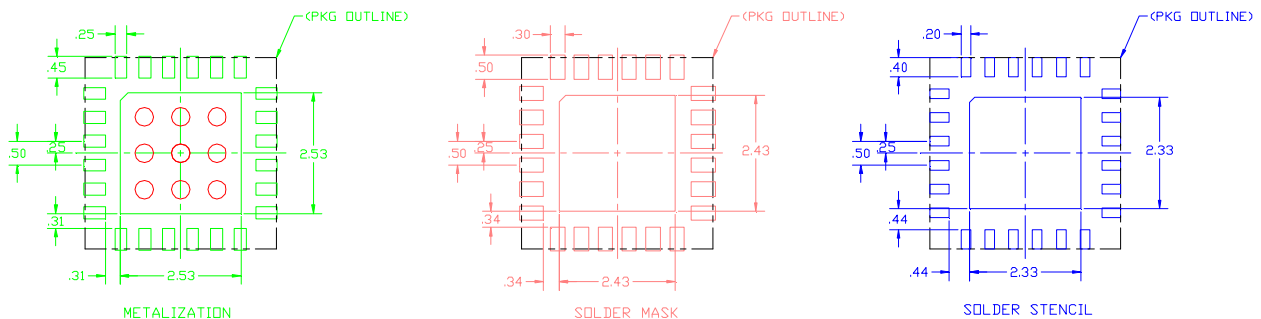


Pin Description

Pin Diagram

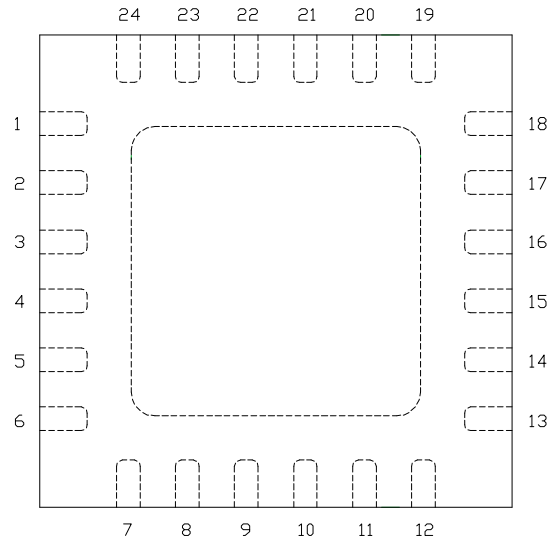


Functional Description

Pad	Function	Description	Schematic
2	RF in	DC blocked and 50 ohm matched	
4	Ven	Power supply enable voltage Decoupling and bypass caps required	
17	RF out	DC blocked and 50 ohm matched	
19	Vdet	Detector voltage	
21	Vdd	Power supply voltage Decoupling and bypass caps required	
1,3,16,18 and die paddle	Ground	Connect to RF / DC ground	

ver 1.0 1012

Applications Information

Application Circuit

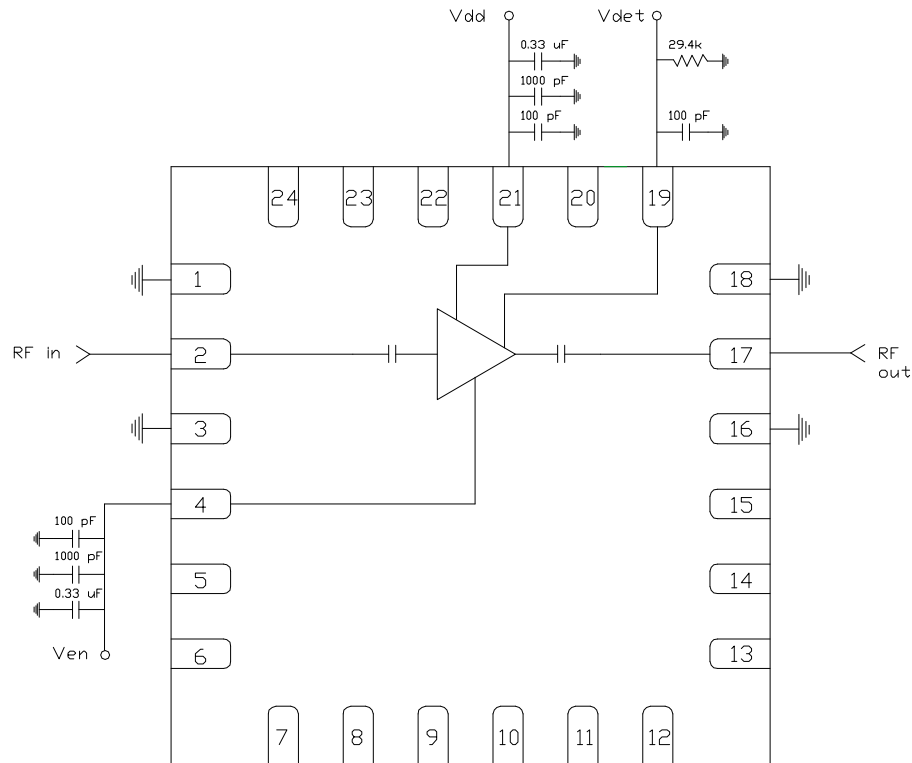

Biasing and Operation

The CMD169P4 is biased with a positive drain supply and positive enable supply.

Turn ON procedure:

1. Apply drain voltage V_{dd} and set to +7 V
2. Apply enable voltage V_{en} and set to +3 V

Turn OFF procedure:

1. Turn off enable voltage V_{en}
2. Turn off drain voltage V_{dd}


RF power can be applied at any time.

GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

ver 1.0 1012

Applications Information

Evaluation Board

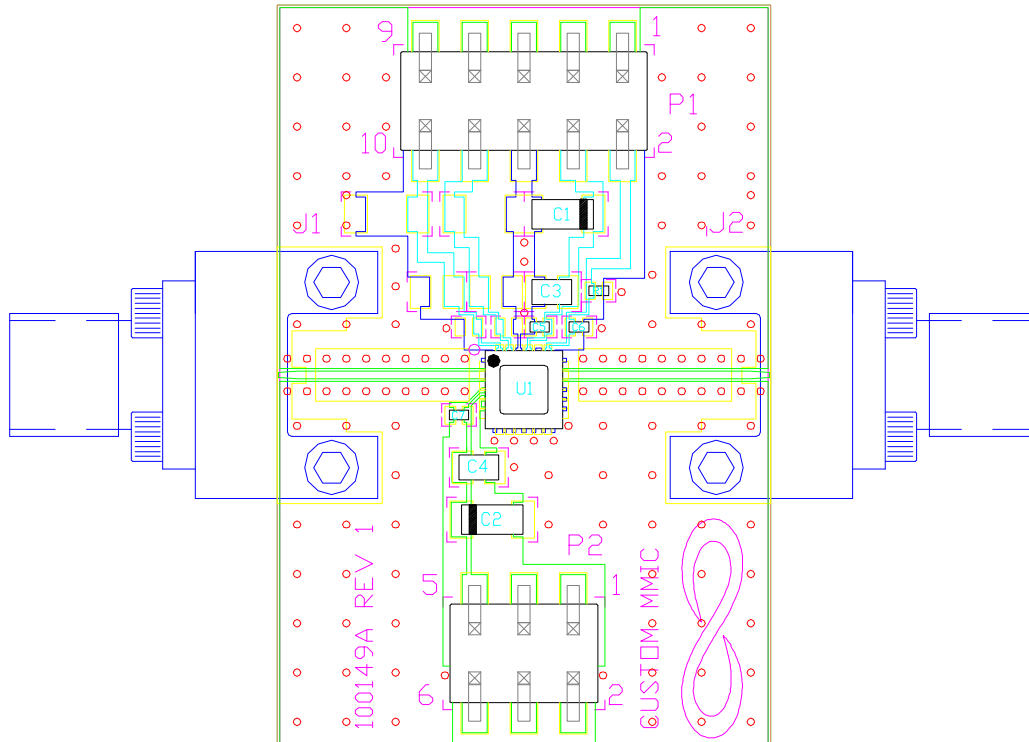

Bill of Material

Designator	Value	Description
J1, J2		SMA End Launch Connector
P1		10 Pin DC Header
P2		6 Pin DC Header
C1, C2	0.33 μ F	Capacitor, Tantalum
C3, C4	1000 pF	Capacitor, 0603
C5 - C7	100 pF	Capacitor, 0402
R1	29.4 k Ω	Resistor, 0402
U1		CMD169P4 Driver Amplifier
PCB		100149A Evaluation PCB

ver 1.0 1012