


剥线尺寸
stripping dimension

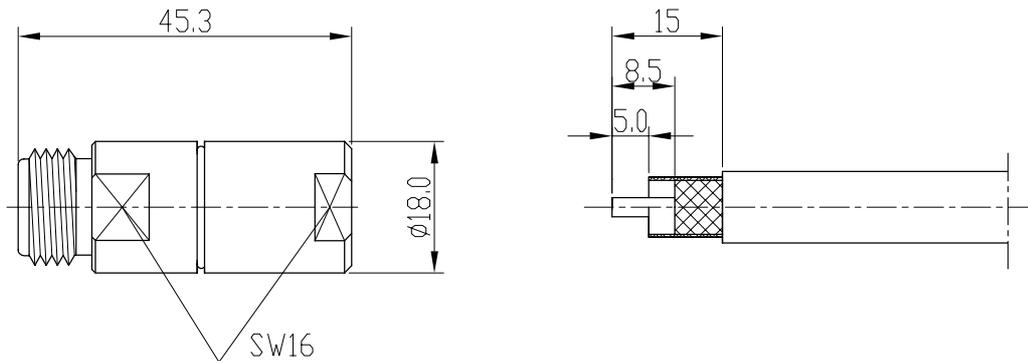

产品型号 type	电缆型号 cable type
N-K631	7D-FB
N-K635	8D-FB

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~3Ghz
3. Contact resistance
Center conductor: ≤ 1.0 m Ω
Out conductor: ≤ 0.2 m Ω
4. Insulation resistance: ≥ 5000 M Ω
5. Insulator withstanding: 1500V
6. VSWR: ≤ 1.3
7. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~3Ghz
3. 接触电阻:
中心导体: ≤ 1.0 m Ω
外导体: ≤ 0.2 m Ω
4. 绝缘电阻: ≥ 5000 M Ω
5. 介质耐压: 1500V
6. 电压驻波比: ≤ 1.3
7. 插拔次数: 500次

Application: MIL-C-39012/1E

执行标准: MIL-C-39012/1E

Material & Finishing

1. Center contact :
Female: phosphor bronze, gold plated
2. Bodies and other metal parts:
brass, nickel plated
3. Insulators: PTFE
4. Gasket: silicone rubber

材料和镀层

1. 中心接触件:
插孔: 锡磷青铜, 镀金
2. 壳体和其它金属零件:
黄铜, 镀镍
3. 绝缘子: 聚四氟乙烯
4. 密封圈: 硅橡胶

 	SCALE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X \pm .15 $\pm 1^\circ$.XX \pm .05 .XXX \pm
	1:1	
	N-K631	<p>西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.</p>
	RF COAXIAL CONNECTOR	
DRAWN	NAME	
CHECKED	DATE	
APPROVED		